



i3300

INDUSTRIAL LABEL PRINTER

No waste. More labels. Less effort.

About BRADY



Once you have worked with BRADY, our name will stick with you, (just like our labels) because BRADY is one of the world's leading labelling and identification specialists.

Innovative

At BRADY we continue to improve. We have many customers from all industries, and we strive to be ahead of their needs by continuing to invest in research for even more performant solutions. By developing more user-friendly and efficient concepts, we give our thousands of customers the best in the market.

Strength

At BRADY, we believe our biggest strength is the wide range of identification and safety solutions we can offer our customers, whether it's labelling the smallest component or complete signage for an entire warehouse. We're also proud to offer many products and services - from printers, scanners and software to service contracts and on-site training - that compliment any identification job. And don't forget, our wide network of expert distributors can always offer you a tailor-made solution to meet your specific requirements.

Trust

For over a hundred years, BRADY has been connected with quality, trust and stability. We demand the best for your products and services, because we know, better than anyone, the importance of good and reliable identification. Identification looks like a small detail, but every professional knows that this kind of detail is crucial to any business.

Inform

We also have specialised dealers in your region, who can answer all your identification, safety and labelling questions, specific to your activity. They will be happy to provide you with all kinds of options and solutions with no obligation.

Microsoft is a trademark of Microsoft Corporation, Bluetooth is a trademark of Bluetooth Sig, Inc., Android is a trademark of Google Inc.



Brady products are sold on the condition that the purchaser will test them in actual use and determine for himself/herself their suitability to his/her intended purpose. Brady warrants to the purchaser that Brady products are free from defects in material and workmanship but limits its obligation under this warranty to the replacement of the product which has been shown to Brady's satisfaction to have been defective at the time of its purchase.

The warranty does not extend to any persons who have acquired the product from the purchaser. It is in lieu of any other warranty, including every warranty of sale-ability, marketability or suitability for the intended purpose, and is also in lieu of any other obligation or liability on the part of Brady.

Under no circumstances will Brady be liable for losses, damage, costs or subsequent damage of whatever nature which may arise in connection with the use of, or inability to use, Brady's products.

Print any label or sign with the versatile **BradyPrinter i3300 Industrial Label Printer**

The Brady Advantage

When it comes to identification, safety and compliance, there's a clear advantage to working with Brady. We put our customers first in everything we do.

Our goal is to give you an unrivalled customer experience. We are relentlessly committed to performance and excellence - in our products, services and people.


Our products and solutions perform in ways that others simply can't match. Our people perform in ways that regularly exceed your expectations. And our focus and discipline work toward solid, long-term performance for our customers.

In short, Brady is the company you trust when performance matters most.

Table of contents

- 4 BradyPrinter i3300 introduction
- 5 BradyPrinter i3300 at a glance
- 6 BradyPrinter i3300 kits and accessories
- 7 Applications
- 9 Media offering
- 10 Print ribbon/material compatibility
- 11 Facility & safety identification
- 22 Electrical / Datacom identification
- 36 Product & general purpose identification
- 42 Electronics identification
- 44 Laboratory identification
- 53 Master material index
- 58 Software
- 59 BradyPrinter i3300 specifications

Learn more about the Brady Advantage at:
www.bradyeurope.com



PRINT ANY LABEL OR SIGN WITH THE VERSATILE BRADYPRINTER I3300 INDUSTRIAL LABEL PRINTER

The BradyPrinter i3300 Industrial Label Printer is a completely hassle free, easy to use PC-based printer. It can print a full range of safety and facility labels and signs as well as die cut labels for wire identification, product identification and laboratory identification.



▶ Scan or click the QR code



PRINT A HUGE RANGE OF LABELS & SIGNS

With the BradyPrinter i3300, you can print a huge range of reliable labels and signs at your location in monocolour. More than 50 different Brady label materials are compatible with the BradyPrinter i3300, including:

- ▶ wire & cable identification labels
- ▶ product and laboratory identification labels
- ▶ safety and facility signs

The BradyPrinter i3300 prints on Brady's industrial grade labels that have been designed to last in challenging conditions. All Brady labels have been tested in line with international ASTM test methods and a technical data sheet is available for every material.

EXTREMELY EASY TO USE


The BradyPrinter i3300 is extremely easy to use and features auto-calibration and automatic label material setup. This will enable you to immediately start printing the signs and labels you need. Switching to another label material is easy and extremely fast thanks to the printer's 'drop-in' label materials and matching ink ribbons that can be switched out in less than 20 seconds. When used with Brady Workstation apps, a wide variety of sign & label design options becomes available.

BRADYPRINTER I3300 TOP FEATURES




No wasting labels with print smart technology

Print on every label or sleeve – no more blank first label. With print smart technology, the printer, labels, ribbons and software all work together for efficient label setup. It's all in the smart chip embedded in Brady materials – it stores the material size, type, colour, quantity and compatibility, and sets proper burn settings, sensor alignment and print speed. When installed, the chip sends that information to the printer and desktop software and auto calibrates without wasting any labels – and you get fast material setup and creation, without the waste.

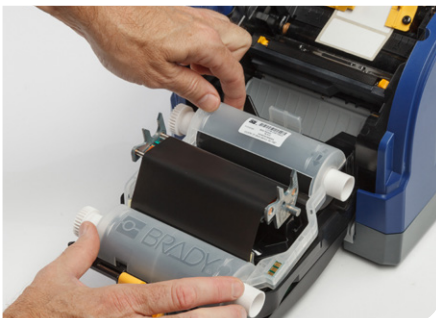

Get no-hassle, 20-second material changeovers

Forget fumbling around with ribbon rolls that are great at rolling away or threading material around rollers or print heads. Switch to a new way of material changeovers with the BradyPrinter i3300 Industrial Label Printer. The easy-to-load label rolls and self-contained ribbons snap into place for easy 20-second material changeovers without cumbersome sensor adjustments. Switch materials frequently throughout the day? You'll save time to work on your more important tasks.

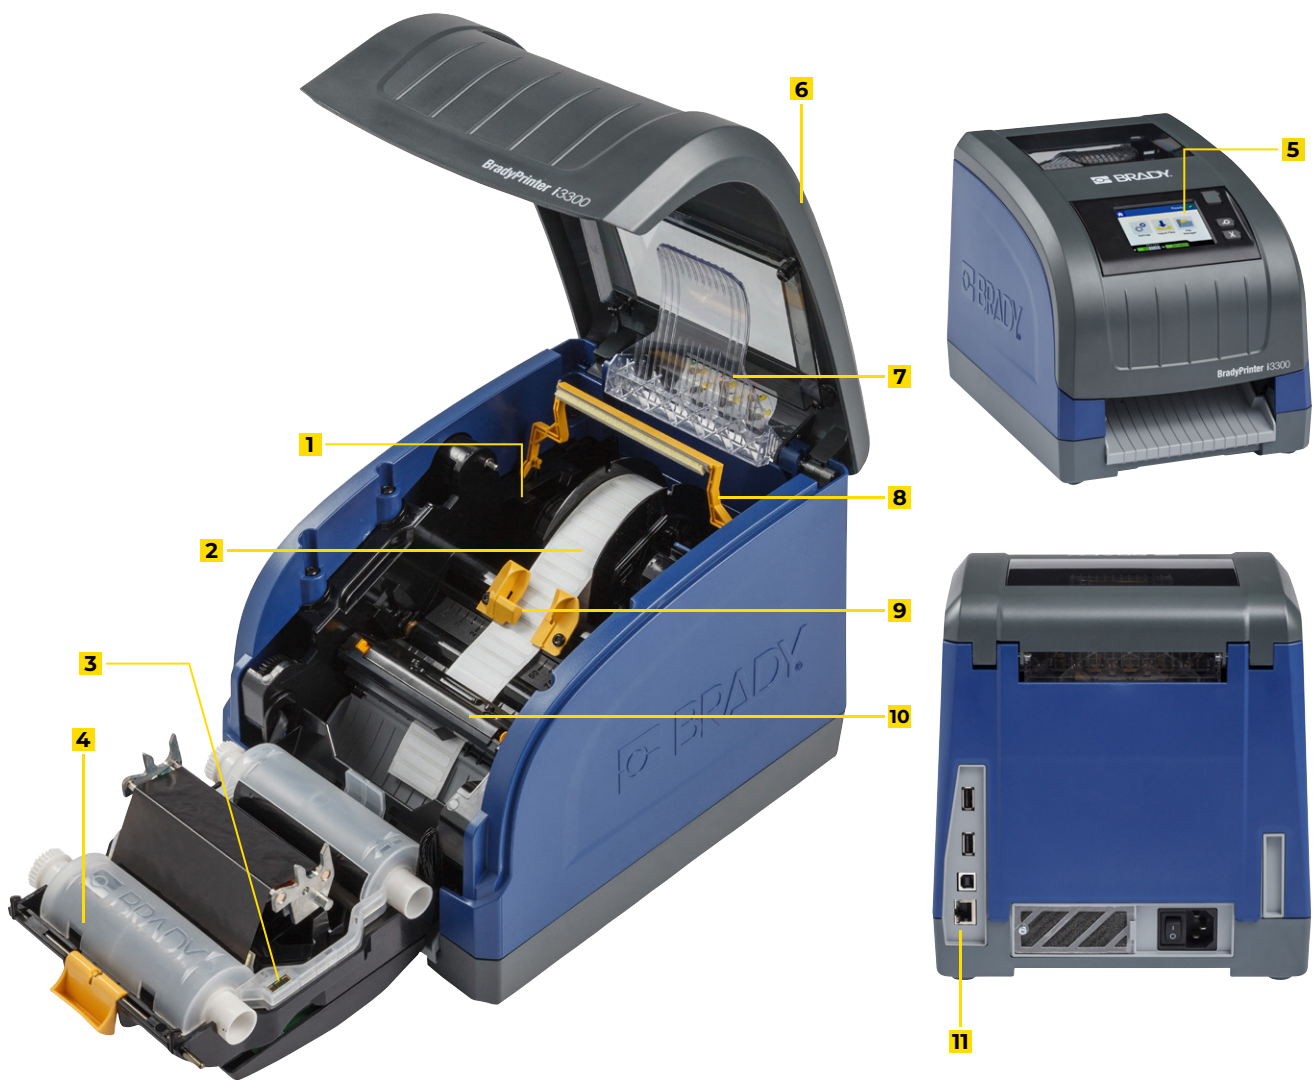

1 Media roll cartridge with auto part detection
Printer auto-detects installed label part, communicating printer setting and part setup information to both printer and Brady software

2 20-second media roll changeover
Media cartridge roll drops in and out of place quickly with minimal thread-through, no sensor adjustment, no calibration and no label waste

3 Ribbon cartridge with auto part detection
Printer auto-detects installed ribbon part, then sets correct print heat level and shows a warning if incorrect ribbon is used

4 5-second ribbon changeover
Ribbon cartridge snaps into place in one quick motion and guarantees the ink always faces the right direction to the print head

5 Colour touchscreen control panel
Icons and sliders for easy printer setting adjustments and on-display part information and amount remaining

6 Top-loading design
Reduces footprint in your work area and simplifies media alignment and loading

7 Double-sided PermaSleeve bridge
Lowered into place to allow printing second side of double-sided PermaSleeve wire markers

8 Media wiper arm
Ensures dust-free surface and high print quality when printing large ink areas on continuous media. Felt pads are field-replaceable

9 Sensors located in guides
Label sensor is always correctly positioned as guides are closed, meaning no sensor location trial and error, no calibration required and no wasted labels

10 Integrated auto cutter
Built-in cutter for complete cut-through of media between labels, at end of job, or no cut at all

11 Interface options
2x USB, 1x USB 2.0, 1x Ethernet

Printer

Article No.	Order Ref.	Description
149553	i3300-C-EU	i3300 Industrial Label Printer- EU
322883	i3300-C-EU-BWS	i3300 Industrial Label Printer- EU + Brady Workstation Suite*
149555	i3300-300-C-UK	i3300 Industrial Label Printer- UK
322884	i3300-C-UK-BWS	i3300 Industrial Label Printer- UK + Brady Workstation Suite*
149551	i3300-300-C-US	i3300 Industrial Label Printer- US
322885	i3300-C-US-BWS	i3300 Industrial Label Printer- US + Brady Workstation Suite*
149554	i3300-C-EU-WF	i3300 Industrial Label Printer with Wifi- EU
322887	i3300-C-EU-W-BWS	i3300 Industrial Label Printer with Wi-Fi - EU + Brady Workstation Suite*
149556	i3300-300-C-UK-WF	i3300 Industrial Label Printer with Wi-Fi- UK
322888	i3300-C-UK-W-BWS	i3300 Industrial Label Printer with Wi-Fi- UK + Brady Workstation Suite*
149552	i3300-300-C-US-WF	i3300 Industrial Label Printer with Wi-Fi - US
322889	i3300-C-US-W-BWS	i3300 Industrial Label Printer with Wi-Fi- US + Brady Workstation Suite*



This i3300 printer comes in a cardboard box. It ships with a power cord, a USB cable, a product CD holding the manual, a cleaning kit and a printed quick start guide.

All printer configurations include the Brady Workstation Essentials software.

*Configurations with 'BWS' in the order reference include the extended Brady Workstation Pro license.

Accessories

Article No.	Order Ref.	Description
036612	Squeegee	Squeegee
120994	B30-TROLLEY	Trolley for S3100, i3300
133251	PCK-6	Printer Cleaning Kit, Thermal Transfer Printers
142114	B31-WIPER	Media Wiper 5 Pack
142116	B31-CCT	Cutter Cleaning Tool for BBP30, BBP31, BBP33, S3100, i3300, S3700



Application kits

Article No.	Order Ref.	Description
199986	B30-FLOOR-KIT	Floor marking kit for BBP35/BBP37/S3xxx/i3300 printers
195963	B30-SAFETY-KIT	General safety kit for BBP3x Printers
195962	B30-PM-KIT	Pipe marking kit for BBP3x Printers
195961	B30-CLP-KIT	Pre-printed GHS/CLP Chemical Labels kit for BBP3x Printers



Facility & Safety Identification



Safety signs



Pipe markers




Machine safety labels and tags



CLP/GHS Labels



Warehouse identification

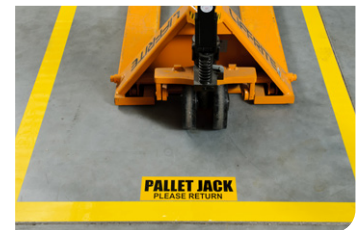

Floormarking

Electrical, voice/datacom identification



Control panel labels



Self-laminating wire & cable markers



Inside panel component labels



Fibre optic cable markers



Cable tags



Wire marking sleeves

General & industrial identification



Rating plate labels




Name plates



Rough surface labels

APPLICATIONS

Electronics identification




Electronic component labels



High resistant labels



Static dissipative labels



High-temperature identification labels


Laboratory identification & sample tracking



Centrifuge & PCR tube labels



Conical & large tube labels

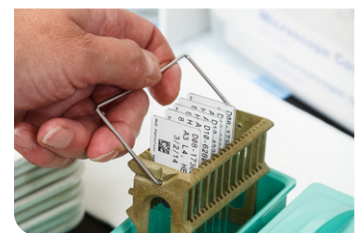

Slide labels



Tissue cassette labels



Water dissolvable labels



Well plate labels

MEDIA OFFERING

We continuously enhance our label material offering. Check regularly for firmware upgrades to gain access to the newest materials.

Material	
B-342	Heat-shrink Polyolefin
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride
B-348	Polyolefin
B-413	Metallic, Non-metal Polyester
B-417	Self-laminating Vinyl
B-422	Polyester
B-423	Polyester
B-424	Paper
B-425A	Polypropylene
B-427	Self-laminating Vinyl
B-428	Metallised Polyester
B-428/B-966B	Metallised Polyester with Polyester Overlaminate
B-430	Polyester
B-432	Polyester
B-434A	Metallised Polyester
B-435A	Metallised Polyester
B-437	Polyvinylfluoride
B-438	Tamper-evident Metallised Polyester
B-439	Vinyl
B-461	Self-laminating Polyester
B-472	Polyimide
B-480A	Metallic, Non-metal Polyester

Material	
B-481	StainerBondz™ Polyester
B-482	Polyester
B-483A	Polyester
B-483A/B-634	Polyester with Polyester Overlaminate
B-486B	Metallised Polyester
B-488	Polyester
B-489A	Polyester
B-490	FreezerBondz™ Polyester
B-492	FreezerBondz™ Polyester
B-498	Vinyl Cloth
B-499	Nylon Cloth
B-509	Magnetic Polyester
B-526	Phosphorescent Polyester
B-549	Polyester
B-551	Polyester
B-565	Metallised Polyester
B-569	Polyester
B-581	Vinyl
B-584	Reflective Tape
B-593	Polyester
B-595	Vinyl
B-618	Polyester
B-719	Polyimide
B-724	Polyimide

Material	
B-728	Polyimide
B-729	Polyimide
B-7425	Polypropylene
B-7563	Metallised Polyester
B-7569	Vinyl
B-7597	Polyethylene
B-7598	Polyester
B-7599	Polyethylene
B-7641	Heat-shrink Polyolefin
B-7642	Heat-shrink Polyolefin
B-7643	Thermoplastic Polyether Polyurethane
B-767	Static Dissipative Polyimide
B-768	Static Dissipative Polyimide
B-7696	Vinyl
B-777	Polyimide
B-787	Polyvinylfluoride
B-797	Polyimide
B-8423	Polyester
B-854	Metal Detectable Polyester
B-855	Polyester
B-8591	Polymer

Next to 800+ standard parts available including more than 51 label materials, customers can also offer their own label specification for custom materials, shapes, sizes, colours and layouts that can be printed on the BradyPrinter i3300.

▶ See pages 49-53 for a detailed material index.

PRINT RIBBONS

“Drop & Click” Print ribbons for quick and easy supply changes

Order Reference	Colour	Width (mm)	Length (m)
B30-R10000	Black	110.00	60.00
B30-R10000-BL	Blue	110.00	60.00
B30-R10000-GN	Green	110.00	60.00
B30-R10000-OR	Orange	110.00	60.00
B30-R10000-RD	Red	110.00	60.00
B30-R10000-WT	White	110.00	60.00
B30-R10000-YL**	Yellow	110.00	60.00
B30-R6000HF	Black	110.00	60.00
B30-R4300	Black	110.00	60.00
B30-R6600	Black	110.00	60.00
B30-R4400-WT	White	110.00	60.00
B30-R4500*	Silver	110.00	60.96
B30-R6700-WT	White	110.00	60.00
B30-R6400	Black	110.00	60.00
B30-R6200	Black	110.00	60.00
B30-R10000-YL2**	Yellow	110.00	60.00
B30-R6000C***	Black	110.00	60.00
B30-R6300	Black	109.98	60.96



- ▶ Tough, smear-proof ribbons that produce long-lasting printed text
- ▶ Print can withstand years in industrial areas and outdoor conditions
- ▶ Ribbons supplied in self-contained cartridges that drop straight into the printer with a “click”
- ▶ No calibrating, no threading, no waste, no hassle and the ink will always be facing the right direction
- ▶ Printer notifies user if installed ribbon is not recommended for the installed labels

* This ribbon is for use with B-342 and B-345 black PermaSleeves only

** For printing yellow onto white B-595 use B30-R10000-YL. For printing yellow onto other colours of B-595 use B30-R10000-YL2

*** Black Heavy-Duty print ribbon to print Ochre B-595

PRINT RIBBON/MATERIAL COMPATIBILITY

B-number	Material		B30-R4300 Black	B30-R4400-WT White	B30-R4500* Silver	B30-R600HF Black	B30-R6200 Black	B30-R6300 Black	B30-R6400 Black	B30-R6600 Black	B30-R6700-WT White	B30-R10000 Black	B30-R10000-WT White	B30-R10000 Blue	B30-R10000-YL2** Yellow
B-342	Heat-shrink Polyolefin	Matt	✓		✓					✓					
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride	Matt		✓		✓				✓					
B-413	Metallic, Non-metal Polyester	Satin				✓	✓	✓							
B-417	Self-laminating Vinyl	Matt	✓				✓	✓							
B-422	Polyester	Gloss				✓	✓	✓							
B-423	Polyester	Gloss				✓	✓	✓							
B-424	Paper	Matt	✓												
B-425A	Polypropylene	Matt	✓						✓						
B-427	Self-laminating Vinyl	Matt	✓												
B-428/ B-966B	Metallised Polyester with Polyester Overlaminated	Gloss	✓				✓	✓							
B-428	Metallised Polyester	Matt	✓												
B-430	Polyester	Gloss		✓		✓	✓	✓							
B-432	Polyester	Gloss		✓		✓									
B-434A	Metallised Polyester	Gloss				✓									
B-435A	Metallised Polyester	Gloss				✓									
B-437	Polyvinylfluoride	Matt	✓												
B-438	Tamper-evident Metallised Polyester	Matt	✓									✓			
B-439	Vinyl	Gloss													
B-461	Self-laminating Polyester	Matt	✓				✓	✓							
B-472	Polyimide	Matt	✓				✓	✓							
B-481	StainerBondz™ Polyester	Matt							✓						
B-482	Polyester	Matt							✓						
B-483A	Polyester	Gloss				✓									
B-484A	Polyester	Gloss				✓									
B-486B	Metallised Polyester	Matt	✓												
B-488	Polyester	Matt	✓												
B-489A	Polyester	Matt	✓												
B-490	FreezerBondz™ Polyester	Matt	✓												
B-492	FreezerBondz™ Polyester	Matt							✓						
B-498	Vinyl Cloth	Semi-gloss	✓				✓	✓							
B-499	Nylon Cloth	Matt	✓			✓	✓	✓							
B-509	Magnetic Polyester	Matt				✓						✓		✓	
B-526	Phosphorescent Polyester	Gloss				✓						✓		✓	
B-549	Polyester	Gloss							✓			✓	✓	✓	
B-551	Polyester	Matt				✓						✓		✓	
B-565	Metallised Polyester	Matt				✓						✓		✓	
B-569	Polyester	Gloss				✓						✓	✓	✓	
B-581	Vinyl	Gloss				✓						✓	✓	✓	
B-584	Reflective Tape	Gloss				✓						✓		✓	
B-593	Polyester	Gloss		✓		✓									
B-595	Vinyl	Gloss				✓				✓	✓	✓	✓	✓	✓
B-618	Polyester	Matt													
B-718	Polyimide	Gloss				✓									
B-719	Polyimide	Matt				✓									
B-724	Polyimide	Matt	✓												
B-728	Polyimide	Matt				✓									
B-729	Polyimide	Matt				✓									
B-767	Static Dissipative Polyimide	Gloss													
B-768	Static Dissipative Polyimide	Gloss													
B-777	Polyimide	Gloss													
B-787	Polyvinylfluoride	Gloss				✓									
B-797	Polyimide	Gloss													
B-854	Metal Detectable Polyester	Matt				✓									
B-855	Polyester	Matt				✓									
B-7563	Metallised Polyester	Satin				✓	✓	✓							
B-7569	Vinyl	Gloss				✓						✓	✓	✓	
B-7597	Polyethylene	Matt	✓												
B-7641	Heat-shrink Polyolefin	Matt				✓									
B-7642	Heat-shrink Polyolefin	Matt	✓						✓						
B-8423	Polyester	Satin				✓	✓	✓							
B-8591	Polymer	Gloss								✓					

*This ribbon is for use with B-342 and B-345 Black PermaSleeves only.

**For printing yellow onto white B-595 use B30-R10000-YL. For printing yellow onto other colours of B-595 use B30-R10000-YL2.

FACILITY & SAFETY IDENTIFICATION




B-595 High performance indoor/outdoor vinyl

For general facility and safety identification: our best industrial vinyl yet

- ▶ Durable, low-shrink vinyl with our most aggressive adhesive
- ▶ Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- ▶ Adheres to “difficult low-surface energy items (PVC piping, blow-moulded equipment cases, ABS plastics, recycled plastics)

Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-500-595-BK	Black	12.70	30.48	B30-R10000-WT
∞	B30C-500-595-BL	Blue	12.70	30.48	B30-R10000-WT
∞	B30C-500-595-BR	Brown	12.70	30.48	B30-R10000-WT
∞	B30C-500-595-GD	Gold	12.70	30.48	B30-R10000
∞	B30C-500-595-GN	Green	12.70	30.48	B30-R10000-WT
∞	B30C-500-595-GY	Grey	12.70	30.48	B30-R10000
∞	B30C-500-595-OR	Orange	12.70	30.48	B30-R10000
∞	B30C-500-595-PK	Pink	12.70	30.48	B30-R10000
∞	B30C-500-595-PL	Purple	12.70	30.48	B30-R10000-WT
∞	B30C-500-595-RD	Red	12.70	30.48	B30-R10000-WT
∞	B30C-500-595-CL	Transparent	12.70	30.48	B30-R10000
∞	B30C-500-595-WT	White	12.70	30.48	B30-R10000
∞	B30C-500-595-YL	Yellow	12.70	30.48	B30-R10000
∞	B30C-1125-595-BK	Black	28.58	30.48	B30-R10000-WT
∞	B30C-1125-595-BL	Blue	28.58	30.48	B30-R10000-WT
∞	B30C-1125-595-BR	Brown	28.58	30.48	B30-R10000-WT
∞	B30C-1125-595-GD	Gold	28.58	30.48	B30-R10000
∞	B30C-1125-595-GN	Green	28.58	30.48	B30-R10000-WT
∞	B30C-1125-595-GY	Grey	28.58	30.48	B30-R10000
∞	B30C-1125-595-OC	Ochre	28.58	30.48	B30-R10000
∞	B30C-1125-595-OR	Orange	28.58	30.48	B30-R10000
∞	B30C-1125-595-PK	Pink	28.58	30.48	B30-R10000
∞	B30C-1125-595-PL	Purple	28.58	30.48	B30-R10000-WT
∞	B30C-1125-595-RD	Red	28.58	30.48	B30-R10000-WT
∞	B30C-1125-595-CL	Transparent	28.58	30.48	B30-R10000
∞	B30C-1125-595-WT	White	28.58	30.48	B30-R10000
∞	B30C-1125-595-YL	Yellow	28.58	30.48	B30-R10000
∞	B30C-2250-595-BK	Black	57.15	30.48	B30-R10000-WT
∞	B30C-2250-595-BL	Blue	57.15	30.48	B30-R10000-WT
∞	B30C-2250-595-BR	Brown	57.15	30.48	B30-R10000-WT
∞	B30C-2250-595-GD	Gold	57.15	30.48	B30-R10000
∞	B30C-2250-595-GN	Green	57.15	30.48	B30-R10000-WT
∞	B30C-2250-595-GY	Grey	57.15	30.48	B30-R10000
∞	B30C-2250-595-OC	Ochre	57.15	30.48	B30-R10000
∞	B30C-2250-595-OR	Orange	57.15	30.48	B30-R10000
∞	B30C-2250-595-PK	Pink	57.15	30.48	B30-R10000
∞	B30C-2250-595-PL	Purple	57.15	30.48	B30-R10000-WT
∞	B30C-2250-595-RD	Red	57.15	30.48	B30-R10000-WT
∞	B30C-2250-595-CL	Transparent	57.15	30.48	B30-R10000
∞	B30C-2250-595-WT	White	57.15	30.48	B30-R10000
∞	B30C-2250-595-YL	Yellow	57.15	30.48	B30-R10000
∞	B30C-3000-595-WT	White	76.20	30.48	B30-R10000




>>

FACILITY & SAFETY IDENTIFICATION



B-595 High performance indoor/outdoor vinyl (continued)

Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-3000-595-YL	Yellow	76.20	30.48	B30-R10000
∞	B30C-4000-595-BK	Black	101.60	30.48	B30-R10000-WT
∞	B30C-4000-595-BL	Blue	101.60	30.48	B30-R10000-WT
∞	B30C-4000-595-BR	Brown	101.60	30.48	B30-R10000-WT
∞	B30C-4000-595-GD	Gold	101.60	30.48	B30-R10000
∞	B30C-4000-595-GN	Green	101.60	30.48	B30-R10000-WT
∞	B30C-4000-595-GY	Grey	101.60	30.48	B30-R10000
∞	B30C-4000-595-LB	Light Blue	101.60	30.48	B30-R10000
∞	B30C-4000-595-OC	Ochre	101.60	30.48	B30-R10000
∞	B30C-4000-595-OR	Orange	101.60	30.48	B30-R10000
∞	B30C-4000-595-PK	Pink	101.60	30.48	B30-R10000
∞	B30C-4000-595-PL	Purple	101.60	30.48	B30-R10000-WT
∞	B30C-4000-595-RD	Red	101.60	30.48	B30-R10000-WT
∞	B30C-4000-595-CL	Transparent	101.60	30.48	B30-R10000
∞	B30C-4000-595-WT	White	101.60	30.48	B30-R10000
∞	B30C-4000-595-YL	Yellow	101.60	30.48	B30-R10000




B-569 High performance polyester

For labelling stainless steel and smooth surfaces

- ▶ Low-halide content for labelling stainless steel pipes and surfaces
- ▶ Applies best to very smooth surfaces and ideal for mounting to rigid panels

Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-500-569-BK	Black	12.70	30.48	B30-R10000-WT
∞	B30C-500-569-BL	Blue	12.70	30.48	B30-R10000-WT
∞	B30C-500-569-BR	Brown	12.70	30.48	B30-R10000-WT
∞	B30C-500-569-GN	Green	12.70	30.48	B30-R10000-WT
∞	B30C-500-569-GY	Grey	12.70	30.48	B30-R10000
∞	B30C-500-569-LB	Light Blue	12.70	30.48	B30-R10000
∞	B30C-500-569-OR	Orange	12.70	30.48	B30-R10000
∞	B30C-500-569-PK	Pink	12.70	30.48	B30-R10000
∞	B30C-500-569-PL	Purple	12.70	30.48	B30-R10000-WT
∞	B30C-500-569-RD	Red	12.70	30.48	B30-R10000-WT
∞	B30C-500-569-SB	Sky Blue	12.70	30.48	B30-R10000
∞	B30C-500-569-TN	Tan	12.70	30.48	B30-R10000
∞	B30C-500-569-CL	Transparent	12.70	30.48	B30-R10000
∞	B30C-500-569-WT	White	12.70	30.48	B30-R10000
∞	B30C-500-569-YL	Yellow	12.70	30.48	B30-R10000
∞	B30C-1125-569-BK	Black	28.58	30.48	B30-R10000-WT




>>



B-569 High performance polyester (continued)

Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-569-BL	Blue	28.58	30.48	B30-R10000-WT
∞	B30C-1125-569-BR	Brown	28.58	30.48	B30-R10000-WT
∞	B30C-1125-569-GN	Green	28.58	30.48	B30-R10000-WT
∞	B30C-1125-569-GY	Grey	28.58	30.48	B30-R10000
∞	B30C-1125-569-LB	Light Blue	28.58	30.48	B30-R10000
∞	B30C-1125-569-OC	Ochre	28.58	30.48	B30-R60000C, B30-R10000
∞	B30C-1125-569-OR	Orange	28.58	30.48	B30-R10000
∞	B30C-1125-569-PK	Pink	28.58	30.48	B30-R10000
∞	B30C-1125-569-PL	Purple	28.58	30.48	B30-R10000-WT
∞	B30C-1125-569-RD	Red	28.58	30.48	B30-R10000-WT
∞	B30C-1125-569-SB	Sky Blue	28.58	30.48	B30-R10000
∞	B30C-1125-569-TN	Tan	28.58	30.48	B30-R10000
∞	B30C-1125-569-CL	Transparent	28.58	30.48	B30-R10000
∞	B30C-1125-569-WT	White	28.58	30.48	B30-R10000
∞	B30C-1125-569-YL	Yellow	28.58	30.48	B30-R10000
∞	B30C-2250-569-BK	Black	57.15	30.48	B30-R10000-WT
∞	B30C-2250-569-BL	Blue	57.15	30.48	B30-R10000-WT
∞	B30C-2250-569-BR	Brown	57.15	30.48	B30-R10000-WT
∞	B30C-2250-569-GN	Green	57.15	30.48	B30-R10000-WT
∞	B30C-2250-569-GY	Grey	57.15	30.48	B30-R10000
∞	B30C-2250-569-LB	Light Blue	57.15	30.48	B30-R10000
∞	B30C-2250-569-OC	Ochre	57.15	30.48	B30-R60000C, B30-R10000
∞	B30C-2250-569-OR	Orange	57.15	30.48	B30-R10000
∞	B30C-2250-569-PK	Pink	57.15	30.48	B30-R10000
∞	B30C-2250-569-PL	Purple	57.15	30.48	B30-R10000-WT
∞	B30C-2250-569-RD	Red	57.15	30.48	B30-R10000-WT
∞	B30C-2250-569-SB	Sky Blue	57.15	30.48	B30-R10000
∞	B30C-2250-569-TN	Tan	57.15	30.48	B30-R10000
∞	B30C-2250-569-CL	Transparent	57.15	30.48	B30-R10000
∞	B30C-2250-569-WT	White	57.15	30.48	B30-R10000
∞	B30C-2250-569-YL	Yellow	57.15	30.48	B30-R10000
∞	B30C-3000-569-WT	White	76.20	30.48	B30-R10000
∞	B30C-4000-569-BK	Black	101.60	30.48	B30-R10000-WT
∞	B30C-4000-569-BL	Blue	101.60	30.48	B30-R10000-WT
∞	B30C-4000-569-BR	Brown	101.60	30.48	B30-R10000-WT
∞	B30C-4000-569-GN	Green	101.60	30.48	B30-R10000-WT
∞	B30C-4000-569-GY	Grey	101.60	30.48	B30-R10000
∞	B30C-4000-569-LB	Light Blue	101.60	30.48	B30-R10000
∞	B30C-4000-569-OC	Ochre	101.60	30.48	B30-R60000C, B30-R10000
∞	B30C-4000-569-OR	Orange	101.60	30.48	B30-R10000
∞	B30C-4000-569-PK	Pink	101.60	30.48	B30-R10000
∞	B30C-4000-569-PL	Purple	101.60	30.48	B30-R10000-WT
∞	B30C-4000-569-RD	Red	101.60	30.48	B30-R10000-WT
∞	B30C-4000-569-SB	Sky Blue	101.60	30.48	B30-R10000
∞	B30C-4000-569-TN	Tan	101.60	30.48	B30-R10000
∞	B30C-4000-569-CL	Transparent	101.60	30.48	B30-R10000
∞	B30C-4000-569-WT	White	101.60	30.48	B30-R10000
∞	B30C-4000-569-YL	Yellow	101.60	30.48	B30-R10000



FACILITY & SAFETY IDENTIFICATION




Pre-printed Pre-cut blank sign headers

For creating Arc Flash and safety warning labels in seconds

- ▶ Allows the printer to create multi-colour signs fast - in a single print pass
- ▶ B-595 Indoor/Outdoor grade material conforms to rough, irregular and "difficult to adhere to" surfaces
- ▶ B-483 uses an aggressive adhesive specifically designed for powder coated surfaces

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-483A: Polyester							
⊗	B33-184-483-ANSIWA		76.20	76.20	82.55	500	B30-R6000
⊗	B33-184-483-ANSIDA		76.20	76.20	82.55	500	B30-R6000
⊗	B33-161-483-ANSIDA		101.60	101.60	107.95	370	B30-R6000
⊗	B33-161-483-ANSIWA		101.60	101.60	107.95	370	B30-R6000
B-595: Vinyl							
▲	B30-242-595-BLNKWT		28.58	72.39	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT		57.15	97.79	107.95	250	B30-R10000
▲	B30-241-595-BLNKYL		57.15	76.20	82.55	300	B30-R10000
⊗	B30-241-595-ANSIDA		76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSICA		76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSIWA		76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSINO		76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-OSHACA		76.20	57.15	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT		76.20	57.15	82.55	300	B30-R10000
▲	B30-25-595-BLNKYL		101.60	152.40	158.75	175	B30-R10000
⊗	B30-25-595-ANSIDA		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSICA		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSIWA		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSINO		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-OSHADA		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-OSHACA		152.40	101.60	158.75	175	B30-R10000
▲	B30-25-595-BLNKWT		152.40	101.60	158.75	175	B30-R10000

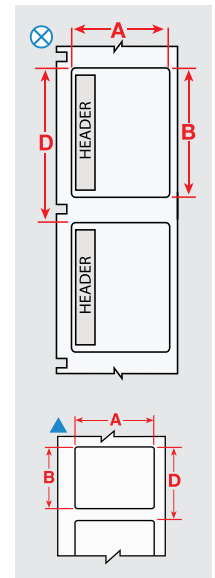

* The text area below the header is yellow. Text area below other signs are white B30-R10000 coloured ribbons can also be used on these parts

B-851 Non-adhesive pre-printed & pre-cut safety tags

Pre-printed and pre-cut to save you time

- ▶ Non-adhesive semi-rigid polyester card stock
- ▶ Tags are pre-cut with hole and chamfered corners
- ▶ Perforated between tags
- ▶ Snap-in plastic grommets available for extra strength around mounting hole. Order reference: 020596


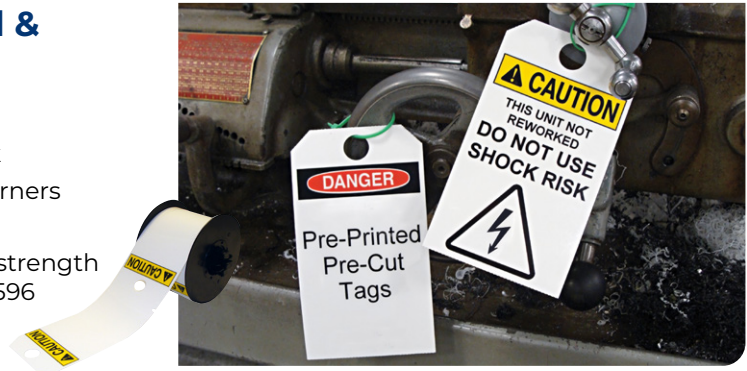


Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-851: Polyester							
	B30-255-851-ANSIDB		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-OSHADB		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-OSHADSF		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-ANSIDF		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-OSHADF		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-ANSIDA		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-OSHADA		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-ANSICA		82.55	146.05	158.75	100	B30-R10000




B-595 Pre-printed right-to-know chemical labels

For quickly creating NFPA and colour bar labels

- ▶ Allows the printer to produce 5 colour chemical labels in a single print pass
- ▶ Indoor/Outdoor grade material withstands exposure to moisture, chemicals and handling



Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
	B30-244-595-CB		57.15	57.15	63.50	365	B30-R10000
	B30-244-595-NFPA		57.15	57.15	63.50	365	B30-R10000
	B30-244-595-HMIG		57.15	57.15	63.50	365	B30-R10000
	B30-246-595-HMIG		76.20	28.58	85.73	300	B30-R10000
	B30-246-595-NFR		76.20	28.58	85.73	300	B30-R10000
	B30-245-595-CB		101.60	57.15	111.13	240	B30-R10000
	B30-245-595-NFPA		101.60	57.15	111.13	240	B30-R10000
	B30-263-595-NFPA		158.75	101.60	158.75	170	B30-R10000



FACILITY & SAFETY IDENTIFICATION




B-7569 Pre-printed CLP/GHS chemical labels

Print 2 colour CLP/GHS labels in one fast print pass

- ▶ Blank labels with pre-printed red diamonds allow printer to produce 2 colour CLP/GHS labels in one print pass
- ▶ 3 sizes of labels, each with 6 diamond layouts that match templates in Workstation software
- ▶ Indoor/outdoor vinyl material withstands exposure to moisture, chemicals and handling

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B30-260-7569-CLP1		84.99	55.00	92.08	340	R10000
▲	B30-260-7569-CLP2		84.99	55.00	92.08	340	R10000
▲	B30-260-7569-CLP3A		84.99	55.00	92.08	340	R10000
▲	B30-260-7569-CLP3B		84.99	55.00	92.08	340	R10000
▲	B30-260-7569-CLP4A		84.99	55.00	92.08	340	R10000
▲	B30-260-7569-CLP4B		84.99	55.00	92.08	340	R10000
▲	B30-261-7569-CLP1		110.00	75.00	117.48	270	R10000
▲	B30-261-7569-CLP2		110.00	75.00	117.48	270	R10000
▲	B30-261-7569-CLP3A		110.00	75.00	117.48	270	R10000
▲	B30-261-7569-CLP3B		110.00	75.00	117.48	270	R10000
▲	B30-261-7569-CLP4A		110.00	75.00	117.48	270	R10000
▲	B30-261-7569-CLP4B		110.00	75.00	117.48	270	R10000
▲	B30-262-7569-CLP1		154.99	104.98	161.93	200	R10000
▲	B30-262-7569-CLP2		154.99	104.98	161.93	200	R10000
▲	B30-262-7569-CLP3A		154.99	104.98	161.93	200	R10000
▲	B30-262-7569-CLP3B		154.99	104.98	161.93	200	R10000
▲	B30-262-7569-CLP4A		154.99	104.98	161.93	200	R10000
▲	B30-262-7569-CLP4B		154.99	104.98	161.93	200	R10000
▲	B30-18-7569-CLP4C		76.20	25.40	32.39	1000	R10000




B-854 and B-855 ToughWash washdown resistant labels

Withstands pressures of high heat, harsh chemicals and numerous washdown cycles

- ▶ Ideal for use in the Food & Beverage industry
- ▶ Legible and long-lasting for even the toughest washdown cycles
- ▶ B-854 offers metal detectable layer to detect foreign debris in food stream



Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-854: Metal Detectable Polyester								
⊗	B30-25-854-WARN		101.60	152.40	-	158.75	100	B30-R6000
⊗	B30-25-854-DANG		101.60	152.40	-	158.75	100	B30-R6000
⊗	B30-25-854-CAUT		101.60	152.40	-	158.75	100	B30-R6000
∞	B30C-4000-854-WT		101.60	-	15.24	-	1	B30-R6000
∞	B30C-4000-854-YL		101.60	-	15.24	-	1	B30-R6000
B-855: Polyester								
⊗	B30-25-855-WARN		101.60	152.40	-	158.75	100	B30-R6000
⊗	B30-25-855-CAUT		101.60	152.40	-	158.75	100	B30-R6000
∞	B30C-1125-855-YL		28.58	-	15.24	-	1	B30-R6000
∞	B30C-1125-855-WT		28.58	-	15.24	-	1	B30-R6000
∞	B30C-2250-855-YL		57.15	-	15.24	-	1	B30-R6000
∞	B30C-2250-855-WT		57.15	-	15.24	-	1	B30-R6000
∞	B30C-4000-855-YL		101.60	-	15.24	-	1	B30-R6000
∞	B30C-4000-855-WT		101.60	-	15.24	-	1	B30-R6000

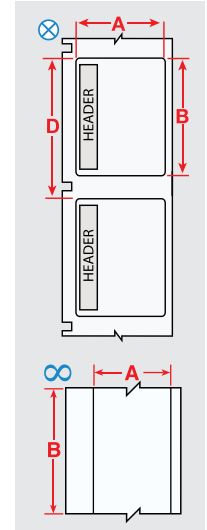


B-595 Printable inspection date labels

Print inspection and date labels when and how you need them

Inspection date labels can be used wherever a frequent and regular inspection of machinery and equipment is required. One example is the indication of the inspection date of fire extinguishers. Print these labels yourself to customise for your specific situation.



Diagram	Order Reference	Colour	Diameter C (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
⊗	B30-D25-595-BL	Blue	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
⊗	B30-D25-595-BR	Brown	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
⊗	B30-D25-595-GN	Green	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
⊗	B30-D25-595-GY	Grey	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
⊗	B30-D25-595-OC	Ochre	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
⊗	B30-D25-595-OR	Orange	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
⊗	B30-D25-595-PL	Purple	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
⊗	B30-D25-595-WT	White	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
⊗	B30-D35-595-BL	Blue	35 mm	38.10	750	B30-R10000, B30-R10000-WT
⊗	B30-D35-595-BR	Brown	35 mm	38.10	750	B30-R10000, B30-R10000-WT
⊗	B30-D35-595-GN	Green	35 mm	38.10	750	B30-R10000, B30-R10000-WT
⊗	B30-D35-595-GY	Grey	35 mm	38.10	750	B30-R10000, B30-R10000-WT
⊗	B30-D35-595-OC	Ochre	35 mm	38.10	750	B30-R10000, B30-R10000-WT
⊗	B30-D35-595-OR	Orange	35 mm	38.10	750	B30-R10000, B30-R10000-WT
⊗	B30-D35-595-PL	Purple	35 mm	38.10	750	B30-R10000, B30-R10000-WT
⊗	B30-D35-595-WT	White	35 mm	38.10	750	B30-R10000, B30-R10000-WT



FACILITY & SAFETY IDENTIFICATION




B-595 and B-7569 Pre-cut Blank labels

For general purpose, peel-off-and-apply identification

- ▶ Ideal for a wide range of labelling applications
- ▶ Includes two sizes that are pre-cut and pre-sized to fit heavy-duty rigid tags
- ▶ Indoor/Outdoor grade material

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl							
▲	B30-242-595-BLNKWT	White	28.58	72.39	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT	White	57.15	97.79	107.95	250	B30-R10000
▲	B30-241-595-BLNKYL	Yellow	57.15	76.20	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT	White	76.20	57.15	82.55	300	B30-R10000
▲	B30-25-595-BLNKYL	Yellow	101.60	152.40	158.75	175	B30-R10000
▲	B30-25-595-BLNKWT	White	152.40	101.60	158.75	175	B30-R10000
B-7569: Vinyl							
▲	B30-242-7569-WT	White	28.58	72.00	82.55	300	B30-R10000
▲	B30-241-7569-WT	White	57.00	75.00	82.55	300	B30-R10000
▲	B30-219-7569-WT	White	57.00	98.00	107.95	250	B30-R10000
▲	B30-241-7569-YL	Yellow	57.00	75.00	82.55	300	B30-R10000
▲	B30-25-7569-WT	White	101.00	152.00	158.75	175	B30-R10000
▲	B30-25-7569-YL	Yellow	101.00	152.00	158.75	175	B30-R10000




B-551 and B-851 Non-adhesive tag stock

For safety, lockout and general purpose hanging tags

- ▶ Non-adhesive, polyester stock
- ▶ Hole punch available separately. Order reference: 020591
- ▶ Optional snap-in grommets available. Order Reference: 020596

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-551: Polyester								
∞	B30C-2500-551-WT	White	63.50	-	15.24	-	1	B30-R10000
∞	B30C-3250-551-WT	White	82.55	-	15.24	-	1	B30-R10000
∞	B30C-4250-551-WT	White	107.19	-	15.24	-	1	B30-R10000
B-851: Polyester								
🔒	B30-255-851-BL	Blue	82.55	146.05	-	158.75	100	B30-R10000
🔒	B30-255-851-GN	Green	82.55	146.05	-	158.75	100	B30-R10000
🔒	B30-255-851-OR	Orange	82.55	146.05	-	158.75	100	B30-R10000
🔒	B30-255-851-RD	Red	82.55	146.05	-	158.75	100	B30-R10000
🔒	B30-255-851-WT	White	82.55	146.05	-	158.75	100	B30-R10000
🔒	B30-255-851-YL	Yellow	82.55	146.05	-	158.75	100	B30-R10000

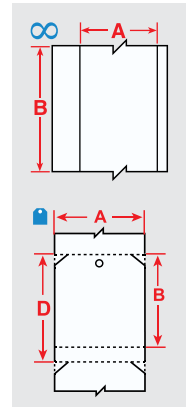

FACILITY & SAFETY IDENTIFICATION


B-584 Retro reflective tape

For Highly reflective identification that shines back brightly when struck by light

- ▶ Ideal for labelling outdoor utility poles and pedestals, jobsite equipment and roof-top equipment
- ▶ Recommended low light or inclement weather conditions



Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-584-OR	Orange	28.58	15.24	B30-R10000
∞	B30C-1125-584-SL	Silver	28.58	15.24	B30-R10000
∞	B30C-1125-584-YL	Yellow	28.58	15.24	B30-R10000
∞	B30C-2250-584-OR	Orange	57.15	15.24	B30-R10000
∞	B30C-2250-584-SL	Silver	57.15	15.24	B30-R10000
∞	B30C-2250-584-YL	Yellow	57.15	15.24	B30-R10000
∞	B30C-4000-584-OR	Orange	101.60	15.24	B30-R10000
∞	B30C-4000-584-SL	Silver	101.60	15.24	B30-R10000
∞	B30C-4000-584-YL	Yellow	101.60	15.24	B30-R10000




B-526 BradyGlo High-intensity photoluminescent tape

For glow-in-the dark identification - Up to 10 hours

- ▶ Designed for directional and evacuation marking
- ▶ Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls



Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-526	Photoluminescent Green	28.58	15.24	B30-R10000
∞	B30C-2250-526	Photoluminescent Green	57.15	15.24	B30-R10000
∞	B30C-4000-526	Photoluminescent Green	101.60	15.24	B30-R10000




B-787 Polyvinyl fluoride tape

Ideal for applications that require self-extinguishing properties.

- ▶ Glossy white topcoated material with permanent acrylic adhesive
- ▶ Meets the colour requirements of FED-STD-595C Colour 17875 White
- ▶ Complies with the requirements of Boeing BMS 10-26 Type I, Grade A



Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-4000-787	White	101.60	18.29	B30-R6000



FACILITY & SAFETY IDENTIFICATION




B-581 Repositionable vinyl

For 5S and lean applications

- ▶ Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- ▶ Ideal for temporary, removable and repositionable labels, like 5S and lean inventory labels
- ▶ Service temp: -40 °C to 82 °C / Application temp: 10 °C to 82 °C

Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-500-581-WT	White	12.70	30.48	B30-R10000
∞	B30C-500-581-YL	Yellow	12.70	30.48	B30-R10000
∞	B30C-1125-581-WT	White	28.58	30.48	B30-R10000
∞	B30C-1125-581-YL	Yellow	28.58	30.48	B30-R10000
∞	B30C-2250-581-WT	White	57.15	30.48	B30-R10000
∞	B30C-2250-581-YL	Yellow	57.15	30.48	B30-R10000
∞	B30C-4000-581-WT	White	101.60	30.48	B30-R10000
∞	B30C-4000-581-YL	Yellow	101.60	30.48	B30-R10000




B-509 Printable magnetic supply

Easiest and quickest material for removing and repositioning

- ▶ Non-adhesive magnetic material that can be printed on directly
- ▶ Ideal for reusable and repositionable identification applications

Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-2500-509-WT	White	63.50	7.62	B30-R10000
∞	B30C-2500-509-YL	Yellow	63.50	7.62	B30-R10000
∞	B30C-4250-509-WT	White	107.95	7.62	B30-R10000
∞	B30C-4250-509-YL	Yellow	107.95	7.62	B30-R10000




B-483 ToughStripe Printable Floor Marking Tape

Ships with B-634 Polyester Overlamine to protect your legend

- ▶ The ultra-aggressive adhesive allows for printable messages to be placed on the floor
- ▶ 3 step process : print the tape, apply it to the floor, apply the overlamine

Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-483BL-KT	Blue	28.58	30.48	B30-R4400-WT
∞	B30C-1125-483GN-KT	Green	28.58	30.48	B30-R4400-WT
∞	B30C-1125-483RD-KT	Red	28.58	30.48	B30-R4400-WT
∞	B30C-1125-483WT-KT	White	28.58	30.48	B30-R6000
∞	B30C-1125-483YL-KT	Yellow	28.58	30.48	B30-R6000
∞	B30C-2250-483BK-KT	Black	57.15	30.48	B30-R4400-WT
∞	B30C-2250-483BL-KT	Blue	57.15	30.48	B30-R4400-WT
∞	B30C-2250-483GN-KT	Green	57.15	30.48	B30-R4400-WT
∞	B30C-2250-483OR-KT	Orange	57.15	30.48	B30-R6000
∞	B30C-2250-483RD-KT	Red	57.15	30.48	B30-R4400-WT
∞	B30C-2250-483WT-KT	White	57.15	30.48	B30-R6000
∞	B30C-2250-483YL-KT	Yellow	57.15	30.48	B30-R6000
∞	B30C-3000-483WT-KT	White	76.20	30.48	B30-R6000
∞	B30C-3000-483YL-KT	Yellow	76.20	30.48	B30-R6000
∞	B30C-4000-483BL-KT	Blue	101.60	30.48	B30-R4400-WT
∞	B30C-4000-483GN-KT	Green	101.60	30.48	B30-R4400-WT
∞	B30C-4000-483OR-KT	Orange	101.60	30.48	B30-R6000
∞	B30C-4000-483RD-KT	Red	101.60	30.48	B30-R4400-WT
∞	B30C-4000-483WT-KT	White	101.60	30.48	B30-R6000
∞	B30C-4000-483YL-KT	Yellow	101.60	30.48	B30-R6000



FACILITY & SAFETY IDENTIFICATION


B-7569 Indoor/Outdoor vinyl

General purpose industrial vinyl for indoor/outdoor usage

- ▶ High gloss, durable and flexible identification material
- ▶ Adheres to difficult low surface energy materials
- ▶ Can handle up to 75°C, which meets industry maintenance temperatures
- ▶ Low-shrink vinyl



Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-500-7569-BK	Black	12.70	30.00	B30-R10000-WT
∞	B30C-500-7569-BL	Blue	12.70	30.00	B30-R10000-WT
∞	B30C-500-7569-GN	Green	12.70	30.00	B30-R10000-WT
∞	B30C-500-7569-OR	Orange	12.70	30.00	B30-R10000
∞	B30C-500-7569-RD	Red	12.70	30.00	B30-R10000-WT
∞	B30C-500-7569-WT	White	12.70	30.00	B30-R10000
∞	B30C-500-7569-YL	Yellow	12.70	30.00	B30-R10000
∞	B30C-1125-7569-BK	Black	29.00	30.00	B30-R10000-WT
∞	B30C-1125-7569-BL	Blue	29.00	30.00	B30-R10000-WT
∞	B30C-1125-7569-GN	Green	29.00	30.00	B30-R10000-WT
∞	B30C-1125-7569-OR	Orange	29.00	30.00	B30-R10000
∞	B30C-1125-7569-RD	Red	29.00	30.00	B30-R10000-WT
∞	B30C-1125-7569-WT	White	29.00	30.00	B30-R10000
∞	B30C-1125-7569-YL	Yellow	29.00	30.00	B30-R10000
∞	B30C-2250-7569-BK	Black	57.00	30.00	B30-R10000-WT
∞	B30C-2250-7569-BL	Blue	57.00	30.00	B30-R10000-WT
∞	B30C-2250-7569-GN	Green	57.00	30.00	B30-R10000-WT
∞	B30C-2250-7569-OR	Orange	57.00	30.00	B30-R10000
∞	B30C-2250-7569-RD	Red	57.00	30.00	B30-R10000-WT
∞	B30C-2250-7569-WT	White	57.00	30.00	B30-R10000
∞	B30C-2250-7569-YL	Yellow	57.00	30.00	B30-R10000
∞	B30C-3000-7569-WT	White	75.00	30.00	B30-R10000
∞	B30C-3000-7569-YL	Yellow	75.00	30.00	B30-R10000
∞	B30C-4000-7569-BK	Black	101.00	30.00	B30-R10000-WT
∞	B30C-4000-7569-BL	Blue	101.00	30.00	B30-R10000-WT
∞	B30C-4000-7569-GN	Green	101.00	30.00	B30-R10000-WT
∞	B30C-4000-7569-OR	Orange	101.00	30.00	B30-R10000
∞	B30C-4000-7569-RD	Red	101.00	30.00	B30-R10000-WT
∞	B30C-4000-7569-WT	White	101.00	30.00	B30-R10000
∞	B30C-4000-7569-YL	Yellow	101.00	30.00	B30-R10000




B-549 Cold temperature application material

For identification in temperature as cold as -40°C

- ▶ Special adhesive permanently adheres to extremely cold surfaces
- ▶ Ideal for cold storage warehouses, fridges, freezers and short-term outdoor use in winter
- ▶ Service temp: -40 °C to 100 °C
- ▶ Application temp: -23 °C to 100 °C



Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-549-WT	White	28.58	30.48	B30-R10000
∞	B30C-1125-549-YL	Yellow	28.58	30.48	B30-R10000
∞	B30C-2250-549-WT	White	57.15	30.48	B30-R10000
∞	B30C-2250-549-YL	Yellow	57.15	30.48	B30-R10000
∞	B30C-4000-549-WT	White	101.60	30.48	B30-R10000
∞	B30C-4000-549-YL	Yellow	101.60	30.48	B30-R10000



ELECTRICAL / DATACOM IDENTIFICATION




B-593 Raised profile labels

Lower cost than engraved legend plates

- ▶ High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.65 mm)
- ▶ Ideal for inside-panel backer board labels and front-of-enclosure labelling
- ▶ On-demand labelling: labels print out in less than 4 seconds
- ▶ No need to abbreviate your text to avoid per character engraving charges
- ▶ 10-year outdoor durability rating
- ▶ 6 colours, 7 rectangular sizes

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B30EP-171-593-BK	Black	26.92	12.45	19.05	500	B30-R4400-WT
▲	B30EP-171-593-GN	Green	26.92	12.45	19.05	500	B30-R4400-WT
▲	B30EP-171-593-RD	Red	26.92	12.45	19.05	500	B30-R4400-WT
▲	B30EP-171-593-SL	Silver	26.92	12.45	19.05	500	B30-R6000
▲	B30EP-171-593-WT	White	26.92	12.45	19.05	500	B30-R6000
▲	B30EP-171-593-YL	Yellow	26.92	12.45	19.05	500	B30-R6000
▲	B30EP-172-593-BK	Black	44.96	15.00	21.59	450	B30-R4400-WT
▲	B30EP-172-593-GN	Green	44.96	15.00	21.59	450	B30-R4400-WT
▲	B30EP-172-593-RD	Red	44.96	15.00	21.59	450	B30-R4400-WT
▲	B30EP-172-593-SL	Silver	44.96	15.00	21.59	450	B30-R6000
▲	B30EP-172-593-WT	White	44.96	15.00	21.59	450	B30-R6000
▲	B30EP-172-593-YL	Yellow	44.96	15.00	21.59	450	B30-R6000
▲	B30EP-173-593-BK	Black	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-GN	Green	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-RD	Red	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-SL	Silver	50.80	25.40	31.75	300	B30-R6000
▲	B30EP-173-593-WT	White	50.80	25.40	31.75	300	B30-R6000
▲	B30EP-173-593-YL	Yellow	50.80	25.40	31.75	300	B30-R6000
▲	B30EP-174-593-BK	Black	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-GN	Green	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-RD	Red	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-SL	Silver	101.60	25.40	28.58	300	B30-R6000
▲	B30EP-174-593-WT	White	101.60	25.40	28.58	300	B30-R6000
▲	B30EP-174-593-YL	Yellow	101.60	25.40	28.58	300	B30-R6000
▲	B30EP-175-593-BK	Black	76.20	19.05	25.40	375	B30-R4400-WT
▲	B30EP-175-593-GN	Green	76.20	19.05	25.40	375	B30-R4400-WT
▲	B30EP-175-593-WT	White	76.20	19.05	25.40	375	B30-R6000
▲	B30EP-175-593-YL	Yellow	76.20	19.05	25.40	375	B30-R6000
▲	B30EP-176-593-BK	Black	76.20	25.40	31.75	300	B30-R4400-WT
▲	B30EP-176-593-GN	Green	76.20	25.40	31.75	300	B30-R4400-WT
▲	B30EP-176-593-WT	White	76.20	25.40	31.75	300	B30-R6000
▲	B30EP-176-593-YL	Yellow	76.20	25.40	31.75	300	B30-R6000
▲	B30EP-177-593-BK	Black	76.20	63.50	69.85	125	B30-R4400-WT
▲	B30EP-177-593-GN	Green	76.20	63.50	69.85	125	B30-R4400-WT
▲	B30EP-177-593-WT	White	76.20	63.50	69.85	125	B30-R6000
▲	B30EP-177-593-YL	Yellow	76.20	63.50	69.85	125	B30-R6000



ELECTRICAL / DATACOM IDENTIFICATION


B-593 Raised profile labels - Push button style

Lower cost than engraved legend plates

- ▶ High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (total thickness = 0.65 mm)
- ▶ High performance, low cost substitute to engraved plates
- ▶ 10 year outdoor durability rating
- ▶ On-demand labelling: labels print out in less than 4 seconds
- ▶ 5 push button sizes (including keyed with 22.50 and 30.50 mm hole diam and non-keyed with 22.50 mm hole diam)



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
	B30EP-167-593-BK	Black	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167-593-GN	Green	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167-593-RD	Red	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167-593-WT	White	30.48	38.10	44.45	200	B30-R6000
	B30EP-167-593-YL	Yellow	30.48	38.10	44.45	200	B30-R6000
	B30EP-167U-593-BK	Black	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167U-593-GN	Green	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167U-593-RD	Red	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167U-593-WT	White	30.48	38.10	44.45	200	B30-R6000
	B30EP-167U-593-YL	Yellow	30.48	38.10	44.45	200	B30-R6000
	B30EP-168-593-BK	Black	30.48	48.26	53.98	180	B30-R4400-WT
	B30EP-168-593-GN	Green	30.48	48.26	53.98	180	B30-R4400-WT
	B30EP-168-593-RD	Red	30.48	48.26	53.98	180	B30-R4400-WT
	B30EP-168-593-WT	White	30.48	48.26	53.98	180	B30-R6000
	B30EP-168-593-YL	Yellow	30.48	48.26	53.98	180	B30-R6000
	B30EP-169-593-BK	Black	45.72	45.72	50.80	190	B30-R4400-WT
	B30EP-169-593-GN	Green	45.72	45.72	50.80	190	B30-R4400-WT
	B30EP-169-593-RD	Red	45.72	45.72	50.80	190	B30-R4400-WT
	B30EP-169-593-WT	White	45.72	45.72	50.80	190	B30-R6000
	B30EP-169-593-YL	Yellow	45.72	45.72	50.80	190	B30-R6000
	B30EP-170-593-BK	Black	60.96	60.96	66.68	145	B30-R4400-WT
	B30EP-170-593-GN	Green	60.96	60.96	66.68	145	B30-R4400-WT
	B30EP-170-593-RD	Red	60.96	60.96	66.68	145	B30-R4400-WT
	B30EP-170-593-WT	White	60.96	60.96	66.68	145	B30-R6000
	B30EP-170-593-YL	Yellow	60.96	60.96	66.68	145	B30-R6000

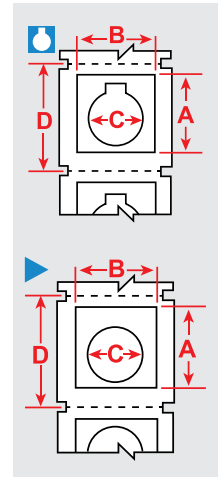

B-498 Adhesive terminal block markers

Holds strong but can be removed cleanly and re-applied

- ▶ Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- ▶ Highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and re-application


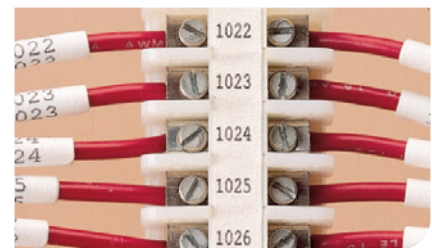


Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
	B33C-312-498	White	7.92	25.91 m	B30-R6200
	B33C-375-498	White	9.53	25.91 m	B30-R6200



ELECTRICAL / DATACOM IDENTIFICATION




Inside-panel component labels

For automation & electrical panels and enclosures

- ▶ Various sizes in several durable material types
- ▶ Ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components
- ▶ All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-422: Polyester										
∞	B33C-375-422	White	9.53	–	–	25.91	–	1	1	B30-R6000
B-483A: Polyester										
●	B33-149-483	White	12.70	12.70	–	–	15.24	5000	4	B30-R6000
●	B33-5-483	White	25.40	12.70	–	–	15.24	5000	3	B30-R6000
▲	B33-17-483	White	50.80	25.40	–	–	28.58	1500	1	B30-R6000
▲	B33-7-483	White	69.85	31.75	–	–	34.93	1000	1	B30-R6000
▲	B33-19-483	White	76.20	50.80	–	–	53.98	500	1	B30-R6000
▲	B33-18-483	White	76.20	25.40	–	–	28.58	1500	1	B30-R6000
▲	B33-55-483	White	101.60	50.80	–	–	53.98	750	1	B30-R6000
▲	B33-76-483	White	101.60	76.20	–	–	79.38	500	1	B30-R6000
B-484A: Polyester										
▲	B33-125-484	White	22.86	12.70	–	–	15.24	1500	1	B30-R6000
●	B33-5-484	White	25.40	12.70	–	–	15.24	5000	3	B30-R6000
▲	B33-136-484	White	38.10	19.05	–	–	22.23	1500	1	B30-R6000
▲	B33-17-484	White	50.80	25.40	–	–	28.58	1500	1	B30-R6000
▲	B33-18-484	White	76.20	25.40	–	–	28.58	1500	1	B30-R6000
▲	B33-19-484	White	76.20	50.80	–	–	53.98	500	1	B30-R6000
▲	B33-55-484	White	101.60	50.80	–	–	53.98	750	1	B30-R6000
▲	B33-161-484	White	101.60	101.60	–	–	104.78	350	1	B30-R6000
B-498: Vinyl Cloth										
●	B33-90-498	White	6.35	36.50	–	–	39.70	2500	6	B30-R6200
●	B33-87-498	White	12.70	36.50	–	–	39.70	2500	6	B30-R6200
●	B33-68-498	White	12.70	19.05	–	–	21.59	5000	4	B30-R6200
●	B33-1-498	White	19.05	6.35	–	–	8.89	5000	4	B30-R6200
▲	B33-254-498	White	19.05	19.05	–	–	21.59	1000	1	B30-R6200
●	B33-95-498	White	20.32	36.50	–	–	39.70	2300	3	B30-R6200
●	B33-88-498	White	25.40	19.05	–	–	22.23	2500	2	B30-R6200
●	B33-5-498	White	25.40	12.70	–	–	15.24	5000	3	B30-R6200
●	B33-89-498	White	25.40	36.50	–	–	39.70	2300	3	B30-R6200
●	B33-325-498	White	25.40	63.50	–	–	66.68	700	2	B30-R6200
●	B33-326-498	White	25.40	101.60	–	–	104.78	450	2	B30-R6200
●	B33-327-498	White	38.10	101.60	–	–	104.78	450	2	B30-R6200
●	B33-328-498	White	38.10	152.40	–	–	155.58	300	2	B30-R6200
B-499: Nylon Cloth										
●	B33-68-499	White	12.70	19.05	–	–	21.59	1500	4	B30-R4300
●	B33-165-499	White	20.32	36.50	–	–	39.70	2500	4	B30-R4300
▲	B33-125-499	White	22.86	12.70	–	–	15.24	1500	1	B30-R4300
●	B33-152-499	White	25.40	9.53	–	–	12.07	1500	2	B30-R4300
▲	B33-136-499	White	38.10	19.05	–	–	22.23	1500	1	B30-R4300
▲	B33-151-499	White	50.80	6.35	–	–	8.89	1500	1	B30-R4300
▲	B33-137-499	White	50.80	25.40	–	–	28.58	1100	1	B30-R4300
/	B33-143-499	White	–	–	9.53	–	12.70	1500	4	B30-R4300
/	B33-144-499	White	–	–	12.70	–	15.88	1500	3	B30-R4300
/	B33-602-499	White	–	–	9.53	–	16.50	3000	3	B30-R6000
/	B33-603-499	White	–	–	12.70	–	15.70	3000	3	B30-R6000
/	B33-602-499YL	Yellow	–	–	9.53	–	16.50	3000	3	B30-R6000
/	B33-603-499YL	Yellow	–	–	12.70	–	15.70	3000	3	B30-R6000
B-595: Vinyl										
∞	B30C-500-595-WT	White	12.70	–	–	30.48	–	1	1	B30-R10000
∞	B30C-500-595-YL	Yellow	12.70	–	–	30.48	–	1	1	B30-R10000

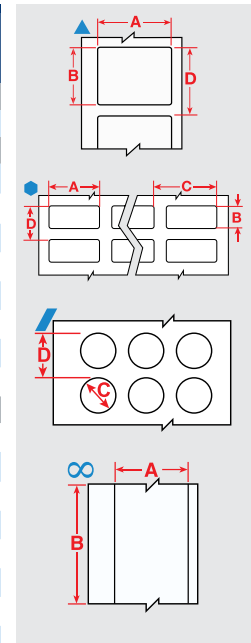


Self-laminating wire & cable markers

Brady's most popular wire marker

- ▶ Features white printable area with clear "tail" that wraps around marker to protect text
- ▶ Superior resistance to abrasion, handling, solvents, water, oil and dirt
- ▶ B-427 uses a permanent acrylic adhesive designed specifically for tightly curved surfaces
- ▶ B-417 offers an extra-strong permanent acrylic adhesive ideal for small-gauge wires



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-417: Self-laminating Vinyl										
◆	B33-80-417	White	12.70	19.05	9.53	2.54 - 3.05	24.13	2500	4	B30-R4300
◆	B33-114-417	White	12.70	31.75	12.70	3.05 - 6.10	34.93	4000	4	B30-R4300
◆	B33-8-417	White	12.70	36.50	12.70	3.81 - 8.38	41.28	5000	5	B30-R4300
◆	B33-56-417	White	19.05	23.80	9.53	2.29 - 4.57	28.58	5000	4	B30-R4300
◆	B33-73-417	White	19.05	44.45	12.70	5.59 - 11.43	47.63	3500	4	B30-R4300
◆	B33-116-417	White	25.40	25.40	9.53	2.54 - 5.08	28.58	2500	2	B30-R4300
◆	B33-117-417	White	25.40	31.75	12.70	3.05 - 6.10	34.93	2000	2	B30-R4300
◆	B33-9-417	White	25.40	36.50	12.70	3.81 - 7.62	41.28	2500	3	B30-R4300
◆	B33-75-417	White	25.40	57.15	19.05	6.60 - 12.45	60.33	1400	2	B30-R4300
◆	B33-10-417	White	25.40	95.25	25.40	11.18 - 22.35	101.60	1200	3	B30-R4300
◆	B33-81-417	White	25.40	152.40	38.10	18.29 - 36.32	157.15	500	2	B30-R4300
▷	B33-119-417	White	38.10	38.10	12.70	3.81 - 8.38	41.28	1000	1	B30-R4300
▷	B33-27-417	White	50.80	95.25	25.40	11.43 - 16.15	101.60	400	1	B30-R4300
▷	B33-26-417	White	63.50	57.15	19.05	6.10 - 12.19	61.93	500	1	B30-R4300
B-427: Self-laminating Vinyl										
◆	B33-8-427	White	12.70	36.50	12.70	3.81 - 7.62	41.30	5000	5	B30-R4300
◆	B33-80-427	White	12.70	19.05	9.53	2.54 - 3.05	24.13	2500	4	B30-R4300
◆	B33-113-427	White	12.70	25.40	9.53	2.54 - 5.08	28.58	2500	4	B30-R4300
◆	B33-114-427	White	12.70	31.75	12.70	3.81 - 6.10	34.93	4000	4	B30-R4300
◆	B33-73-427	White	19.05	44.45	12.70	5.08 - 10.16	47.60	3500	4	B30-R4300
◆	B33-56-427	White	19.05	23.80	9.53	2.29 - 4.57	28.58	5000	4	B30-R4300
◆	B33-74-427	White	20.32	36.50	12.70	3.81 - 7.62	41.30	4000	4	B30-R4300
◆	B33-115-427	White	25.40	19.05	9.53	2.54 - 3.05	21.59	2500	2	B30-R4300
▷	B33-131-427	White	25.40	66.68	25.40	6.60 - 13.21	28.58	1500	1	B30-R4300
◆	B33-9-427	White	25.40	36.50	12.70	3.81 - 7.62	41.30	2500	3	B30-R4300
◆	B33-81-427	White	25.40	152.40	38.10	18.29 - 36.32	157.10	500	2	B30-R4300
◆	B33-75-427	White	25.40	57.15	19.05	6.10 - 12.19	60.30	1400	2	B30-R4300
◆	B33-10-427	White	25.40	95.25	25.40	11.18 - 22.35	101.60	1200	3	B30-R4300
◆	B33-116-427	White	25.40	25.40	9.53	2.54 - 5.08	28.58	2500	2	B30-R4300
◆	B33-117-427	White	25.40	31.75	12.70	3.05 - 6.10	34.93	2000	2	B30-R4300
◆	B33-211-427	White	25.40	25.40	9.65	2.70 - 5.10	32.13	3000	3	B30-R4300
◆	B33-311-427	White	25.40	31.75	12.70	3.40 - 6.10	37.72	3000	3	B30-R4300
◆	B33-511-427	White	25.40	63.50	19.05	6.70 - 14.20	70.64	1500	3	B30-R4300
▷	B33-272-427	White	38.10	57.15	19.05	6.10 - 12.19	63.50	700	1	B30-R4300
▷	B33-119-427	White	38.10	38.10	12.70	4.06 - 8.13	44.45	1000	1	B30-R4300
▲	B33-135-427AW*	White	38.10	19.05	19.05	-	22.23	1500	1	B30-R4300
▷	B33-118-427	White	38.10	25.40	9.53	2.54 - 5.08	28.58	1250	1	B30-R4300
◆	B33-517-427	White	38.10	63.50	19.05	6.70 - 14.20	69.85	1000	2	B30-R4300
▷	B33-273-427	White	44.45	57.15	19.05	6.10 - 12.19	63.50	500	1	B30-R4300
▷	B33-121-427	White	44.45	38.10	12.70	4.06 - 8.13	44.45	1000	1	B30-R4300
▷	B33-120-427	White	44.45	25.40	9.53	2.69 - 5.11	28.58	1250	1	B30-R4300
▷	B33-82-427	White	50.80	152.40	38.10	18.29 - 36.32	157.15	200	1	B30-R4300
▲	B33-137-427AW*	White	50.80	25.40	25.40	-	28.58	1500	1	B30-R4300
▷	B33-27-427	White	50.80	95.25	25.40	11.18 - 22.35	101.60	400	1	B30-R4300
▲	B33-640-427AW*	White	55.88	38.10	-	-	45.08	1500	1	B30-R4300
▷	B33-26-427	White	63.50	57.15	19.05	6.10 - 12.19	61.90	500	1	B30-R4300
▲	B33-648-427AW*	White	66.68	25.40	-	-	32.38	1500	1	B30-R4300

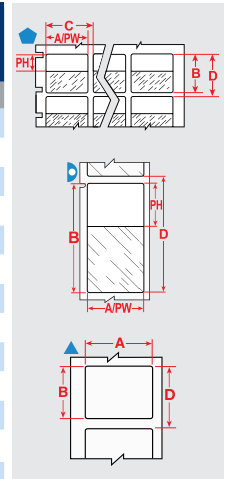

*AW = All white / no transparent area

ELECTRICAL / DATACOM IDENTIFICATION





B-427 rotating self-laminating labels

Legible from any angle: identify cables faster

- ▶ The B-427 self-laminating Rotating Label version can increase the speed of cable identification because its print can be read from any angle.
- ▶ The label can be rotated around a cable thanks to a non-adhesive printable zone and a translucent, self-adhesive laminate that is wrapped around a cable.

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
	B33R0-292-427	White	12.70	44.45	17.78	2.69 - 5.66	65.41	1500	3	B30-R4300
	B33R0-293-427	White	12.70	69.85	27.94	3.99 - 8.89	100.97	900	3	B30-R4300
	B33R0-294-427	White	25.40	44.45	17.78	2.69 - 5.66	65.41	1000	2	B30-R4300
	B33R0-295-427	White	25.40	69.85	27.94	3.99 - 8.89	100.97	700	2	B30-R4300
	B33R0-296-427	White	25.40	79.38	31.75	4.39 - 10.11	114.30	600	2	B30-R4300
	B33R0-297-427	White	25.40	30.48	12.70	2.01 - 4.04	46.36	600	2	B30-R4300
	B33R0-299-427	White	50.80	79.38	31.75	4.39 - 10.11	114.30	250	1	B30-R4300

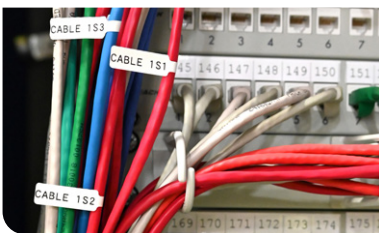


B-425 Fibre optic labels

Ideal for marking fibre optic cables

- ▶ Allows you to handle and view labels without touching the wires.

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Max. Wire Diameter (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
	B33FP-01-425	White	30.00	20.00	5.40	26.03	1000	1	B30-R4300
	B33FT-01-425	White	30.00	20.00	5.40	46.03	1000	2	B30-R4300




B-483 QuickFlag tapered wire and cable flags

One-sided labels

- ▶ Quickly flag wires and cables with the B-483 QuickFlag™ label material, featuring a tapered design to prevent mismatched edges and make flag installation much faster.

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Printable Area Width PW (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
	B33-360-483	White	25.40	50.80	25.40	25.40	57.20	1500	2	B30-R6000
	B33-361-483	White	48.26	50.80	25.40	48.26	57.20	1500	2	B30-R6000




ELECTRICAL / DATACOM IDENTIFICATION

B-498 Repositionable vinyl cloth wire & cable markers

Holds strong but can be removed cleanly and re-applied

- ▶ Vinyl cloth label for marking wires, cables and inside-panel components
- ▶ Highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and re-application
- ▶ Ideal choice for marking both ends of a wire that you may need to cut shorted before final termination


Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
●	B33-87-498	White	12.70	36.50	4.57 - 11.68	39.70	2500	6	B30-R6200
●	B33-68-498	White	12.70	19.05	2.54 - 6.10	21.59	5000	4	B30-R6200
●	B33-1-498	White	19.05	6.35	0.76 - 2.03	8.89	5000	4	B30-R6200
●	B33-91-498	White	19.05	23.80	3.05 - 7.62	27.00	2500	4	B30-R6200
▲	B33-254-498	White	19.05	19.05	2.54 - 6.10	21.59	1000	1	B30-R6200
●	B33-95-498	White	20.32	36.50	4.57 - 11.68	39.70	2300	3	B30-R6200
●	B33-88-498	White	25.40	19.05	2.54 - 6.10	22.23	2500	2	B30-R6200
●	B33-5-498	White	25.40	12.70	1.52 - 4.06	15.24	5000	3	B30-R6200
●	B33-89-498	White	25.40	36.50	4.57 - 11.68	39.70	2300	3	B30-R6200
●	B33-325-498	White	25.40	63.50	–	66.68	700	2	B30-R6200
●	B33-326-498	White	25.40	101.60	–	104.78	450	2	B30-R6200
●	B33-327-498	White	38.10	101.60	–	104.78	450	2	B30-R6200
●	B33-90-498	White	6.35	36.50	4.57 - 11.68	39.70	2500	6	B30-R6200



B-499 Wire & cable markers

This nylon cloth material has superb adhesive power, making it a flexible all surfaces solution

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
●	B33-87-499	White	12.70	36.50	39.67	2500	6	B30-R6000
●	B33-611-499	White	12.70	25.40	28.40	3000	3	B30-R6000
▲	B33-620-499	White	12.70	25.40	28.40	1000	1	B30-R6000
●	B33-1-499	White	19.05	6.35	8.89	10000	4	B30-R6000
▲	B33-254-499	White	19.05	19.05	21.59	1000	1	B30-R6000
●	B33-91-499	White	19.05	23.80	26.97	2500	4	B30-R6000
▲	B33-125-499	White	22.86	12.70	15.24	1500	1	B30-R4300
●	B33-152-499	White	25.40	9.53	12.07	1500	2	B30-R4300
●	B33-5-499	White	25.40	12.70	15.24	5000	3	B30-R6000
●	B33-88-499	White	25.40	19.05	22.23	2500	2	B30-R6000
●	B33-89-499	White	25.40	36.50	39.67	2300	3	B30-R6000
●	B33-325-499	White	25.40	63.50	66.68	700	2	B30-R6000
●	B33-326-499	White	25.40	101.60	104.78	450	2	B30-R6000
●	B33-621-499	White	25.40	36.50	39.50	3000	3	B30-R6000
●	B33-625-499	White	25.40	66.68	69.68	1500	3	B30-R6000
▲	B33-659-499	White	25.40	12.45	15.40	1000	1	B30-R6000
●	B33-328-498	White	38.10	152.40	155.58	300	2	B30-R6200
●	B33-327-499	White	38.10	101.60	104.78	450	2	B30-R6000
●	B33-328-499	White	38.10	152.40	155.58	300	2	B30-R6000
▲	B33-151-499	White	50.80	6.35	8.89	1500	1	B30-R4300
●	B33-90-499	White	6.35	36.50	39.67	2500	6	B30-R6000



ELECTRICAL / DATACOM IDENTIFICATION




B-437 Tedlar adhesive wire & cable labels

Topcoated Polyvinylfluoride label for wire & cable marking where high temperature and self-extinguishing features are required

- ▶ Heavy duty performance with excellent resistance to water, oil and other fluids
- ▶ Meets MIL-M-87958 Standard

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
●	B33-11-437	White	6.35	6.35	-	0.76 - 2.03	9.53	15000	12	B30-R4300
●	B33-1-437	White	19.05	6.35	-	0.76 - 2.03	8.89	5000	4	B30-R4300
●	B33-5-437	White	25.40	12.70	-	1.52 - 4.06	15.19	5000	3	B30-R4300
●	B33-5-437YL	Yellow	25.40	12.70	-	1.52 - 4.06	15.19	5000	3	B30-R4300
●	B33-29-437	White	31.75	9.53	-	1.27 - 3.05	12.07	5000	2	B30-R4300
●	B33-29-437YL	Yellow	31.75	9.53	-	1.27 - 3.05	12.07	5000	2	B30-R4300
∞	B33C-1000-437	White	25.40	-	25.91	-	-	1	1	B30-R4300
∞	B33C-1000-437YL	Yellow	25.40	-	25.91	-	-	1	1	B30-R4300
∞	B33C-1500-437	White	38.10	-	25.91	-	-	1	1	B30-R4300
∞	B33C-2000-437	White	50.80	-	25.91	-	-	1	1	B30-R4300
∞	B33C-2000-437YL	Yellow	50.80	-	25.91	-	-	1	1	B30-R4300
∞	B33C-3000-437	White	76.20	-	25.91	-	-	1	1	B30-R4300
∞	B30C-4000-437	White	101.60	-	45.72	-	-	1	1	B30-R4300




B-472 Polyimide high temp adhesive wire & cable labels

Topcoated Polyimide label for wire & cable marking where high temperature and self-extinguishing features are required

- ▶ Heavy duty performance with excellent resistance to water, oil and other fluids

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
●	B33-11-472	White	6.35	6.35	-	9.53	15000	12	B30-R4300
●	B33-1-472	White	19.05	6.35	-	8.89	5000	4	B30-R4300
●	B33-2-472	White	22.86	6.35	-	8.89	5000	3	B30-R4300
●	B33-5-472	White	25.40	12.70	-	15.24	5000	3	B30-R4300
●	B33-5-472-YL	Yellow	25.40	12.70	-	15.24	5000	3	B30-R4300
●	B33-29-472	White	31.75	9.53	-	12.07	5000	2	B30-R4300
∞	B33C-1000-472	White	25.40	-	25.91	-	1	1	B30-R4300
∞	B33C-1000-472YL	Yellow	25.40	-	25.91	-	1	1	B30-R4300
∞	B33C-1500-472	White	38.10	-	25.91	-	1	1	B30-R4300
∞	B33C-1500-472YL	Yellow	38.10	-	25.91	-	1	1	B30-R4300
∞	B33C-2000-472	White	50.80	-	25.91	-	1	1	B30-R4300
∞	B33C-2000-472YL	Yellow	50.80	-	25.91	-	1	1	B30-R4300
∞	B33C-3000-472	White	76.20	-	25.91	-	1	1	B30-R4300
∞	B33C-3000-472YL	Yellow	76.20	-	25.91	-	1	1	B30-R4300



ELECTRICAL / DATACOM IDENTIFICATION


B-7599 Polyethylene tag

Rapido Wire Marking Tags

- Simply squeeze the edges of the material together, thread your wire through the holes and pull away the wire to release the marker.



Diagram	Order Reference	Colour	Tag Width A (mm)	Tag Height B (mm)	Hole Diameter C (mm)	Vertical Repeat D (mm)	Tags per Roll	Printer Ribbon Series
	B33R-01-7599-YL	Yellow	23.00	5.20	3.90 x 2.40	8.39	2500	B30-R4300, B30-R6200
	B33R-02-7599-YL	Yellow	23.00	5.20	4.90 x 3.50	8.39	2500	B30-R4300, B30-R6200
	B33R-03-7599-YL	Yellow	25.00	5.70	5.90 x 4.20	8.89	2500	B30-R4300, B30-R6200




B-7597 Tear resistant tags

This tag can be used for a variety of applications including identification of multi-conductor cables, inventory and equipment



Diagram	Order Reference	Colour	Tag Width A (mm)	Tag Height B (mm)	Vertical Repeat D (mm)	Tags per Roll	Printer Ribbon Series
	B33-7597W-2050	White	50.80	12.70	16.72	2000	B30-R4300




B-348 Mass transit cable tag

Fully compliant mass transit tag

- Complies with minimal smoke and halogen emission requirements of the most strict underground norms for High Performance vehicles.
- This tag has excellent UV resistancy.



Diagram	Order Reference	Colour	Tag Width A (mm)	Tag Height B (mm)	Vertical Repeat D (mm)	Tags per Roll	Printer Ribbon Series
	B33-6010-348-WT	White	60.00	10.00	15.08	750	B30-R6000
	B33-6010-348-YL	Yellow	60.00	10.00	15.08	750	B30-R6000
	B33-7510-348-WT	White	75.00	10.00	15.08	750	B30-R6000
	B33-7510-348-YL	Yellow	75.00	10.00	15.08	750	B30-R6000
	B33-7515-348-WT	White	75.00	15.00	20.02	500	B30-R6000
	B33-7515-348-YL	Yellow	75.00	15.00	20.02	500	B30-R6000
	B33-7525-348-WT	White	75.00	25.00	30.16	250	B30-R6000
	B33-7525-348-YL	Yellow	75.00	25.00	30.16	250	B30-R6000



ELECTRICAL / DATACOM IDENTIFICATION




B-7598 Polyester cable tag

Durable outdoor cable identification

- ▶ The B-7598 polyester cable identification tag has been developed to keep cables identified in outdoor environments.
- ▶ Offers up to 10 year outdoor legibility and durability.
- ▶ Available in 7 colours.

Diagram	Order Reference	Colour	Tag Width A (mm)	Tag Height B (mm)	Vertical Repeat D (mm)	Tags per Roll	Printer Ribbon Series
	B33-60x10-7598-BK	Black	60.00	10.00	15.08	1000	B30-R4400-WT
	B33-60x10-7598-BL	Blue	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-GN	Green	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-RD	Red	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-SV	Silver	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-WT	White	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-YL	Yellow	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7643-WT	White	60.00	10.00	15.08	750	B30-R6000
	B33-75x10-7598-BK	Black	75.00	10.00	15.08	1000	B30-R4400-WT
	B33-75x10-7598-BL	Blue	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-GN	Green	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-RD	Red	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-SV	Silver	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-WT	White	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-YL	Yellow	75.00	10.00	15.08	1000	B30-R6000
	B33-75x15-7598-BK	Black	75.00	15.00	20.02	1000	B30-R4400-WT
	B33-75x15-7598-BL	Blue	75.00	15.00	20.02	1000	B30-R6000
	B33-75x15-7598-GN	Green	75.00	15.00	20.02	1000	B30-R6000
	B33-75x15-7598-RD	Red	75.00	15.00	20.02	1000	B30-R6000
	B33-75x15-7598-WT	White	75.00	15.00	20.02	1000	B30-R6000
	B33-75x15-7598-YL	Yellow	75.00	15.00	20.02	1000	B30-R6000
	B33-75x25-7598-BK	Black	75.00	25.00	30.16	500	B30-R4400-WT
	B33-75x25-7598-GN	Green	75.00	25.00	30.16	500	B30-R6000
	B33-75x25-7598-RD	Red	75.00	25.00	30.16	500	B30-R6000
	B33-75x25-7598-WT	White	75.00	25.00	30.16	500	B30-R6000
	B33-75x25-7598-YL	Yellow	75.00	25.00	30.16	500	B30-R6000



ELECTRICAL / DATACOM IDENTIFICATION




B-7643 Halogen-free cable tag

Easily print cable tags wherever you are

- The high performance B-7643 halogen free and non-adhesive cable tag is a cost-efficient, practical solution to identify thick cables and cable bundles in aggressive environments.

Diagram	Order Reference	Colour	Tag Width A (mm)	Tag Height B (mm)	Vertical Repeat D (mm)	Tags per Roll	Printer Ribbon Series
	B33-60x10-7643-BK	Black	60.00	10.00	15.08	750	B30-R4400-WT
	B33-60x10-7643-BL	Blue	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-GN	Green	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-OR	Orange	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-RD	Red	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-YL	Yellow	60.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-BK	Black	75.00	10.00	15.08	750	B30-R4400-WT
	B33-75x10-7643-BL	Blue	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-GN	Green	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-OR	Orange	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-RD	Red	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-WT	White	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-YL	Yellow	75.00	10.00	15.08	750	B30-R6000
	B33-75x15-7643-BK	Black	75.00	15.00	20.02	500	B30-R4400-WT
	B33-75x15-7643-BL	Blue	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-GN	Green	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-OR	Orange	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-RD	Red	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-WT	White	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-YL	Yellow	75.00	15.00	20.02	500	B30-R6000
	B33-75x25-7643-BK	Black	75.00	25.00	30.16	250	B30-R4400-WT
	B33-75x25-7643-BL	Blue	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-GN	Green	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-OR	Orange	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-RD	Red	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-WT	White	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-YL	Yellow	75.00	25.00	30.16	250	B30-R6000



ELECTRICAL / DATACOM IDENTIFICATION

How to select a wire marking sleeve

There are four main questions to ask yourself when you're starting the process of marking wires. These questions will help you select a wire marking sleeve that best suits your needs.

1. Are you marking the wire after termination?

Sleeve markers can only be used before termination because they must be slipped over the open end of the wire. These non-adhesive markers provide flexibility as they can be moved prior to being heat-shrunk. Once shrunk, these markers fit snugly around wires for permanent identification which will stand up to harsh environments.

2. What size of wire are you marking?

The diameter of the wire determines the size of the sleeve or the height of the label to be used.

3. Will you print your own markers or purchase preprinted ones?

Pre-printed markers are available in a large variety of stock legends, and custom legends are available for any large jobs. These markers come in a variety of packaging and formats for ease of use and ease of transport. They are ideal for any application. Printable markers are meant to be printed with variable legends as needed. Various methods for this include: portable wire marking printers or computer software linked to thermal transfer, dot matrix or laser-printers. An extensive array of sizes are available for every application. These printable markers offer the flexibility of printing legends on demand. They are also ideal for applications that require long legends.

4. In what type of environment will these wire markers be placed?

It is extremely important to select a wire marker material that will last for your application. Too many companies go to the trouble of marking only to have to do it all again because they did not select the correct material. Be sure to ask yourself these questions before you select your wire marker.

How to select a marker size

View the chart listed below to assist you in choosing the minimum recommended flattened sleeve height for the wire or cable that you are identifying.

Sleeve code	Flattened Sleeve Height (mm)	Max. Wire/Cable Diameter (mm)	Min. Wire/Cable Diameter (mm)
B-342			
094	4.62	2.03	0.58
1000	42.16	24.13	9.53
125	5.97	2.79	1.17
1500	61.80	36.83	12.70
187	8.51	3.81	1.57
250	11.15	5.46	2.39
375	16.38	8.13	3.18
500	21.62	11.43	4.75
750	31.75	17.78	6.35
B-345			
094	4.62	2.03	0.80
1000	42.16	24.13	11.40
125	5.97	2.79	1.57
1500	61.80	36.83	19.05
187	8.51	3.81	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.75
500	21.62	11.43	6.35
750	31.75	17.78	9.53
B-7641			
094	4.62	2.03	1.19
1000	42.16	24.13	12.70
125	5.97	2.79	1.57
1500	61.80	36.83	19.05
187	8.51	3.81	2.39
2000	80.39	49.53	25.40
250	11.15	5.46	3.18
375	16.38	8.13	4.78
500	21.62	11.43	6.35
750	31.75	17.78	9.53
B-7642			
094	4.62	2.03	1.19
1000	42.16	24.13	12.70
125	5.97	2.79	1.57
1500	61.80	36.83	19.05
187	8.51	3.81	2.39
2000	80.39	49.53	25.40
250	11.15	5.46	3.18
375	16.38	8.13	4.78
500	21.62	11.43	6.35
750	31.75	17.78	9.53

How to read your PermaSleeve order reference

Example order reference: B33D - 187 - 2 - BK - 4

Product Diameter Width Colour Pieces

Order reference components PermaSleeve wire marking sleeves:

Product type	
B33 = Single-sided Printing	B33D = Double-sided Printing

Sleeve diameter
094 = 3/32" size fits wire diameter 0.58mm - 2.03mm
125 = 1/8" size fits wire diameter 1.17mm - 2.79mm
187 = 3/16" size fits wire diameter 1.57mm - 3.81mm
250 = 1/4" size fits wire diameter 2.39mm - 5.46mm
375 = 3/8" size fits wire diameter 3.18mm - 8.13mm
500 = 1/2" size fits wire diameter 4.75mm - 11.43mm
750 = 3/4" size fits wire diameter 6.35mm - 17.78mm
1000 = 1" size fits wire diameter 9.53mm - 24.13mm
1500 = 1 1/2" size fits wire diameter 12.7mm - 36.83mm

Sleeve width
2 = 50.80mm

Sleeve Colour
BK = Black WT = White YL = Yellow

Optional: Pieces Per Sleeve

While 1 marker per sleeve is standard, the sleeve can be split into multiple pieces. Example: B33-1500-2-342-2 This "2" means that this 50.80mm sleeve is slit into two 25.40mm pieces

B-342 PermaSleeve PS polyolefin wire marking sleeves

Standard military/industrial grade. 3:1 Shrink ratio

- ▶ A 3:1 heat shrinkable wire marker sleeve that fits snugly around wires
- ▶ Can be used for identification or wire protection
- ▶ Fade-resistant and flame-retardant




Diagram	Order Reference	Colour	Sleeve Width A (mm)	Sleeve Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Sleeves per Roll	Printer Ribbon Series
V	B33-94-2-342-2	White	25.40	4.62	0.58 - 2.03	12.70	2000	B30-R4300
V	B33-94-2-342YL-2	Yellow	25.40	4.62	0.58 - 2.03	12.70	2000	B30-R4300
V	B33-125-2-342-2	White	25.40	5.97	1.17 - 2.79	12.70	2000	B30-R4300
V	B33-125-2-342YL-2	Yellow	25.40	5.97	1.17 - 2.79	12.70	2000	B30-R4300
V	B33-187-2-342-2	White	25.40	8.51	1.57 - 3.81	15.88	1500	B30-R4300
V	B33-250-2-342-2	White	25.40	11.15	2.39 - 5.46	19.05	1000	B30-R4300
V	B33-375-2-342-2	White	25.40	16.38	3.18 - 8.13	25.40	1000	B30-R4300
V	B33-500-2-342-2	White	25.40	21.62	4.75 - 11.43	31.75	700	B30-R4300
V	B33-500-2-342YL-2	Yellow	25.40	21.62	4.75 - 11.43	31.75	700	B30-R4300
V	B33-1500-2-342YL-2	Yellow	25.40	61.80	12.70 - 36.83	76.20	300	B30-R4300
V	B33D-94-2-342BK	Black	50.80	4.62	0.58 - 2.03	12.70	1000	B30-R4500-SV
V	B33-94-2-342	White	50.80	4.62	0.58 - 2.03	12.70	1000	B30-R4300
V	B33D-94-2-342	White	50.80	4.62	0.58 - 2.03	12.70	1000	B30-R4300
V	B33-94-2-342YL	Yellow	50.80	4.62	0.58 - 2.03	12.70	1000	B30-R4300
V	B33D-94-2-342YL	Yellow	50.80	4.62	0.58 - 2.03	12.70	1000	B30-R4300
V	B33D-125-2-342BK	Black	50.80	5.97	1.17 - 2.79	12.70	1000	B30-R6700
V	B33D-125-2-342	White	50.80	5.97	1.17 - 2.79	12.70	1000	B30-R4300
V	B33-125-2-342	White	50.80	5.97	1.17 - 2.79	12.70	1000	B30-R4300
V	B33D-125-2-342YL	Yellow	50.80	5.97	1.17 - 2.79	12.70	1000	B30-R4300
V	B33-125-2-342YL	Yellow	50.80	5.97	1.17 - 2.79	12.70	1000	B30-R4300
V	B33D-187-2-342BK	Black	50.80	8.51	1.57 - 3.81	15.88	750	B30-R6700
V	B33D-187-2-342	White	50.80	8.51	1.57 - 3.81	15.88	750	B30-R4300
V	B33-187-2-342	White	50.80	8.51	1.57 - 3.81	15.88	750	B30-R4300
V	B33D-187-2-342YL	Yellow	50.80	8.51	1.57 - 3.81	15.88	750	B30-R4300
V	B33-187-2-342YL	Yellow	50.80	8.51	1.57 - 3.81	15.88	750	B30-R4300
V	B33D-250-2-342	White	50.80	11.15	2.39 - 5.46	19.05	500	B30-R4300
V	B33-250-2-342	White	50.80	11.15	2.39 - 5.46	19.05	500	B30-R4300
V	B33D-250-2-342YL	Yellow	50.80	11.15	2.39 - 5.46	19.05	500	B30-R4300
V	B33-250-2-342YL	Yellow	50.80	11.15	2.39 - 5.46	19.05	500	B30-R4300
V	B33D-375-2-342	White	50.80	16.38	3.18 - 8.13	25.40	500	B30-R4300
V	B33-375-2-342	White	50.80	16.38	3.18 - 8.13	25.40	500	B30-R4300
V	B33D-375-2-342YL	Yellow	50.80	16.38	3.18 - 8.13	25.40	500	B30-R4300
V	B33-375-2-342YL	Yellow	50.80	16.38	3.18 - 8.13	25.40	500	B30-R4300
V	B33D-500-2-342	White	50.80	21.62	4.75 - 11.43	31.75	350	B30-R4300
V	B33-500-2-342	White	50.80	21.62	4.75 - 11.43	31.75	350	B30-R4300
V	B33D-500-2-342YL	Yellow	50.80	21.62	4.75 - 11.43	31.75	350	B30-R4300
V	B33-500-2-342YL	Yellow	50.80	21.62	4.75 - 11.43	31.75	350	B30-R4300
V	B33D-750-2-342BK	Black	50.80	31.75	6.35 - 17.78	41.28	250	B30-R6700
V	B33D-750-2-342	White	50.80	31.75	6.35 - 17.78	41.28	250	B30-R4300
V	B33-750-2-342	White	50.80	31.75	6.35 - 17.78	41.28	250	B30-R4300
V	B33D-750-2-342YL	Yellow	50.80	31.75	6.35 - 17.78	41.28	250	B30-R4300
V	B33-750-2-342YL	Yellow	50.80	31.75	6.35 - 17.78	41.28	250	B30-R4300
V	B33D-1000-2-342BK	Black	50.80	42.16	8.46 - 24.13	50.80	250	B30-R6700
V	B33-1000-2-342	White	50.80	42.16	8.46 - 24.13	50.80	250	B30-R4300
V	B33D-1000-2-342YL	Yellow	50.80	42.16	8.46 - 24.13	50.80	250	B30-R4300
V	B33-1000-2-342YL	Yellow	50.80	42.16	8.46 - 24.13	50.80	250	B30-R4300
V	B33D-1500-2-342BK	Black	50.80	61.80	12.70 - 36.83	76.20	150	B30-R6700
V	B33D-1500-2-342	White	50.80	61.80	12.70 - 36.83	76.20	150	B30-R4300
V	B33-1500-2-342	White	50.80	61.80	12.70 - 36.83	76.20	150	B30-R4300
V	B33D-1500-2-342YL	Yellow	50.80	61.80	12.70 - 36.83	76.20	150	B30-R4300
V	B33-1500-2-342YL	Yellow	50.80	61.80	12.70 - 36.83	76.20	150	B30-R4300

ELECTRICAL / DATACOM IDENTIFICATION




B-7641 PermaSleeve low smoke zero halogen wire marking sleeves

Permanent heat shrink wire identification

- ▶ A 2:1 double-sided printable heat-shrink Polyolefin wire marker sleeve designed for wire identification and insulation purposes
- ▶ Contains no added halogens, offers excellent flame retardant characteristics combined with minimal smoke emission

Diagram	Order Reference	Colour	Sleeve Width A (mm)	Sleeve Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Sleeves per Roll	Printer Ribbon Series
V	B33D-94-2-7641	White	50.80	4.62	1.19 - 2.03	12.70	500	B30-R6600
V	B33D-125-2-7641Y	Yellow	50.80	5.97	1.57 - 2.79	12.70	500	B30-R6600
V	B33D-125-2-7641	White	50.80	5.97	1.57 - 2.79	12.70	500	B30-R6600
V	B33D-187-2-7641Y	Yellow	50.80	8.51	2.39 - 3.81	15.88	450	B30-R6600
V	B33D-187-2-7641	White	50.80	8.51	2.39 - 3.81	15.88	450	B30-R6600
V	B33D-250-2-7641Y	Yellow	50.80	11.15	3.18 - 5.46	19.05	400	B30-R6600
V	B33D-250-2-7641	White	50.80	11.15	3.18 - 5.46	19.05	400	B30-R6600
V	B33D-375-2-7641Y	Yellow	50.80	16.38	4.78 - 8.13	25.40	250	B30-R6600
V	B33D-375-2-7641	White	50.80	16.38	4.78 - 8.13	25.40	250	B30-R6600
V	B33D-500-2-7641Y	Yellow	50.80	21.62	6.35 - 11.43	31.75	225	B30-R6600
V	B33D-500-2-7641	White	50.80	21.62	6.35 - 11.43	31.75	225	B30-R6600
V	B33D-750-2-7641Y	Yellow	50.80	31.75	9.53 - 17.78	41.28	150	B30-R6600
V	B33D-1000-2-7641Y	Yellow	50.80	42.16	12.70 - 24.13	50.80	150	B30-R6600
V	B33D-1500-2-7641Y	Yellow	50.80	61.80	19.05 - 36.83	76.20	50	B30-R6600
V	B33D-1500-2-7641	White	50.80	61.80	19.05 - 36.83	76.20	50	B30-R6600




B-7642 PermaSleeve HX polyolefin wire marking sleeves

Military/Industrial grade. 2:1 Shrink ratio

- ▶ A 2:1 heat shrinkable wire marker sleeve that fits snugly around wires
- ▶ Flame-retardant and high-temp rated but not as high temp as B-345 "HT" Sleeves

Diagram	Order Reference	Colour	Sleeve Width A (mm)	Sleeve Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Sleeves per Roll	Printer Ribbon Series
V	B33-94-2-7642	White	50.80	4.62	1.19 - 2.03	12.70	500	B30-R4300
V	B33D-94-2-7642	White	50.80	4.62	1.19 - 2.03	12.70	500	B30-R4300
V	B33-125-2-7642	White	50.80	5.97	1.57 - 2.79	12.70	500	B30-R4300
V	B33D-125-2-7642	White	50.80	5.97	1.57 - 2.79	12.70	500	B30-R4300
V	B33-187-2-7642	White	50.80	8.51	2.39 - 3.81	15.88	450	B30-R4300
V	B33-250-2-7642	White	50.80	11.15	3.18 - 5.46	19.05	400	B30-R4300
V	B33-1000-2-7642	White	50.80	42.16	12.70 - 24.13	50.80	150	B30-R4300
V	B33D-1000-2-7642	White	50.80	42.16	12.70 - 24.13	50.80	150	B30-R4300
V	B33-1500-2-7642	White	50.80	61.80	19.05 - 36.83	76.20	50	B30-R4300
V	B33D-1500-2-7642	White	50.80	61.80	19.05 - 36.83	76.20	50	B30-R4300



2-pass double-side sleeve printing with no wasted sleeves using i3300 printer and Brady Workstation

- ▶ Use double-sided sleeve module in Brady workstation
- ▶ Change text content, size and even rotation for each side!



ELECTRICAL / DATACOM IDENTIFICATION


B-345 PermaSleeve HT high temperature PVDF wire marking sleeves

High temperature, low outgassing. 2:1 Shrink Ratio

- ▶ A 2:1 shrink ratio wire marker sleeve specifically designed for high temperature and low vacuum outgassing applications
- ▶ Made from irradiated high-temp Polyvinylidene Fluoride (PVDF) heat shrink tubing
- ▶ Fade-resistant and flame-retardant

Diagram	Order Reference	Colour	Sleeve Width A (mm)	Sleeve Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Sleeves per Roll	Printer Ribbon Series
V	B33D-94-2-345*	White	50.80	4.62	0.80 - 2.03	12.70	1000	B30-R6000
V	B33D-125-2-345	White	50.80	5.97	1.57 - 2.79	12.70	1000	B30-R6000
V	B33D-187-2-345	White	50.80	8.51	2.39 - 3.81	15.88	750	B30-R6000
V	B33D-250-2-345	White	50.80	11.15	3.18 - 5.46	19.05	500	B30-R6000
V	B33D-375-2-345	White	50.80	16.38	4.75 - 8.13	25.40	500	B30-R6000
V	B33D-500-2-345	White	50.80	21.62	6.35 - 11.43	31.75	350	B30-R6000
V	B33D-750-2-345	White	50.80	31.75	9.53 - 17.78	41.28	250	B30-R6000

*This size is only 3:1 shrink ratio



QuickSleeve Handheld Sleeve Applicator (149474)

B-7697 Rigid DuraSleeve wire marking inserts


DuraSleeve tag carriers are produced in transparent PVC. The special shape of the carrier allows it to adapt to cables of various diameters. There are several sizes of carriers which cater for cables with external diameters from 1.30 mm up to 15 mm.

- ▶ Temperature range: -40 °C to 60 °C
- ▶ Material: PVC

Please contact your local Brady representative to identify and select the most appropriate carrier for your individual application.



Diagram	Order Reference	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
White						
I	B33-10x4.4-7697-WT	10.00	4.40	11.46	2500	B30-R4300, B30-R6200
I	B33-12x4.4-7697-WT	12.00	4.40	11.46	2500	B30-R4300, B30-R6200
I	B33-16x4.4-7697-WT	16.00	4.40	11.46	2500	B30-R4300, B30-R6200
I	B33-23x4.4-7697-WT	23.00	4.40	11.46	2500	B30-R4300, B30-R6200
I	B33-30x4.4-7697-WT	30.63	4.40	11.46	2500	B30-R4300, B30-R6200



PRODUCT & GENERAL PURPOSE IDENTIFICATION




Polyester labels

For general purpose industrial identification applications

- ▶ Widely used for PC board component identification, bin and shelf labels, barcoding and asset tracking
- ▶ 3 levels of adhesive strength

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-422: Polyester									
∞	B33C-312-422	White	7.92	-	25.91	-	1	1	B30-R6000
∞	B33C-375-422	White	9.53	-	25.91	-	1	1	B30-R6000
●	B33-149-422	White	12.70	12.70	-	15.24	5000	4	B30-R6000
●	B33-5-422	White	25.40	12.70	-	15.24	5000	3	B30-R6000
▲	B33-102-422	White	38.10	9.40	-	12.70	2500	1	B30-R6000
●	B33-147-422	White	38.10	9.53	-	12.70	2500	2	B30-R6000
▲	B33-136-422	White	38.10	19.05	-	22.23	1500	1	B30-R6000
▲	B33-17-422	White	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-18-422	White	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-19-422	White	76.20	50.80	-	53.98	500	1	B30-R6000
▲	B33-76-422	White	101.60	76.20	-	79.38	500	1	B30-R6000
B-423: Polyester									
∞	B30C-2000-423	White	50.80	-	30.48	-	1	1	B30-R6000
∞	B30C-3000-423	White	76.20	-	30.48	-	1	1	B30-R6000
∞	B30C-4000-423	White	101.60	-	45.72	-	1	1	B30-R6000
●	B33-11-423	White	6.35	6.35	-	9.53	15000	12	B30-R6000
●	B33-340-423	White	9.53	9.53	-	12.07	10000	7	B30-R6000
●	B33-149-423	White	12.70	12.70	-	15.24	5000	4	B30-R6000
●	B33-343-423	White	12.70	5.08	-	8.26	10000	5	B30-R6000
●	B33-1-423	White	19.05	6.35	-	8.89	5000	4	B30-R6000
▲	B33-46-423	White	19.05	6.35	-	8.89	5000	1	B30-R6000
▲	B33-49-423	White	22.86	6.35	-	8.89	5000	1	B30-R6000
▲	B33-103-423	White	25.40	6.35	-	8.89	5000	1	B30-R6000
●	B33-3-423	White	25.40	9.53	-	12.07	5000	3	B30-R6000
●	B33-5-423	White	25.40	12.70	-	15.24	5000	3	B30-R6000
●	B33-29-423	White	31.75	9.53	-	12.07	5000	2	B30-R6000
▲	B33-43-423	White	31.75	6.35	-	8.89	5000	1	B30-R6000
▲	B33-45-423	White	38.10	6.35	-	8.89	5000	1	B30-R6000
▲	B33-72-423	White	44.45	6.35	-	8.89	5000	1	B30-R6000
▲	B33-53-423	White	50.80	12.70	-	15.24	2500	1	B30-R6000
▲	B33-17-423	White	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-7-423	White	69.85	31.75	-	34.93	1000	1	B30-R6000
▲	B33-19-423	White	76.20	50.80	-	53.98	500	1	B30-R6000
▲	B33-18-423	White	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-20-423	White	76.20	127.00	-	130.18	350	1	B30-R6000
▲	B33-55-423	White	101.60	50.80	-	53.98	750	1	B30-R6000
▲	B33-76-423	White	101.60	76.20	-	79.38	500	1	B30-R6000
▲	B33-161-423	White	101.60	101.60	-	104.78	450	1	B30-R6000
▲	B33-25-423	White	101.60	152.40	-	155.58	300	1	B30-R6000
B-423/B-966B: Polyester with Polyester Overlaminate									
☾	B33-22-423	White	31.75	19.05	-	28.58	2000	2	B30-R6000
◇	B33-23-423	White	50.80	25.40	-	34.93	800	1	B30-R6000
◇	B33-24-423	White	69.85	44.45	-	53.98	500	1	B30-R6000
B-430: Polyester									
∞	B33C-3000-430	Transparent	76.20	-	30.48	-	1	1	B30-R6000
●	B33-5-430	Transparent	25.40	12.70	-	15.24	5000	3	B30-R6000
▲	B33-17-430	Transparent	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-18-430	Transparent	76.20	25.40	-	28.58	1500	1	B30-R6000

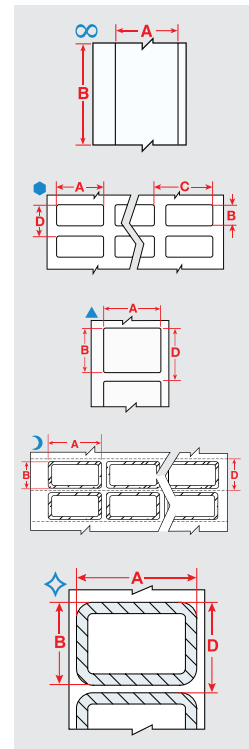

>>


PRODUCT & GENERAL PURPOSE IDENTIFICATION

Polyester labels (continued)

For general purpose industrial identification applications



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-432: Polyester									
∞	B30C-4000-432	Transparent	101.60	-	36.58	-	1	1	B30-R6000
●	B33-149-432	Transparent	12.70	12.70	-	15.24	5000	4	B30-R6000
▲	B33-17-432	Transparent	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-18-432	Transparent	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-19-432	Transparent	76.20	50.80	-	53.98	500	1	B30-R6000
B-483A: Polyester									
∞	B30C-4000-483	White	101.60	-	39.62	-	1	1	B30-R6000
●	B33-149-483	White	12.70	12.70	-	15.24	5000	4	B30-R6000
●	B33-5-483	White	25.40	12.70	-	15.24	5000	3	B30-R6000
▲	B33-17-483	White	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-7-483	White	69.85	31.75	-	34.93	1000	1	B30-R6000
▲	B33-19-483	White	76.20	50.80	-	53.98	500	1	B30-R6000
▲	B33-18-483	White	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-55-483	White	101.60	50.80	-	53.98	750	1	B30-R6000
▲	B33-76-483	White	101.60	76.20	-	79.38	500	1	B30-R6000
B-484A: Polyester									
∞	B30C-4000-484	White	101.60	-	45.72	-	1	1	B30-R6000
▲	B33-125-484	White	22.86	12.70	-	15.24	1500	1	B30-R6000
●	B33-5-484	White	25.40	12.70	-	15.24	5000	3	B30-R6000
▲	B33-136-484	White	38.10	19.05	-	22.23	1500	1	B30-R6000
▲	B33-17-484	White	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-18-484	White	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-19-484	White	76.20	50.80	-	53.98	500	1	B30-R6000
▲	B33-55-484	White	101.60	50.80	-	53.98	750	1	B30-R6000
▲	B33-161-484	White	101.60	101.60	-	104.78	350	1	B30-R6000
B-488: Polyester									
∞	B30C-4000-488	White	101.60	-	39.62	-	1	1	B30-R4300
B-489A: Polyester									
∞	B30C-4000-489	White	101.60	-	39.62	-	1	1	B30-R4300
●	B33-5-489	White	25.40	12.70	-	15.24	5000	3	B30-R4300
▲	B33-17-489	White	50.80	25.40	-	28.58	1500	1	B30-R4300
▲	B33-19-489	White	76.20	50.80	-	53.98	500	1	B30-R4300
▲	B33-18-489	White	76.20	25.40	-	28.58	1500	1	B30-R4300
B-618: Polyester									
●	B33-12-618	White	12.70	11.10	-	13.67	10000	5	B30-R6000
●	B33-5-618	White	25.40	12.70	-	15.24	7000	3	B30-R6000
●	B33-37-618	White	38.10	12.70	-	15.24	5000	2	B30-R6000
●	B33-6-618	White	38.10	19.05	-	22.23	3300	2	B30-R6000
▲	B33-53-618	White	50.80	12.70	-	15.24	2500	1	B30-R6000
▲	B33-17-618	White	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-7-618	White	69.85	31.75	-	34.93	1000	1	B30-R6000
▲	B33-18-618	White	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-19-618	White	76.20	50.80	-	53.98	700	1	B30-R6000
▲	B33-55-618	White	101.60	50.80	-	53.98	750	1	B30-R6000
▲	B33-76-618	White	101.60	76.20	-	79.38	500	1	B30-R6000
B-8423: Polyester									
●	B33-12-8423	White	12.70	11.10	-	14.13	2500	7	B30-R6000
●	B33-101-8423	White	19.05	6.35	-	9.40	2500	5	B30-R6000
●	B33-G2-8423YL	Yellow	20.00	7.95	-	15.00	5000	4	B30-R6000
●	B33-13-8423	White	31.75	6.35	-	9.35	2500	3	B30-R6000
●	B33-104-8423	White	38.10	6.35	-	9.33	2500	2	B30-R6000
●	B33-600-8423	White	38.10	19.05	-	22.05	2500	2	B30-R6000

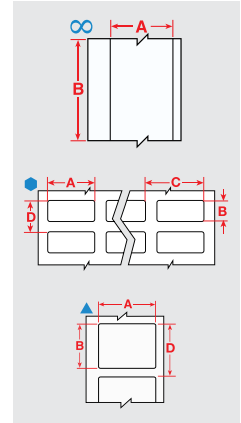

>>


PRODUCT & GENERAL PURPOSE IDENTIFICATION



Polyester labels (continued)

For general purpose industrial identification applications

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-8591: Polyester									
∞	B33C-2000-8591-BK	Black	50.80	-	30.48	-	1	1	B30-R4400-WT
∞	B33C-2000-8591-SL	Silver	50.80	-	30.48	-	1	1	B30-R6600
∞	B33C-2000-8591-WT	White	50.80	-	30.48	-	1	1	B30-R6600
∞	B33C-2000-8591-YL	Yellow	50.80	-	30.48	-	1	1	B30-R6600
∞	B33C-3000-8591-BK	Black	76.20	-	30.48	-	1	1	B30-R4400-WT
∞	B33C-3000-8591-SL	Silver	76.20	-	30.48	-	1	1	B30-R6600
∞	B33C-3000-8591-WT	White	76.20	-	30.48	-	1	1	B30-R6600
∞	B33C-3000-8591-YL	Yellow	76.20	-	30.48	-	1	1	B30-R6600
∞	B33C-4000-8591-BK	Black	101.60	-	30.48	-	1	1	B30-R4400-WT
∞	B33C-4000-8591-SL	Silver	101.60	-	30.48	-	1	1	B30-R6600
∞	B33C-4000-8591-WT	White	101.60	-	30.48	-	1	1	B30-R6600
∞	B33C-4000-8591-YL	Yellow	101.60	-	30.48	-	1	1	B30-R6600
●	B33-37-8591-BK	Black	38.10	12.70	-	15.24	4000	2	B30-R4400-WT
●	B33-37-8591-SL	Silver	38.10	12.70	-	15.24	4000	2	B30-R6600
●	B33-37-8591-WT	White	38.10	12.70	-	15.24	4000	2	B30-R6600
●	B33-37-8591-YL	Yellow	38.10	12.70	-	15.24	4000	2	B30-R6600
▲	B33-53-8591-BK	Black	50.80	12.70	-	15.24	2500	1	B30-R4400-WT
▲	B33-53-8591-SL	Silver	50.80	12.70	-	15.24	2500	1	B30-R6600
▲	B33-53-8591-WT	White	50.80	12.70	-	15.24	2500	1	B30-R6600
▲	B33-53-8591-YL	Yellow	50.80	12.70	-	15.24	2500	1	B30-R6600
▲	B33-7-8591-BK	Black	69.85	31.75	-	34.93	1000	1	B30-R4400-WT
▲	B33-7-8591-SL	Silver	69.85	31.75	-	34.93	1000	1	B30-R6600
▲	B33-7-8591-WT	White	69.85	31.75	-	34.93	1000	1	B30-R6600
▲	B33-7-8591-YL	Yellow	69.85	31.75	-	34.93	1000	1	B30-R6600
▲	B33-76-8591-BK	Black	101.60	76.20	-	79.38	400	1	B30-R4400-WT
▲	B33-76-8591-SL	Silver	101.60	76.20	-	79.38	400	1	B30-R6600
▲	B33-76-8591-WT	White	101.60	76.20	-	79.38	400	1	B30-R6600
▲	B33-76-8591-YL	Yellow	101.60	76.20	-	79.38	400	1	B30-R6600

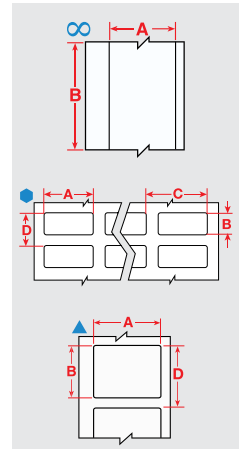


Metallised polyester labels

For product labelling, asset tracking and general industrial identification

- ▶ Silver metallic label withstands solvents and variable temperatures
- ▶ Ideal for serial number plates and rating plates with nameplate quality and metal looking finish

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-413: Metallic, Non-metal Polyester									
∞	B33C-2000-413	Silver	50.80	-	30.48	-	1	1	B30-R6000
∞	B33C-3000-413	Silver	76.20	-	30.48	-	1	1	B30-R6000
∞	B33C-4000-413	Silver	101.60	-	30.48	-	1	1	B30-R6000
●	B33-5-413	Silver	25.40	12.70	-	15.24	7000	3	B30-R6000
●	B33-37-413	Silver	38.10	12.70	-	15.24	5000	2	B30-R6000
●	B33-6-413	Silver	38.10	19.05	-	22.23	3300	2	B30-R6000
▲	B33-17-413	Silver	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-53-413	Silver	50.80	12.70	-	15.24	2500	1	B30-R6000
▲	B33-7-413	Silver	69.85	31.75	-	34.93	1000	1	B30-R6000
▲	B33-18-413	Silver	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-19-413	Silver	76.20	50.80	-	53.98	700	1	B30-R6000
▲	B33-55-413	Silver	101.60	50.80	-	53.98	750	1	B30-R6000

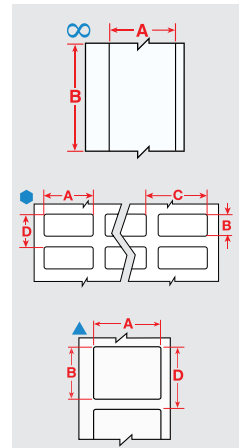

>>


PRODUCT & GENERAL PURPOSE IDENTIFICATION



Metallised polyester labels (continued)

For product labelling, asset tracking and general industrial identification

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-428: Metallised Polyester									
∞	B30C-2000-428	Light Grey	50.80	-	30.48	-	1	1	B30-R4300
∞	B30C-4000-428	Light Grey	101.60	-	39.62	-	1	1	B30-R4300
●	B33-616-428	Light Grey	22.86	19.05	-	22.05	3000	3	B30-R4300
●	B33-5-428	Light Grey	25.40	12.70	-	15.24	5000	3	B30-R4300
●	B33-37-428	Light Grey	38.10	12.70	-	15.24	4000	2	B30-R4300
●	B33-6-428	Light Grey	38.10	19.05	-	22.23	3000	2	B30-R4300
▲	B33-53-428	Light Grey	50.80	12.70	-	15.24	2500	1	B30-R4300
▲	B33-17-428	Light Grey	50.80	25.40	-	28.58	1500	1	B30-R4300
▲	B33-7-428	Light Grey	69.85	31.75	-	34.93	1000	1	B30-R4300
▲	B33-19-428	Light Grey	76.20	50.80	-	53.98	500	1	B30-R4300
▲	B33-18-428	Light Grey	76.20	25.40	-	28.58	1500	1	B30-R4300
▲	B33-55-428	Light Grey	101.60	50.80	-	53.98	500	1	B30-R4300
▲	B33-161-428	Light Grey	101.60	101.60	-	104.78	300	1	B30-R4300
B-428/B-966B: Metallised Polyester with Polyester Overlaminat									
☾	B33-22-428	Light Grey	31.75	19.05	-	28.58	1700	2	B30-R4300
◇	B33-23-428	Light Grey	50.80	25.40	-	34.93	700	1	B30-R4300
◇	B33-24-428	Light Grey	69.85	44.45	-	53.98	450	1	B30-R4300
B-434A: Metallised Polyester									
∞	B30C-2000-434	Silver	50.80	-	30.48	-	1	1	B30-R6000
∞	B30C-3000-434	Silver	76.20	-	30.48	-	1	1	B30-R6000
∞	B30C-4000-434	Silver	101.60	-	39.62	-	1	1	B30-R6000
●	B33-5-434	Silver	25.40	12.70	-	15.24	5000	3	B30-R6000
▲	B33-136-434	Silver	38.10	19.05	-	22.23	1500	1	B30-R6000
●	B33-37-434	Silver	38.10	12.70	-	15.24	5000	2	B30-R6000
●	B33-6-434	Silver	38.10	19.05	-	22.23	3300	2	B30-R6000
▲	B33-17-434	Silver	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-53-434	Silver	50.80	12.70	-	15.24	2500	1	B30-R6000
▲	B33-7-434	Silver	69.85	31.75	-	34.93	1000	1	B30-R6000
▲	B33-18-434	Silver	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-19-434	Silver	76.20	50.80	-	53.98	500	1	B30-R6000
▲	B33-55-434	Silver	101.60	50.80	-	53.98	750	1	B30-R6000
▲	B33-161-434	Silver	101.60	101.60	-	104.78	350	1	B30-R6000
B-435A: Metallised Polyester									
∞	B33C-2000-435	Silver	50.80	-	30.48	-	1	1	B30-R6000
∞	B33C-3000-435	Silver	76.20	-	30.48	-	1	1	B30-R6000
●	B33-5-435	Silver	25.40	12.70	-	15.24	7000	3	B30-R6000
●	B33-37-435	Silver	38.10	12.70	-	15.24	5000	2	B30-R6000
●	B33-6-435	Silver	38.10	19.05	-	22.23	3300	2	B30-R6000
▲	B33-53-435	Silver	50.80	12.70	-	15.24	2500	1	B30-R6000
●	B33-17-435	Silver	50.80	25.40	-	28.58	1500	1	B30-R6000
▲	B33-7-435	Silver	69.85	31.75	-	34.93	1000	1	B30-R6000
▲	B33-18-435	Silver	76.20	25.40	-	28.58	1500	1	B30-R6000
▲	B33-19-435	Silver	76.20	50.80	-	53.98	500	1	B30-R6000
▲	B33-55-435	Silver	101.60	50.80	-	53.98	750	1	B30-R6000
●	B33-161-435	Silver	101.60	101.60	-	104.78	350	1	B30-R6000
B-480A: Metallic, Non-metal Polyester									
∞	B30C-4000-480	Light Grey	101.60	-	35.05	-	1	1	B30-R6000

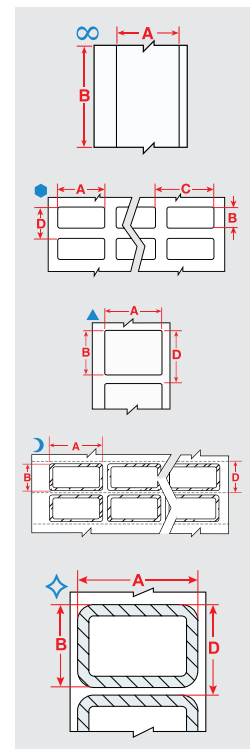

>>


PRODUCT & GENERAL PURPOSE IDENTIFICATION



Metallised polyester labels (continued)

For product labelling, asset tracking and general industrial identification

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-486B: Metallised Polyester									
∞	B30C-4000-486	Light Grey	101.60	-	35.05	-	1	1	B30-R4300
▲	B33-59-486	Light Grey	25.40	12.70	-	15.24	2500	1	B30-R4300
●	B33-5-486	Light Grey	25.40	12.70	-	15.24	5000	3	B30-R4300
▲	B33-53-486	Light Grey	50.80	12.70	-	15.24	2500	1	B30-R4300
▲	B33-17-486	Light Grey	50.80	25.40	-	28.58	1300	1	B30-R4300
▲	B33-7-486	Light Grey	69.85	31.75	-	34.93	1000	1	B30-R4300
▲	B33-19-486	Light Grey	76.20	50.80	-	53.98	500	1	B30-R4300
▲	B33-18-486	Light Grey	76.20	25.40	-	28.58	1300	1	B30-R4300
▲	B33-161-486	Light Grey	101.60	101.60	-	104.78	250	1	B30-R4300
▲	B33-76-486	Light Grey	101.60	76.20	-	79.38	500	1	B30-R4300
B-565: Metallised Polyester									
∞	B30C-1125-565-SL	Silver	28.58	-	30.48	-	1	1	B30-R10000
∞	B30C-2250-565-SL	Silver	57.15	-	30.48	-	1	1	B30-R10000
∞	B30C-4000-565-SL	Silver	101.60	-	30.48	-	1	1	B30-R10000
B-7563: Metallised Polyester									
●	B33-600-7563	Silver	38.10	19.05	-	22.05	2500	2	B30-R6000
●	B30-135-7563	Silver	38.10	19.05	-	22.22	3154	2	B30-R6000
▲	B30-17-7563	Silver	50.80	25.40	-	28.58	1226	1	B30-R6000
▲	B30-7-7563	Silver	69.85	31.75	-	34.93	1003	1	B30-R6000
▲	B30-222-7563	Silver	76.20	50.80	-	57.15	649	1	B30-R6000

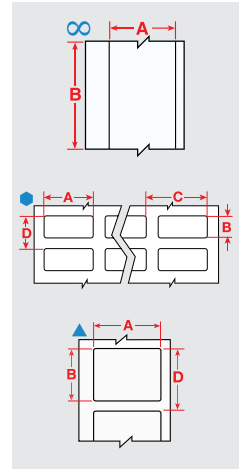


B-438 Tamper Evident Metallised Polyester Labels

For secure identification that indicates if it has been tampered with

- ▶ B-438 Metallised Polyester Labels have a permanent adhesive that leaves a checkerboard footprint if removed.

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
●	B33-5-438	Silver	25.40	12.70	-	15.24	7000	3	B30-R4300
●	B33-37-438	Silver	38.10	12.70	-	15.24	5000	2	B30-R4300
●	B33-6-438	Silver	38.10	19.05	-	22.23	3300	2	B30-R4300
▲	B30-17-438	Silver	50.80	25.40	-	28.58	1225	1	B30-R4300
▲	B33-53-438	Silver	50.80	12.70	-	15.24	2500	1	B30-R4300
▲	B33-7-438	Silver	69.85	31.75	-	34.93	1000	1	B30-R4300
▲	B30-18-438	Silver	76.20	25.40	-	31.75	1225	1	B30-R4300
▲	B30-222-438	Silver	76.20	50.80	-	57.15	650	1	B30-R4300
▲	B33-55-438	Silver	101.60	50.80	-	53.98	750	1	B30-R4300
▲	B33-76-438	Silver	101.60	76.20	-	79.38	500	1	B30-R4300
∞	B30C-3000-438	Silver	76.20	-	30.48	-	1	1	B30-R4300

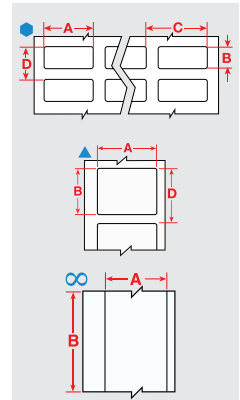


B-425 Polypropylene labels

General labelling material for indoor use

- ▶ Outstanding chemical and solvent resistance and print performance
- ▶ Not recommended for prolonged outdoor use (use B-595 indoor/outdoor vinyl for 8-10 year outdoor use)

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
▲	B33-17-425	White	50.80	25.40	28.58	1500	1	B30-R4300
▲	B33-18-425	White	76.20	25.40	28.58	1500	1	B30-R4300
●	B33-5-425	White	25.40	12.70	15.24	5000	3	B30-R4300
▲	B33-19-425	White	76.20	50.80	53.98	500	1	B30-R4300



PRODUCT & GENERAL PURPOSE IDENTIFICATION


B-439 General identification vinyl labels

High Adhesion

- ▶ Designed for use in ambient conditions with limited solvent exposure
- ▶ Indoor/outdoor vinyl film has an acrylic pressure sensitive adhesive
- ▶ Service temperature of -70 to 40° C
- ▶ Available in many different colours as a custom option



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
●	B33-5-439	White	25.40	12.70	15.24	7000	3	B30-R6000
●	B33-37-439	White	38.10	12.70	15.24	5000	2	B30-R6000
▲	B33-17-439	White	50.80	25.40	28.58	1000	1	B30-R6000
▲	B33-53-439	White	50.80	12.70	15.24	2500	1	B30-R6000
▲	B33-18-439	White	76.20	25.40	28.58	1000	1	B30-R6000
▲	B33-19-439	White	76.20	50.80	53.98	700	1	B30-R6000
▲	B33-55-439	White	101.60	50.80	53.98	700	1	B30-R6000
▲	B33-76-439	White	101.60	76.20	79.38	500	1	B30-R6000




B-595 Outdoor grade vinyl labels

For 8-10 year outdoor use

- ▶ Semi-gloss finish
- ▶ Good chemical, moisture, UV and weather resistance
- ▶ Highly pliable material conforms to rough and curved surfaces and equipment
- ▶ Average outdoor durability of the label is 8-10 years depending on the placement



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B30-242-595-BLNKWT	White	28.58	72.39	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT	White	57.15	97.79	107.95	250	B30-R10000
▲	B30-241-595-BLNKYL	Yellow	57.15	76.20	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT	White	76.20	57.15	82.55	300	B30-R10000
▲	B30-25-595-BLNKYL	Yellow	101.60	152.40	158.75	175	B30-R10000
▲	B30-25-595-BLNKWT	White	152.40	101.60	158.75	175	B30-R10000




B-424 Paper labels

Economical choice for light duty general identification

- ▶ White finish and matt topcoat
- ▶ Excellent contrast and smear resistance for barcode printing



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B33-53-424	White	50.80	12.70	-	15.24	2500	B30-R4300
▲	B33-17-424	White	50.80	25.40	-	28.58	1500	B30-R4300
▲	B33-7-424	White	69.85	31.75	-	34.93	1000	B30-R4300
▲	B33-20-424	White	76.20	127.00	-	130.18	250	B30-R4300
▲	B33-19-424	White	76.20	50.80	-	53.98	500	B30-R4300
▲	B33-18-424	White	76.20	25.40	-	28.58	1500	B30-R4300
▲	B33-55-424	White	101.60	50.80	-	53.98	750	B30-R4300
▲	B33-25-424	White	101.60	152.40	-	155.58	350	B30-R4300
∞	B30C-4000-424	White	101.60	-	45.72	-	1	B30-R4300



ELECTRONICS IDENTIFICATION




Static dissipative polyimide labels

For printed circuit board and electronic component identification

- ▶ Static dissipative adhesive and release liner with surface resistivity values
- ▶ Complies with EIA-541 Packaging Material Standards for ESD sensitive items
- ▶ Withstands the various processes, fluxes and cleaning solvents encountered in the manufacture of PC Boards
- ▶ For use on top or bottom-sided component identification or board identification

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-719: Polyimide								
●	B33-70-719	White	6.35	6.35	8.89	20000	7	B30-R6000
●	B33-38-719	White	9.53	9.53	12.07	5000	7	B30-R6000
●	B33-340-719	White	9.53	9.53	12.07	10000	7	B30-R6000
●	B33-12-719	White	12.70	11.10	13.64	10000	5	B30-R6000
●	B33-341-719	White	16.51	5.08	8.26	10000	4	B30-R6000
▲	B33-46-719	White	19.05	6.35	8.89	5000	1	B30-R6000
●	B33-1-719	White	19.05	6.35	8.89	10000	4	B30-R6000
●	B33-2-719	White	22.86	6.35	8.89	5000	3	B30-R6000
●	B33-51-719	White	25.40	6.35	8.89	10000	3	B30-R6000
▲	B33-103-719	White	25.40	6.35	8.89	4000	1	B30-R6000
●	B33-5-719	White	25.40	12.70	15.24	7000	3	B30-R6000
▲	B33-43-719	White	31.75	6.35	8.89	5000	1	B30-R6000
●	B33-13-719	White	31.75	6.35	9.53	7000	2	B30-R6000
●	B33-4-719	White	38.10	6.35	8.89	8000	2	B30-R6000
B-767: Static Dissipative Polyimide								
●	B33-70-767	White	6.35	6.35	8.89	20000	7	B30-R6300
●	B33-340-767	White	9.53	9.53	12.07	10000	7	B30-R6300
●	B33-12-767	White	12.70	11.10	13.64	10000	5	B30-R6300
●	B33-341-767	White	16.51	5.08	8.26	10000	4	B30-R6300
●	B33-1-767	White	19.05	6.35	8.89	10000	4	B30-R6300
▲	B33-46-767	White	19.05	6.35	8.89	5000	1	B30-R6300
●	B33-2-767	White	22.86	6.35	8.89	10000	3	B30-R6300
●	B33-51-767	White	25.40	6.35	8.89	10000	3	B30-R6300
▲	B33-103-767	White	25.40	6.35	8.89	5000	1	B30-R6300
●	B33-13-767	White	31.75	6.35	9.53	7000	2	B30-R6300
▲	B33-43-767	White	31.75	6.35	8.89	5000	1	B30-R6300
▲	B33-45-767	White	38.10	6.35	8.89	5000	1	B30-R6300
●	B33-4-767	White	38.10	6.35	8.89	8000	2	B30-R6300
B-768: Static Dissipative Polyimide								
●	B33-11-768	White	6.35	6.35	9.53	15000	12	B30-R6300
●	B33-340-768	White	9.53	9.53	12.07	10000	7	B30-R6300
●	B33-12-768	White	12.70	11.10	13.64	10000	5	B30-R6300
●	B33-341-768	White	16.51	5.08	8.26	10000	4	B30-R6300
●	B33-1-768	White	19.05	6.35	8.89	5000	4	B30-R6300
▲	B33-46-768	White	19.05	6.35	8.89	5000	1	B30-R6300
●	B33-2-768	White	22.86	6.35	8.89	10000	3	B30-R6300
▲	B33-49-768	White	22.86	6.35	8.89	5000	1	B30-R6300
●	B33-51-768	White	25.40	6.35	8.89	10000	3	B30-R6300
▲	B33-103-768	White	25.40	6.35	8.89	4000	1	B30-R6300
●	B33-5-768	White	25.40	12.70	15.24	10000	3	B30-R6300
●	B33-13-768	White	31.75	6.35	9.53	7000	2	B30-R6300
●	B33-4-768	White	38.10	6.35	8.89	8000	2	B30-R6300
▲	B33-45-768	White	38.10	6.35	8.89	5000	1	B30-R6300
▲	B33-72-768	White	44.45	6.35	8.89	5000	1	B30-R6300
▲	B33-15-768	White	50.80	6.35	9.53	3200	1	B30-R6300





B-8423 Polyester labels

For circuit board and component identification

- SMT - Top/Bottom; Through Hole - Bottom; Through Hole - Top

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
●	B33-12-8423	White	12.70	11.10	14.13	2500	7	B30-R6000
●	B33-101-8423	White	19.05	6.35	9.40	2500	5	B30-R6000
●	B33-G2-8423YL	Yellow	20.00	7.95	15.00	5000	4	B30-R6000
●	B33-13-8423	White	31.75	6.35	9.35	2500	3	B30-R6000
●	B33-104-8423	White	38.10	6.35	9.33	2500	2	B30-R6000





Standard polyimide labels

For circuit board labels and high-temperature general identification applications

- Withstands the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards
- For use on top bottom-side component identification or board identification
- 2 temperature levels to meet your needs

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-724: Polyimide									
∞	B30C-4000-724	Amber	101.60	-	39.62	-	1	1	B30-R4300
●	B33-340-724	Amber	9.53	9.53	-	12.07	10000	7	B30-R4300
▲	B33-344-724	Amber	12.70	5.08	-	8.26	3700	1	B30-R4300
●	B33-12-724	Amber	12.70	11.10	-	13.64	10000	5	B30-R4300
●	B33-341-724	Amber	16.51	5.08	-	8.26	10000	4	B30-R4300
▲	B33-342-724	Amber	16.51	5.08	-	8.26	3700	1	B30-R4300
●	B33-1-724	Amber	19.05	6.35	-	8.89	5000	4	B30-R4300
▲	B33-46-724	Amber	19.05	6.35	-	8.89	5000	1	B30-R4300
●	B33-2-724	Amber	22.86	6.35	-	8.89	5000	3	B30-R4300
●	B33-51-724	Amber	25.40	6.35	-	8.89	10000	3	B30-R4300
▲	B33-103-724	Amber	25.40	6.35	-	8.89	4000	1	B30-R4300
●	B33-5-724	Amber	25.40	12.70	-	15.24	7000	3	B30-R4300
●	B33-13-724	Amber	31.75	6.35	-	9.53	7000	2	B30-R4300
●	B33-4-724	Amber	38.10	6.35	-	8.89	5000	2	B30-R4300
B-728: Polyimide									
●	B33-70-728	White	6.35	6.35	-	8.89	20000	7	B30-R6000
●	B33-340-728	White	9.53	9.53	-	12.07	10000	7	B30-R6000
●	B33-12-728	White	12.70	11.10	-	13.64	10000	5	B30-R6000
●	B33-341-728	White	16.51	5.08	-	8.26	10000	4	B30-R6000
●	B33-1-728	White	19.05	6.35	-	8.89	10000	4	B30-R6000
●	B33-2-728	White	22.86	6.35	-	8.89	10000	3	B30-R6000
●	B33-5-728	White	25.40	12.70	-	15.24	7000	3	B30-R6000
●	B33-51-728	White	25.40	6.35	-	8.89	10000	3	B30-R6000
▲	B33-103-728	White	25.40	6.35	-	8.89	4000	1	B30-R6000
●	B33-13-728	White	31.75	6.35	-	9.53	7000	2	B30-R6000
▲	B33-43-728	White	31.75	6.35	-	8.89	4000	1	B30-R6000
●	B33-4-728	White	38.10	6.35	-	8.89	8000	2	B30-R6000

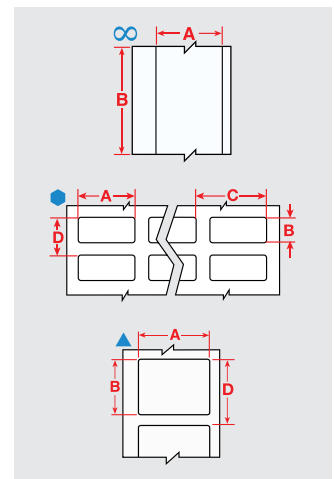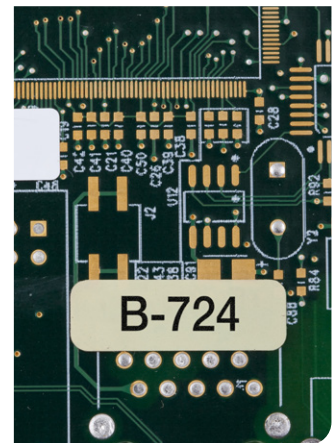

>>


ELECTRONICS IDENTIFICATION



Standard polyimide labels (continued)

For circuit board labels and high-temperature general identification applications

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Labels per Row	Printer Ribbon Series
B-729: Polyimide									
●	B33-70-729	White	6.35	6.35	—	8.89	20000	7	B30-R6000
●	B33-340-729	White	9.53	9.53	—	12.07	10000	7	B30-R6000
●	B33-12-729	White	12.70	11.10	—	13.64	10000	5	B30-R6000
●	B33-341-729	White	16.51	5.08	—	8.26	10000	4	B30-R6000
●	B33-1-729	White	19.05	6.35	—	8.89	10000	4	B30-R6000
●	B33-2-729	White	22.86	6.35	—	8.89	10000	3	B30-R6000
●	B33-5-729	White	25.40	12.70	—	15.24	7000	3	B30-R6000
●	B33-51-729	White	25.40	6.35	—	8.89	10000	3	B30-R6000
▲	B33-103-729	White	25.40	6.35	—	8.89	4000	1	B30-R6000
●	B33-13-729	White	31.75	6.35	—	9.53	7000	2	B30-R6000
▲	B33-43-729	White	31.75	6.35	—	8.89	4000	1	B30-R6000
●	B33-4-729	White	38.10	6.35	—	8.89	8000	2	B30-R6000
B-777: Polyimide									
●	B33-70-777	White	6.35	6.35	—	8.89	20000	7	B30-R6300
●	B33-340-777	White	9.53	9.53	—	12.07	10000	7	B30-R6300
●	B33-12-777	White	12.70	11.10	—	13.64	10000	5	B30-R6300
●	B33-341-777	White	16.51	5.08	—	8.26	10000	4	B30-R6300
●	B33-1-777	White	19.05	6.35	—	8.89	10000	4	B30-R6300
●	B33-2-777	White	22.86	6.35	—	8.89	10000	3	B30-R6300
●	B33-51-777	White	25.40	6.35	—	8.89	10000	3	B30-R6300
▲	B33-103-777	White	25.40	6.35	—	8.89	4000	1	B30-R6300
●	B33-5-777	White	25.40	12.70	—	15.24	7000	3	B30-R6300
●	B33-13-777	White	31.75	6.35	—	9.53	7000	2	B30-R6300
▲	B33-43-777	White	31.75	6.35	—	8.89	4000	1	B30-R6300
●	B33-4-777	White	38.10	6.35	—	8.89	8000	2	B30-R6300
B-797: Polyimide									
∞	B30C-4000-797	White	101.60	-	39.62	-	1	1	B30-R6300
●	B33-70-797	White	6.35	6.35	—	8.89	20000	7	B30-R6300
●	B33-11-797	White	6.35	6.35	—	9.53	5000	12	B30-R6300
●	B33-71-797	White	8.00	8.00	—	11.43	20000	6	B30-R6300
●	B33-340-797	White	9.53	9.53	—	12.07	10000	7	B30-R6300
●	B33-12-797	White	12.70	11.10	—	13.64	10000	5	B30-R6300
●	B33-149-797	White	12.70	12.70	—	15.24	5000	4	B30-R6300
●	B33-341-797	White	16.51	5.08	—	8.26	10000	4	B30-R6300
▲	B33-342-797	White	16.51	5.08	—	8.26	3700	1	B30-R6300
●	B33-1-797	White	19.05	6.35	—	8.89	5000	4	B30-R6300
▲	B33-49-797	White	22.86	6.35	—	8.89	5000	1	B30-R6300
●	B33-2-797	White	22.86	6.35	—	8.89	5000	3	B30-R6300
●	B33-51-797	White	25.40	6.35	—	8.89	10000	3	B30-R6300
●	B33-3-797	White	25.40	9.53	—	12.07	20000	3	B30-R6300
●	B33-5-797	White	25.40	12.70	—	15.24	7000	3	B30-R6300
▲	B33-103-797	White	25.40	6.35	—	8.89	5000	1	B30-R6300
▲	B33-58-797	White	25.40	9.53	—	12.07	4000	1	B30-R6300
▲	B33-59-797	White	25.40	12.70	—	15.24	2500	1	B30-R6300
●	B33-13-797	White	31.75	6.35	—	9.53	5000	2	B30-R6300
▲	B33-43-797	White	31.75	6.35	—	8.89	5000	1	B30-R6300
▲	B33-44-797	White	34.93	6.35	—	8.89	5000	1	B30-R6300
▲	B33-45-797	White	38.10	6.35	—	8.89	5000	1	B30-R6300
●	B33-4-797	White	38.10	6.35	—	8.89	10000	2	B30-R6300
▲	B33-72-797	White	44.45	6.35	—	8.89	5000	1	B30-R6300
▲	B33-15-797	White	50.80	6.35	—	9.53	3200	1	B30-R6300

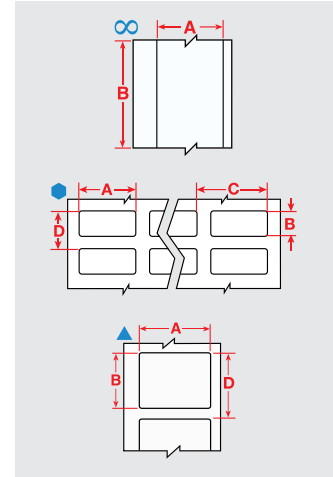

B-461, B-490, B-492, B-498 & B-499 Vial & tube labels

Always have clear, legible specimen samples

- ▶ Labels are designed to withstand extreme laboratory environments.
- ▶ Resistant to laboratory solvents like Xylene, ethanol, alcohol and DMSO.
- ▶ Identification is always legible – and will not smear, fade or fall off.
- ▶ B-490, can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself.
- ▶ B-492, can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen.

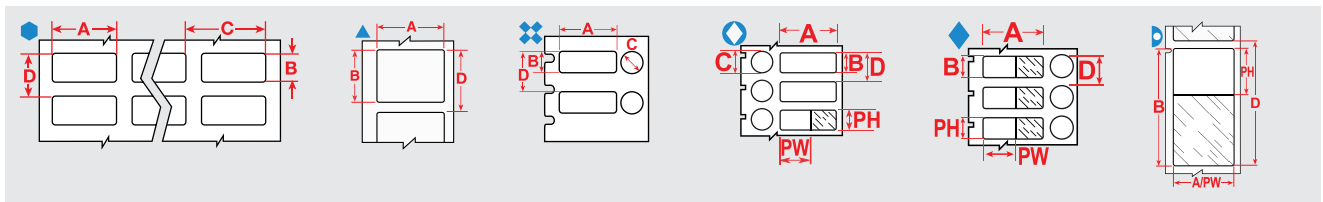


Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
0.5 ml													
●	B33-68-499	White	B-499	F N A	12.70	19.05	-	-	-	21.59	4	1500	B30-R4300
●	B33-68-498	White	B-498	F R	12.70	19.05	-	-	-	21.59	4	5000	B30-R6200
●	B33-68-490	White	B-490	F N H L	12.70	19.05	-	-	-	22.23	4	2500	B30-R4300
▲	B33-620-499	White	B-499	F N A	12.70	25.40	-	-	-	28.40	1	1000	B30-R6000
●	B33-611-499	White	B-499	F N A	12.70	25.40	-	-	-	28.40	3	3000	B30-R6000
▲	B33-125-499	White	B-499	F N A	22.86	12.70	-	-	-	15.24	1	1500	B30-R4300
▲	B33-125-490	White	B-490	F N H L	22.86	12.70	-	-	-	15.24	1	1650	B30-R4300
⊘	B33-126-499	White	B-499	F A	22.86	12.70	12.70	-	-	15.24	1	1500	B30-R4300
⊘	B33-126-490	White	B-490	F H L	22.86	12.70	12.70	-	-	15.24	1	2500	B30-R4300
●	B33-152-499	White	B-499	F N A	25.40	9.53	-	-	-	12.07	2	1500	B30-R4300
●	B33-152-492	White	B-492	F N H L	25.40	9.53	-	-	-	12.07	2	2500	B30-R6400
⊘	B33-163-499	White	B-499	F A	25.40	9.53	9.53	-	-	12.70	1	1500	B30-R4300
⊘	B33-163-492	White	B-492	F H L	25.40	9.53	9.53	-	-	12.70	1	1500	B30-R6400
◆	B33-606-461	White	B-461	F A H S L	25.40	9.53	9.53	25.40	9.53	16.53	1	1000	B30-R4300
▲	B33-659-499	White	B-499	F N A	25.40	12.45	-	-	-	15.40	1	1000	B30-R6000
▲	B33-59-492	White	B-492	F N H L	25.40	12.70	-	-	-	15.24	1	2500	B30-R6400
●	B33-5-499	White	B-499	F N A	25.40	12.70	-	-	-	15.24	3	5000	B30-R6000
⊘	B33-181-492	White	B-492	F H L	25.40	12.70	9.53	-	-	15.24	1	1500	B30-R6400
⊘	B33-182-492	White	B-492	F H L	25.40	12.70	11.18	-	-	15.24	1	1500	B30-R6400
●	B33-127-461	White	B-461	F N A H S L	55.88	12.70	-	19.05	12.70	61.60	3	1500	B30-R4300
1.5 ml													
●	B33-1-499	White	B-499	F N A	19.05	6.35	-	-	-	8.89	4	10000	B30-R6000
▲	B33-254-499	White	B-499	F N A	19.05	19.05	-	-	-	21.59	1	1000	B30-R6000
●	B33-91-499	White	B-499	F N A	19.05	23.80	-	-	-	26.97	4	2500	B30-R6000
●	B33-88-499	White	B-499	F N A	25.40	19.05	-	-	-	22.23	2	2500	B30-R6000
▯	B33-153-461	White	B-461	F N A H S L	66.68	15.24	-	25.40	15.24	19.05	1	1500	B30-R4300
2.0 ml													
●	B33-90-499	White	B-499	F N A	6.35	36.50	-	-	-	39.67	6	2500	B30-R6000
●	B33-628-461	White	B-461	F N A H S L	15.24	38.10	-	15.24	33.02	22.38	2	2500	B30-R4300
●	B33-612-461	White	B-461	F N A H S L	15.24	66.68	-	15.24	25.40	73.66	3	1500	B30-R4300
▲	B33-180-492	White	B-492	F N H L	22.86	25.40	-	-	-	27.94	1	1500	B30-R6400
▲	B33-179-492	White	B-492	F N H L	25.40	25.40	-	-	-	27.94	1	1900	B30-R6400
▯	B33-183-461	White	B-461	F N A H S L	44.45	25.40	-	25.40	25.40	28.58	1	2000	B30-R4300

>>

F Freezer environment **N** Liquid nitrogen environment **A** Autoclave environment **H** Hot water bath (100°C) **S** Self-laminating label **L** Low-profile (extremely thin) label **R** Removable

LABORATORY IDENTIFICATION

B-461, B-490, B-492, B-498 & B-499 Vial & tube labels (continued)

Always have clear, legible specimen samples

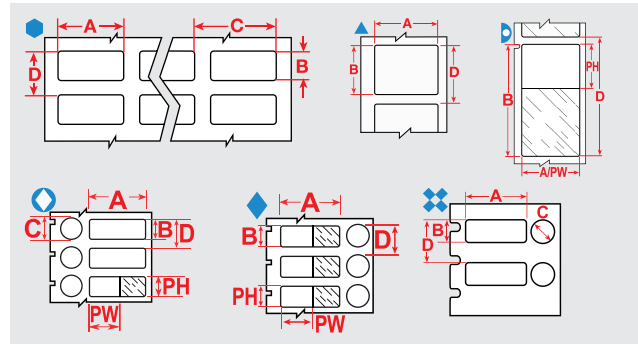


Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
4.0 ml													
●	B33-87-499	White	B-499	F N A	12.70	36.50	-	-	-	39.67	6	2500	B30-R6000
▷	B33-638-461	White	B-461	F N A H S L	15.24	48.26	-	15.24	39.88	22.24	1	2000	B30-R4300
●	B33-621-499	White	B-499	F N A	25.40	36.50	-	-	-	39.50	3	3000	B30-R6000
●	B33-89-499	White	B-499	F N A	25.40	36.50	-	-	-	39.67	3	2300	B30-R6000
▷	B33-632-461	White	B-461	F N A H S L	34.93	45.72	-	34.93	39.88	41.93	1	1500	B30-R4300
▲	B33-155-492	White	B-492	F N H L	41.28	15.24	-	-	-	17.78	1	1500	B30-R6400
▲	B33-155-490	White	B-490	F N H L	41.28	15.24	-	-	-	17.78	1	1500	B30-R4300
●	B33-133-461	White	B-461	F N A H S L	41.28	15.24	-	25.40	15.24	46.99	3	1500	B30-R4300
✱	B33-190-492	White	B-492	F H L	41.28	15.24	9.53	-	-	17.78	1	1500	B30-R6400
○	B33-608-461	White	B-461	F A H S L	41.28	15.24	12.70	41.28	15.24	22.22	1	1000	B30-R4300
▲	B33-151-490	White	B-490	F N H L	50.80	6.35	-	-	-	8.89	1	2500	B30-R4300
●	B33-276-461	White	B-461	F N A H S L	66.68	25.40	-	25.40	25.40	73.03	2	1500	B30-R4300
▷	B33-134-461	White	B-461	F N A H S L	88.90	38.10	-	31.75	38.10	41.28	1	1000	B30-R4300
8.0 ml													
●	B33-91-498	White	B-498	F	19.05	23.80	-	-	-	27.00	4	2500	B30-R6200
●	B33-88-498	White	B-498	F	25.40	19.05	-	-	-	22.23	2	2500	B30-R6200
●	B33-625-499	White	B-499	F N A	25.40	66.68	-	-	-	69.68	3	1500	B30-R6000
▲	B33-156-492	White	B-492	F N H L	48.26	25.40	-	-	-	27.94	1	1500	B30-R6400
▲	B33-156-490	White	B-490	F N H L	48.26	25.40	-	-	-	27.94	1	1500	B30-R4300
15.0 ml													
▲	B33-157-490	White	B-490	F N H L	55.88	38.10	-	-	-	41.28	1	1000	B30-R4300
●	B33-139-461	White	B-461	F N A H S L	133.35	25.40	-	38.10	25.40	136.42	2	650	B30-R4300
25.0 ml													
●	B33-87-498	White	B-498	F	12.70	36.50	-	-	-	39.70	6	2500	B30-R6200
●	B33-325-499	White	B-499	F N A	25.40	63.50	-	-	-	66.68	2	700	B30-R6000
50.0 ml													
▲	B33-254-498	White	B-498	F	19.05	19.05	-	-	-	21.59	1	1000	B30-R6200
●	B33-5-498	White	B-498	F	25.40	12.70	-	-	-	15.24	3	5000	B30-R6200
●	B33-89-498	White	B-498	F	25.40	36.50	-	-	-	39.70	3	2300	B30-R6200
●	B33-325-498	White	B-498	F	25.40	63.50	-	-	-	66.68	2	700	B30-R6200
●	B33-326-499	White	B-499	F N A	25.40	101.60	-	-	-	104.78	2	450	B30-R6000
●	B33-326-498	White	B-498	F	25.40	101.60	-	-	-	104.78	2	450	B30-R6200
●	B33-327-499	White	B-499	F N A	38.10	101.60	-	-	-	104.78	2	450	B30-R6000
●	B33-327-498	White	B-498	F	38.10	101.60	-	-	-	104.78	2	450	B30-R6200
●	B33-328-499	White	B-499	F N A	38.10	152.40	-	-	-	155.58	2	300	B30-R6000
●	B33-328-498	White	B-498	F	38.10	152.40	-	-	-	155.58	2	300	B30-R6200

F Freezer environment **N** Liquid nitrogen environment **A** Autoclave environment **H** Hot water bath (100°C) **S** Self-laminating label **L** Low-profile (extremely thin) label **R** Removable

B-461, B-490 & B-492 Centrifuge, eppendorf & PCR tube labels

Stays put in harsh conditions and resist common laboratory chemicals

- ▶ Thin construction that prevents jamming in centrifuges and racks
- ▶ Long and short tails styles provide window for viewing liquids level in tube
- ▶ B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- ▶ B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen





Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
0.5 ml												
▶	B33-614-461	White	B-461	F N A H S L	5.08	22.86	5.08	18.29	12.08	1	2000	B30-R4300
▶	B33-627-461	White	B-461	F N A H S L	6.35	27.94	6.35	22.09	11.35	1	1000	B30-R4300
●	B33-68-490	White	B-490	F N H L	12.70	19.05	-	-	22.23	4	2500	B30-R4300
●	B33-152-492	White	B-492	F N H L	25.40	9.53	-	-	12.07	2	2500	B30-R6400
▶	B33-122-461	White	B-461	F N A H S L	45.72	12.70	19.05	12.70	15.88	1	1500	B30-R4300
◆	B33-127-461	White	B-461	F N A H S L	55.88	12.70	19.05	12.70	61.60	3	1500	B30-R4300
1.5 ml												
▲	B33-154-490	White	B-490	F N H L	31.75	9.53	-	-	12.70	1	1500	B30-R4300
▶	B33-123-461	White	B-461	F N A H S L	45.72	9.53	19.05	9.53	15.24	1	1500	B30-R4300
▶	B33-153-461	White	B-461	F N A H S L	66.68	15.24	25.40	15.24	19.05	1	1500	B30-R4300
4.0 ml												
▲	B33-155-492	White	B-492	F N H L	41.28	15.24	-	-	17.78	1	1500	B30-R6400
▲	B33-155-490	White	B-490	F N H L	41.28	15.24	-	-	17.78	1	1500	B30-R4300

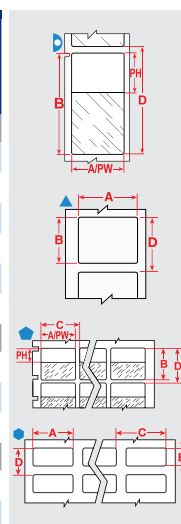


B-461, B-490, B-492 & B-499 Conical/Large tube labels

Use these labels for labelling larger tube sizes, while still providing the needed temperature and chemical resistance properties

- ▶ B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- ▶ B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen



Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
0.5 ml												
●	B33-68-499	White	B-499	F N A	12.70	19.05	-	-	21.59	4	1500	B30-R4300
▲	B33-620-499	White	B-499	F N A	12.70	25.40	-	-	28.40	1	1000	B30-R6000
▲	B33-125-499	White	B-499	F N A	22.86	12.70	-	-	15.24	1	1500	B30-R4300
●	B33-152-499	White	B-499	F N A	25.40	9.53	-	-	12.07	2	1500	B30-R4300
●	B33-152-492	White	B-492	F N H L	25.40	9.53	-	-	12.07	2	2500	B30-R6400
▲	B33-59-492	White	B-492	F N H L	25.40	12.70	-	-	15.24	1	2500	B30-R6400
●	B33-5-499	White	B-499	F N A	25.40	12.70	-	-	15.24	3	5000	B30-R6000
◆	B33-127-461	White	B-461	F N A H S L	55.88	12.70	19.05	12.70	61.60	3	1500	B30-R4300



>>

LABORATORY IDENTIFICATION




B-461, B-490, B-492 & B-499 Conical/Large tube labels (continued)

Use these labels for labelling larger tube sizes, while still providing the needed temperature and chemical resistance properties

Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
1.5 ml												
▲	B33-254-499	White	B-499	F N A	19.05	19.05	-	-	21.59	1	1000	B30-R6000
●	B33-91-499	White	B-499	F N A	19.05	23.80	-	-	26.97	4	2500	B30-R6000
●	B33-88-499	White	B-499	F N A	25.40	19.05	-	-	22.23	2	2500	B30-R6000
2.0 ml												
●	B33-628-461	White	B-461	F N A H S L	15.24	38.10	15.24	33.02	22.38	2	2500	B30-R4300
●	B33-612-461	White	B-461	F N A H S L	15.24	66.68	15.24	25.40	73.66	3	1500	B30-R4300
●	B33-629-461	White	B-461	F N A H S L	19.05	38.10	19.05	33.02	25.78	2	2500	B30-R4300
▲	B33-179-492	White	B-492	F N H L	25.40	25.40	-	-	27.94	1	1900	B30-R6400
4.0 ml												
●	B33-87-499	White	B-499	F N A	12.70	36.50	-	-	39.67	6	2500	B30-R6000
▷	B33-638-461	White	B-461	F N A H S L	15.24	48.26	15.24	39.88	22.24	1	2000	B30-R4300
●	B33-165-499	White	B-499	F N A	20.32	36.50	-	-	39.70	4	2500	B30-R4300
●	B33-621-499	White	B-499	F N A	25.40	36.50	-	-	39.50	3	3000	B30-R6000
●	B33-89-499	White	B-499	F N A	25.40	36.50	-	-	39.67	3	2300	B30-R6000
▷	B33-632-461	White	B-461	F N A H S L	34.93	45.72	34.93	39.88	41.93	1	1500	B30-R4300
▲	B33-136-499	White	B-499	F N A	38.10	19.05	-	-	22.23	1	1500	B30-R4300
▲	B33-155-492	White	B-492	F N H L	41.28	15.24	-	-	17.78	1	1500	B30-R6400
▲	B33-155-490	White	B-490	F N H L	41.28	15.24	-	-	17.78	1	1500	B30-R4300
●	B33-133-461	White	B-461	F N A H S L	41.28	15.24	25.40	15.24	46.99	3	1500	B30-R4300
▲	B33-151-490	White	B-490	F N H L	50.80	6.35	-	-	8.89	1	2500	B30-R4300
●	B33-276-461	White	B-461	F N A H S L	66.68	25.40	25.40	25.40	73.03	2	1500	B30-R4300
▷	B33-134-461	White	B-461	F N A H S L	88.90	38.10	31.75	38.10	41.28	1	1000	B30-R4300
8.0 ml												
●	B33-625-499	White	B-499	F N A	25.40	66.68	-	-	69.68	3	1500	B30-R6000
▲	B33-156-492	White	B-492	F N H L	48.26	25.40	-	-	27.94	1	1500	B30-R6400
▲	B33-636-461AW	White	B-461	F N A H L	48.26	25.40	48.26	-	37.40	1	2000	B30-R4300
▲	B33-137-499	White	B-499	F N A	50.80	25.40	-	-	28.58	1	1100	B30-R4300
15.0 ml												
●	B33-139-461	White	B-461	F N A H S L	133.35	25.40	38.10	25.40	136.42	2	650	B30-R4300
25.0 ml												
●	B33-325-499	White	B-499	F N A	25.40	63.50	-	-	66.68	2	700	B30-R6000
▲	B33-642-461AW	White	B-461	F N A H L	57.15	19.05	57.15	-	26.05	1	2000	B30-R4300
▲	B33-650-461AW	White	B-461	F N A H L	88.90	38.10	88.90	-	45.10	1	2000	B30-R4300
50.0 ml												
●	B33-326-499	White	B-499	F N A	25.40	101.60	-	-	104.78	2	450	B30-R6000
●	B33-327-499	White	B-499	F N A	38.10	101.60	-	-	104.78	2	450	B30-R6000
●	B33-328-499	White	B-499	F N A	38.10	152.40	-	-	155.58	2	300	B30-R6000
▲	B33-158-490	White	B-490	F N H L	95.25	38.10	-	-	41.28	1	1000	B30-R4300

* AW = All white / no transparent area

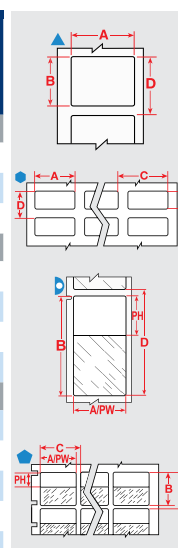

F Freezer environment **N** Liquid nitrogen environment **A** Autoclave environment **H** Hot water bath (100°C) **S** Self-laminating label **L** Low-profile (extremely thin) label **R** Removable



B-461, B-490, B-492 & B-499 Vial top labels

Identify the tops of your tubes with these circular labels, or use the combined vial and vial top labels

- ▶ B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- ▶ B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen.

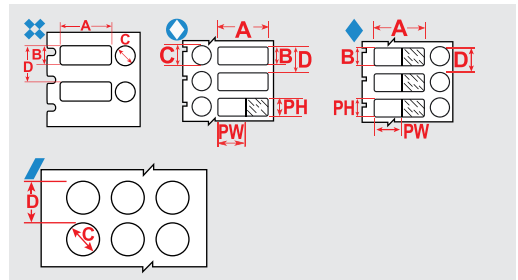


Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
0.5 ml													
❖	B33-126-499	White	B-499	F A	22.86	12.70	12.70	-	-	15.24	1	1500	B30-R4300
❖	B33-126-490	White	B-490	F H L	22.86	12.70	12.70	-	-	15.24	1	2500	B30-R4300
❖	B33-163-499	White	B-499	F A	25.40	9.53	9.53	-	-	12.70	1	1500	B30-R4300
❖	B33-163-492	White	B-492	F H L	25.40	9.53	9.53	-	-	12.70	1	1500	B30-R6400
◇	B33-606-461	White	B-461	F A H S L	25.40	9.53	9.53	25.40	9.53	16.53	1	1000	B30-R4300
❖	B33-182-492	White	B-492	F H L	25.40	12.70	11.18	-	-	15.24	1	1500	B30-R6400
1.5 ml													
/	B33-602-499	White	B-499	F A	-	-	9.53	-	-	16.50	3	3000	B30-R6000
/	B33-602-499YL	Yellow	B-499	F A	-	-	9.53	-	-	16.50	3	3000	B30-R6000
/	B33-602-461AW	White	B-461	F A H L	-	-	9.53	-	-	16.50	3	3000	B30-R4300
/	B33-143-499	White	B-499	F A	-	-	9.53	-	-	12.70	4	1500	B30-R4300
/	B33-143-492	White	B-492	F H L	-	-	9.53	-	-	12.70	4	1500	B30-R6400
2.0 ml													
/	B33-603-499	White	B-499	F A	-	-	12.70	-	-	15.70	3	3000	B30-R6000
/	B33-603-499YL	Yellow	B-499	F A	-	-	12.70	-	-	15.70	3	3000	B30-R6000
/	B33-144-499	White	B-499	F A	-	-	12.70	-	-	15.88	3	1500	B30-R4300
/	B33-144-492	White	B-492	F H L	-	-	12.70	-	-	15.88	3	1500	B30-R6400
/	B33-144-490	White	B-490	F H L	-	-	12.70	-	-	15.88	3	2500	B30-R4300
4.0 ml													
❖	B33-190-492	White	B-492	F H L	41.28	15.24	9.53	-	-	17.78	1	1500	B30-R6400
◇	B33-608-461	White	B-461	F A H S L	41.28	15.24	12.70	41.28	15.24	22.22	1	1000	B30-R4300
15.0 ml													
/	B33-604-461AW	White	B-461	F A H L	-	-	15.24	-	-	22.43	3	3000	B30-R4300

* AW = All white / no transparent area

LABORATORY IDENTIFICATION



B-7425 Polypropylene all purpose lab samples labels

- ▶ Offers excellent all-purpose sample traceability
- ▶ Stays attached to vials, tubes, slides and well plates
- ▶ Remains legible when exposed to chemicals and extreme temperatures




Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B33-53-7425	White	B-7425	F N A H	50.80	12.70	-	15.24	1	2000	B30-R4300
0.5 ml											
●	B33-152-7425	White	B-7425	F N A H	25.40	9.53	-	12.07	2	2000	B30-R4300
✦	B33-249-7425	White	B-7425	F N A H	25.40	9.53	9.53	12.70	1	1500	B30-R4300
▲	B33-59-7425	White	B-7425	F N A H	25.40	12.70	-	15.24	1	2000	B30-R4300
✦	B33-251-7425	White	B-7425	F N A H	25.40	12.70	11.18	15.24	1	1500	B30-R4300
1.5 ml											
●	B33-88-7425	White	B-7425	F N A H	25.40	19.05	-	22.23	2	2000	B30-R4300
2.0 ml											
▲	B33-257-7425	White	B-7425	F N A H	20.96	6.35	-	9.53	1	1500	B30-R4300
▲	B33-179-7425	White	B-7425	F N A H	25.40	25.40	-	27.94	1	1500	B30-R4300
▲	B33-256-7425	White	B-7425	F N A H	33.02	15.24	-	17.78	1	1500	B30-R4300
4.0 ml											
●	B33-37-7425	White	B-7425	F N A H	38.10	12.70	-	15.24	2	1500	B30-R4300
▲	B33-136-7425	White	B-7425	F N A H	38.10	19.05	-	22.23	1	1500	B30-R4300
▲	B33-235-7425	White	B-7425	F N A H	38.10	25.40	-	27.94	1	1250	B30-R4300
▲	B33-258-7425	White	B-7425	F N A H	38.10	44.45	-	47.63	1	900	B30-R4300
▲	B33-151-7425	White	B-7425	F N A H	50.80	6.35	-	8.89	1	2000	B30-R4300
8.0 ml											
▲	B33-137-7425	White	B-7425	F N A H	50.80	25.40	-	28.58	1	1500	B30-R4300




B-7425-AC Sterilisation indicating labels

Label confirms successful sterilisation



Diagram	Order Reference	Colour	Material	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B33-235-7425-AC	White	B-7425	38.10	25.40	19.05	27.94	1250	B30-R4300
▲	B33-137-7425-AC	White	B-7425	50.80	25.40	19.05	27.94	1500	B30-R4300



F Freezer environment **N** Liquid nitrogen environment **A** Autoclave environment **H** Hot water bath (100°C) **S** Self-laminating label **L** Low-profile (extremely thin) label **R** Removable

B-488 Well plate labels

Our well plate labels guarantee crystal clear text and barcoding for most laboratory environments

► Chemically-resistant polyester made to fit common well plate sizes




Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
●	B33-616-488	White	B-488	F A	22.86	19.05	22.05	3	3000	B30-R4300
●	B33-617-488	White	B-488	F A	22.86	22.86	25.86	3	3000	B30-R4300
▲	B33-635-488	White	B-488	F A	48.26	6.35	11.35	1	2000	B30-R4300

B-498 Re-Identify Tissue Cassettes Labels

Tissue cassettes are often re-identified when labs collect samples from various biorepositories. Typically, each laboratory has its own unique way of identifying samples, which creates a need to re-identify samples in a common way. The B-498 labels can be applied directly onto the cassettes, on pure paraffin wax and on top of another label or identifier.




Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
●	B33-1-498	White	B-498	F	19.05	6.35	8.89	4	5000	B30-R6200
▲	B33-254-498	White	B-498	F	19.05	19.05	21.59	1	1000	B30-R6200

B-481 & B-488 Slide labels

Designed to provide crisp and clear sample identification throughout the sample generation, inspection and storage process

► Resistant to xylene, alcohol and DMSO




Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B33-195-481	White	B-481	F H	22.86	9.53	12.70	1	3000	B30-R6400
●	B33-616-488	White	B-488	F A	22.86	19.05	22.05	3	3000	B30-R4300
▲	B33-194-481	White	B-481	F H	22.86	19.05	22.23	1	2000	B30-R6400
●	B33-617-488	White	B-488	F A	22.86	22.86	25.86	3	3000	B30-R4300
●	B33-141-481	White	B-481	F H	22.86	22.86	25.40	2	1500	B30-R6400
▲	B33-635-488	White	B-488	F A	48.26	6.35	11.35	1	2000	B30-R4300

LABORATORY IDENTIFICATION



B-427 Straw labelling

These self-laminating labels protect the printed information for lasting identification

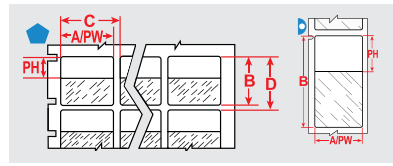


Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
0.3 ml												
◆	B33-116-427	White	B-427	F N S	25.40	25.40	25.40	9.53	28.58	2	2500	B30-R4300
◆	B33-211-427	White	B-427	F N S	25.40	25.40	25.40	9.65	32.13	3	3000	B30-R4300
◆	B33-117-427	White	B-427	F N S	25.40	31.75	25.40	12.70	34.93	2	2000	B30-R4300
◆	B33-121-427	White	B-427	F N S	44.45	38.10	44.45	12.70	44.45	1	1000	B30-R4300
0.5 ml												
◆	B33-511-427	White	B-427	F N S	25.40	63.50	25.40	19.05	70.64	3	1500	B30-R4300



B-488 Bottles, flasks, dishes and general identification

Used to identify a variety of common laboratory glassware items and other consumables

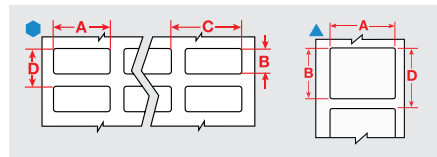


Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
◆	B33-616-488	White	B-488	F A	22.86	19.05	22.05	3	3000	B30-R4300
◆	B33-617-488	White	B-488	F A	22.86	22.86	25.86	3	3000	B30-R4300
▲	B33-635-488	White	B-488	F A	48.26	6.35	11.35	1	2000	B30-R4300



B-403 Water dissolvable label

The label dissolves within 30 seconds exposure to water




Diagram	Order Reference	Colour	Material	Special Properties	Label Width A (mm)	Label Length B (m)	Printer Ribbon Series
∞	B30C-1125-403-WT	White	B-403	R	28.58	30.48	B30-R4300
∞	B30C-2250-403-WT	White	B-403	R	57.15	30.48	B30-R4300
∞	B30C-3000-403-WT	White	B-403	R	76.20	30.48	B30-R4300
∞	B30C-4000-403-WT	White	B-403	R	101.60	30.48	B30-R4300

F Freezer environment **N** Liquid nitrogen environment **A** Autoclave environment **H** Hot water bath (100°C) **S** Self-laminating label **L** Low-profile (extremely thin) label **R** Removable

MASTER MATERIAL INDEX

This section provides a quick reference to Brady materials listed throughout this catalogue, including basic attributes, applications and regulatory compliance where applicable. For more detailed material attribute and performance information, please refer to the material's Technical Data Sheet, listed at www.bradyeurope.com/tds.

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-342	Heat-shrink Polyolefin	Matt	White	-55 °C	130.6 °C	3:1 ratio heat shrinkable wire marking sleeve that fits snugly around wires for identification and protection. Fade-resistant and flame retardant. Also available in yellow and black.	UL Recognised to UL224, SAE-AMS-DTL-23053/5 C (Class 1), SAE AS-81531
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride	Matt	White	-70 °C	130.6 °C	2:1 ratio heat shrinkable wire marking sleeve specifically designed for high temperature and low vacuum outgassing applications. These heat shrinkable wire marking sleeves are made from irradiated high temperature PVDF. Also available in black.	NASA SP-R-0022A Outgassing Performance, SAE-AMS-DTL-23053/18 (Class 2), SAE AS-81531, MIL-STD-202G Method 215K
B-348	Polyolefin	Matt	White	-55 °C	105 °C	Brady's B-348 High Performance material complies with the minimal smoke and halogen emission requirements of the most stringent underground standards for high-performance vehicles. The material is printable on-site and in the field, making it a practical solution for identifying thick cables and cable bundles. B-348 has proven to be highly durable, exhibiting excellent UV resistance. Available in white and yellow colours.	EN-45545-2, requirement 24, Vehicle Category HL3
B-403	Paper	Matt	Black on White	-70 °C	100 °C	White dissolvable paper. Dissolves completely in water leaving no adhesive residue, ideal for temporary labelling applications	
B-413	Metallic, Non-metal Polyester	Satin	Light Grey	-70 °C	110 °C	Thermal transfer printable polyester material with metallic-looking finish (non-metallised). Ideal for barcoded asset tracking and rating plate applications.	UL Recognised, cUL Recognised
B-417	Self-laminating Vinyl	Matt	White	-40 °C	70 °C	Keep your wire identification secure with this self-laminating marker with extra-strong adhesive. The extra-strong adhesive makes these markers ideal for small-diameter wires. Features a white printable area and a clear tail that wraps around the marker.	UL Recognised to UL969 Labelling and Marking Standard when printed with the Brady Series R4300 and R7950 ribbons. See UL files MH62024 for specific details. Brady customers should specify at purchase if they require UL Recognised B-417 labels. Brady sells both UL Recognised B-417 labels and non-approved labels depending on customer requirements
B-422	Polyester	Gloss	White	-40 °C	100 °C	White material stock with glossy finish and 2 mils of adhesive for rough surface applications, including low surface energy plastics. Designed to withstand solvent exposure. UL rated for surfaces commonly used in solar panel manufacturing. Also used for component identification, barcoding, asset and inventory tracking.	UL Recognised, CSA Accepted
B-423	Polyester	Gloss	White	-70 °C	110 °C	White polyester thermal transfer printable material with a glossy finish. Widely used for component identification, barcoding, asset and inventory tracking. UL rated for surfaces commonly used in solar panel manufacturing.	UL Recognised, CSA Accepted, Halogen Free (DIN VDE 0472/part 815) Approvals are for White material only
B-424	Paper	Matt	White	-40 °C	50 °C	White paper material with matt finish and smooth top coat finish for thermal transfer printing. Good contrast and smear resistance for thermal barcode printing. Used for general purpose labelling applications	
B-425A	Polypropylene	Matt	White	-70 °C	80 °C	White polypropylene material stock with matt finish for thermal transfer printing or write-on applications. Excellent solvent resistance and print performance; not recommended for long-term outdoor use.	UL Recognised, CSA Accepted, Halogen Free (DIN VDE 0472/part 815)

>>

MASTER MATERIAL INDEX

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-427	Self-laminating Vinyl	Matt	White	-40 °C	60 °C	Thermal transfer printable, self-laminating material. These labels have a printable area with a clear "tail" that wraps around the marker. The "tail" serves as overlaminate to protect the print. Superior resistance to abrasion, solvents, water, oil and dirt. Also available in grey, brown, green, yellow, blue, red, purple, orange.	UL Recognised to UL969 Labelling and Marking Standard when printed with the Brady Series R4300 and R6200 ribbons. See UL files MH17154 for specific details. Brady customers should specify at purchase if they require UL Recognised B-427 labels. Brady sells both UL Recognised B-427 labels and non-approved labels depending on customer requirements.
B-428	Metallised Polyester	Matt	Light Grey	-70 °C	120 °C	Thermal transfer printable metallised polyester with matt finish. Withstands solvents and variable temperatures. Excellent for serial and rating plate applications with name-plate quality and a metal-looking finish.	UL Recognised, CSA Accepted, AGA Approved, Halogen Free (DIN VDE 0472/ part 815)
B-428/B-966B	Metallised Polyester with Polyester Overlaminate	Gloss	Light Grey	-70 °C	120 °C	A Metallised polyester label that comes with a separate overlaminate to be applied over the label once printed. This way the label remains clear and easy-to-read, even in harsh environments. Overlaminate is a clear polyester (B-966B) that extends outside of label on each side when applied.	
B-430	Polyester	Gloss	Transparent	-70 °C	100 °C	Translucent, high performance polyester material with a glossy finish. Thermal transfer printable.	UL Recognised, CSA Accepted
B-432	Polyester	Gloss	Transparent	-40 °C	100 °C	Translucent, high performance polyester material with a glossy finish. Thermal transfer printable. Very similar to B-430, but has a thicker layer of acrylic adhesive for better adherence to rough surface applications.	UL Recognised, CSA Accepted
B-434A	Metallised Polyester	Gloss	Silver	-40 °C	90 °C	Metallised polyester with a glossy finish and a thicker layer of adhesive for better adherence to rough surface applications. Withstands numerous solvents while maintaining excellent image quality.	UL Recognised, CSA Accepted
B-435A	Metallised Polyester	Gloss	Silver	-40 °C	90 °C	Printable metallised polyester withstands numerous solvents and variable temperatures. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.	UL Recognised, CSA Accepted
B-437	Polyvinylfluoride	Matt	White	-70 °C	135 °C	Polyvinylfluoride label material with matt finish. Used in wire and cable identification applications where self-extinguishing features are required. This label material utilises an adhesive for heavy-duty applications and is available in continuous or die-cut formats. Excellent resistance to water, oil and other common fluids. Also available in yellow.	MIL-M-87958 Pressure Sensitive Adhesive Wire or Cable Marker and Identification specification
B-438	Tamper-evident Metallised Polyester	Matt	Silver	-40 °C	40 °C	Metallised polyester material with matt finish. Leaves a checkerboard footprint on the surface when removed; the pattern also appears on the top of the label to prevent it from being reused.	UL Recognised, CSA Accepted
B-439	Vinyl	Gloss	Green	-70 °C	40 °C	Available in Blue, Green, Orange, Red, White and Yellow	
B-461	Self-laminating Polyester	Matt	White, Transparent	-196 °C	110 °C	Permanent adhesive; suitable for liquid nitrogen application if material is wrapped around itself, as in self-lamination; write-on capabilities. Temperature range increases to 121°C when used in autoclave process	
B-472	Polyimide	Matt	White	-70 °C	100 °C	Cable and wire bundle applications and label applications where self-extinguishing properties are required	
B-480A	Metallic, Non-metal Polyester	Satin	Silver	-70 °C	110 °C	Thermal transfer printable polyester material with metallic-looking finish (non-metallised) and aggressive adhesive for powder coats or rough surface applications. Ideal for barcoded asset tracking and rating plate applications.	UL Recognised, cUL Recognised
B-481	StainerBondz™ Polyester	Matt	White	-80 °C	130 °C	White polyester will remain resistant when exposed to xylene and other chemicals that are commonly used in the slide staining process	

>>

MASTER MATERIAL INDEX

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-482	Polyester	Matt	White			The B-482 label material, combined with Brady's R6400 ribbon, provides the durability and print quality that histology and anatomic pathology labs need for accurate, identifiable specimen labelling. Paraffin and solvent resistant.	
B-483A	Polyester	Gloss	White	-40 °C	120 °C	White polyester thermal transfer printable material with glossy finish and aggressive adhesive specifically designed for powder coated surfaces.	UL Recognised, CSA Accepted
B-484A	Polyester	Gloss	White	-40 °C	120 °C	White polyester thermal transfer printable material, similar to B-483, but with thinner construction for curved or angled surfaces. Offers aggressive adhesive for adhesion to textured metals and low surface energy plastics.	UL Recognised
B-486B	Metallised Polyester	Matt	Light Grey	-40 °C	120 °C	Thermal transfer printable metallised polyester material. Designed for high adhesion to textured metals, powder coated surfaces and low surface energy plastics.	UL Recognised, CSA Accepted
B-488	Polyester	Matt	White	-40 °C	145 °C	White polyester thermal transfer printable material, similar to B-423, but with matt finish. Widely used for component identification, barcoding, asset and inventory tracking.	
B-489A	Polyester	Matt	White	-40 °C	120 °C	White polyester thermal transfer printable material, similar to B-483, but with matt finish. Aggressive adhesive specifically designed for powder coated surfaces.	UL Recognised, CSA Accepted
B-490	FreezerBondz™ Polyester	Matt	White	-196 °C	130 °C	Can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen, except for Vial Tops. Material must slightly overlap itself.	
B-492	FreezerBondz™ Polyester	Matt	White	-196 °C	110 °C	Ultra thin; can label frosted/frozen (with overlap) or room temperature labels and lasts in liquid nitrogen and hot water baths	
B-498	Vinyl Cloth	Semi-gloss	White	-40 °C	80 °C	White vinyl cloth label material with glossy finish. The adhesive and cloth backing give excellent holding power, while being repositionable and removing cleanly.	UL Recognised
B-499	Nylon Cloth	Matt	Black on White	-40 °C	90 °C	Nylon cloth material with matt finish. The adhesive allows labelling in environments with heat, cold, oil and dirt. Also available in yellow.	UL Recognised, CSA Accepted, Halogen Free (DIN VDE 0472/part 815) Approvals are for White material only
B-509	Magnetic Polyester	Matt	White	-18 °C	70 °C	Magnetic Back Polyester is used for temporary, reusable and movable signs	
B-526	Phosphorescent Polyester	Gloss	Photoluminescent Green	-40 °C	60 °C	BradyGlo™ High Intensity laminate is designed to provide high adhesion and luminance for egress marking in low light areas in and along stairwells of public buildings, exit and directional signs, identification of fire alarms and extinguishers, low location egress pathway markings, and directional systems for escape or evacuation routes.	New York Local Law 26 RS 6-1 & 6-1A, City of New York, Department of Buildings MEA No. 467-06-M UV: 46-9-7
B-549	Polyester	Gloss	White	-40 °C	100 °C	Flexible, dimensionally stable, low temperature, pressure sensitive adhesive tape for permanent application. Adhesive can be applied at temperatures down to -10°F (-23°C).	
B-551	Polyester	Matt	White	-40 °C	89 °C	Tag material used for marking on-the-spot warning of dangerous conditions	Complies to OSHA 1910.145(f) when printed with required signal word and major message.
B-565	Metallised Polyester	Matt	Silver	-40 °C	110 °C	Designed for applications like identification labels or rating and serial plates that utilise barcodes, alphanumerics, graphic symbols and logos and require nameplate-like quality	
B-569	Polyester	Gloss	Green	-40 °C	100 °C	Designed for use on stainless steel pipes in harsh environments such as the Pulp and Paper Industry	
B-581	Vinyl	Gloss	White	-40 °C	82 °C	Only indoor use, where frequent repositioning is required	
B-584	Reflective Tape	Gloss	Orange	-40 °C	70 °C	Suitable for outdoor use. Also available in silver and yellow.	

>>

MASTER MATERIAL INDEX

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-593	Polyester	Gloss	White	-20 °C	100 °C	EPREP (Engraved Panel REPlacement labels) are designed for patch panel identification in identifying external push-buttons, switches and internal connection points. Also available in black, green, red, silver and yellow.	UL Recognised, cUL Recognised
B-595	Vinyl	Gloss	White	-40 °C	82 °C	Durable, low-shrink vinyl with our most aggressive adhesive. Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces). Adheres to "difficult" low-surface energy items (PVC piping, blow-moulded equipment cases, ABS plastics, recycled plastics). Available in a wide range of colours.	BS 5609:1986 Section 2 and section 3
B-618	Polyester	Matt	White	-70 °C	120 °C	Ideal for rating plate applications and general-purpose labelling with high-quality barcodes and graphics. Film contains recycled PET.	UL Recognised, cUL Recognised
B-719	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals. Surface resistivity values in the recommended range for dissipative ESD packing materials.	UL Recognised, ANSI/ESD S541-2008 (between 10 and 10 ohms) for dissipative ESD packaging materials, MIL-STD-202G Method 215K
B-724	Polyimide	Matt	Amber	-70 °C	300 °C	Amber polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	MIL-STD-202G, Notice 12, Method 215K, SAE AS81531 Marking of Electrical Insulating Material
B-728	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised, MIL-STD-202G, Notice 12, Method 215K
B-729	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material, low profile (1 mil thickness), with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised, MIL-STD-202G, Notice 12, Method 215K
B-7425	Polypropylene	Matt	Black on White	-80 °C	70 °C	White Polypropylene material. Ideal for laboratory identification such as vials, centrifuge tubes and test tubes. For freezer or liquid nitrogen applications, B-7425 must be applied prior to being frozen.	
B-7563	Metallised Polyester	Satin	Silver	-40 °C	135 °C	Thermal transfer printable metallised polyester withstands numerous solvents and variable temperatures. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.	UL Recognised
B-7569	Vinyl	Gloss	White	-20 °C	75 °C	Used for Pipe Markers, Arrow Tape, Warehouse Marking, Floor Marking, Warning Panels, Safety Signs and Hazardous Substance Identification. Available in a wide range of colours.	BS 5609:1986 Section 2 and section 3
B-7597	Polyethylene	Matt	White	-40 °C	100 °C	Polyethylene tag material. Resists tearing and the topcoat resists smudging and abrasion. Halogen free material.	Halogen Free (DIN VDE 0472/part 815)
B-7598	Polyester	Gloss	White, Yellow, Red, Green, Silver, Black, Blue	-40 °C	100 °C	A general identification polyester tag for cables exposed to extreme conditions. Up to 10 years outdoor durability. Also available in black, blue, green, red, silver and yellow.	Parts supplied in White, Black or Silver are Halogen Free as per IEC 61249-2-21 (2003-11)
B-7599	Polyethylene	Matt	Yellow	-40 °C	50 °C	White polyethylene tag material. Rapido™ Wiremarking Sleeves are fast and easy to apply. Simply squeeze the edges of the material together, thread your wire through the holes and pull away the wire to release the marker.	

>>

MASTER MATERIAL INDEX

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-7641	Heat-shrink Polyolefin	Matt	White	-55 °C	105 °C	2:1 ratio heat shrinkable, zero halogen wire marking sleeves. The wire marking sleeves offer outstanding fire safety properties and minimal smoke emission. Also available in yellow.	BS-6853 (1999) Vehicle Category 1A; EN-45545-2, requirement 24, Vehicle Category HL3, Zero Halogen
B-7642	Heat-shrink Polyolefin	Matt	White	-40 °C	120 °C	2:1 ratio heat shrinkable wire marking sleeves. The sleeves are high-temperature rated, highly flame retardant, and very flexible.	
B-7643	Thermoplastic Polyether Polyurethane	Matt	White, Yellow	-40 °C	90 °C	Thermal transfer and dot matrix printable wire and cable bundle tag for harsh environments. Low halogen material. Also available in black, orange, red and yellow.	Halogen requirements of IEC 61249-2-21 (2003-11)
B-767	Static Dissipative Polyimide	Gloss	White	-80 °C	300 °C	The high performance B-767 material is ideal for PCB and electronic component manufacturing, this material is static dissipative and survive extreme processes like wave soldering and multiple harsh washes.	UL Recognised, ANSI/ESD S541-2008 (between 10 and 10 ohms) for dissipative ESD packaging materials, MIL-STD-202G Method 215K
B-768	Static Dissipative Polyimide	Gloss	White	-80 °C	300 °C	The high performance ultra-thin B-768 material is ideal for PCB and electronic component manufacturing, this material is static dissipative and survive extreme processes like wave soldering and multiple harsh washes.	UL Recognised, ANSI/ESD S541-2008 (between 10 and 10 ohms) for dissipative ESD packaging materials, MIL-STD-202G Method 215K
B-7696	Vinyl	Gloss	White, Yellow	-40 °C	70 °C	Brady DuraSleeve® printable inserts create a durable legend. The rigid construction of the DuraSleeve wire marking system provides inserts that can easily be inserted into a clean carrier. The legend can be changed before or after termination. Also available in yellow.	UL94 V0
B-777	Polyimide	Gloss	White	-70 °C	300 °C	The B-777 Ultratemp label for harsh washing processes works seamlessly with the BSP™61 Print and Apply System, the ALF Label Feeder and other auto-apply systems. Together they provide a reliable and flexible on-site traceability solution for high heat applications in manufacturing.	UL Recognised to UL969 Labelling and Marking Standard when printed with Brady Series R6300 ribbon. See UL file MH25991 for specific details.
B-787	Polyvinylfluoride	Gloss	White	-70 °C	100 °C	White polyvinyl fluoride material. Used in wire and cable identification applications where self-extinguishing properties are required.	Boeing BMS 10-26 Type I, Grade A, Meets the colour requirements of FED-STD-595C Colour 17875 White
B-797	Polyimide	Gloss	White	-80 °C	300 °C	B-797 is a high performance material for PCB and electronic component manufacturing, that is engineered to survive extreme processes like wave soldering and multiple harsh washes.	UL Recognised, MIL-STD-202G, Notice 12, Method 215K, Dibutyltin and Dioctyltin free
B-8423	Polyester	Satin	White	-70 °C	110 °C	Polyester material with satin finish, economical alternative to B-423. Used for component identification, barcoding, asset and inventory tracking. Also available in yellow.	
B-854	Metal Detectable Polyester	Matt	White	-40 °C	110 °C	Tough against harsh washdown environments; metal detectable. Also available in yellow.	
B-855	Polyester	Matt	White	-40 °C	110 °C	Tough against harsh washdown environments. Also available in yellow.	
B-8591	Polymer	Gloss	White	-70 °C	110 °C	B-8591 toughest outdoor label is suited for smooth, textured/rough or highly textured/low energy surfaces.	



Need more information? View the technical data sheets Brady offers online access to technical data sheets for all Brady materials. View by a specific B-Number or search by relevant keywords. Visit www.bradyeurope.com/tds or click the QR code.

LABEL CREATION

for how you work best



Brady Workstation Labelling Software

Get everything you need to create the right label fast. Whether you are designing complex sequences or simple facility signs, Brady Workstation streamlines the process from start to finish.



Driverless & Automated

Skip the driver installations. With auto-label setup and printer detection, you can start typing and printing immediately.



Compliance & Safety

Purpose-built apps allow you to design CLP-chemical labels, print lockout/tagout procedures, and create professional facility signs.



Custom Design & Control

Create custom templates, lock specific elements for consistency, and easily set up complex label sequences or data imports.



Specialised ID

From text-only cable wraps to high-volume asset identification, choose the specific suite that fits your facility's needs.



Design & Print Essentials

Design & Print Essentials includes everything you need to create and print basic labels, signs, and templates. Design from scratch or utilise tools such as premade layouts and data import functionality to save time.

Available as a free download



Download app



Design & Print Pro

Design & Print Pro is your all-in-one solution for creating safety, facility, product, wire, and laboratory labels and signs. Take advantage of purpose-built design tools to simplify common labelling needs. Effortlessly design and print custom safety signs, facility labels, and pipemarkers to enhance workplace safety. Create product and wire identification labels with text, graphics, serialisation, and data imports. Ensure lab samples and equipment are clearly labeled with labels for vials, tubes, slides, and more. Simplify labelling, maintain compliance, and keep your facility organised—all with one comprehensive suite.



Download app

Article No.	Order Reference	Description
178761	BWS-DPP	Brady Workstation Design and Print Pro

BRADYPRINTER I3300 SPECIFICATIONS

PRINTER	
Description	i3300 Industrial Label Printer
Includes	This i3300 printer comes in a cardboard box. It ships with a power cord, a Brady Workstation Suite, a USB cable, a product CD holding the manual, a cleaning kit and a printed quick start guide
Applications	Asset tracking, Barcode labelling, Circuit board labelling, Component and equipment labelling, Data and telecommunications labelling, Electrical labelling, Facility identification, General identification, Hazard communication identification, Inventory and inspection labelling, Laboratory labelling, Lean and 5S labelling, Pipe and valve marking, Warehouse marking, Wire and cable labelling
Print Resolution (dpi)	300 dpi
Print Speed (mm/sec)	101.60 mm/s
Stand-alone Printing (Detached from PC)	Peripheral
Internal Memory Capacity	512 MB RAM, 195 MB IFFS Flash
Colour Capability	Monocolour
Language Support	Bulgarian, Chinese (Simplified), Chinese (Traditional), Croatian, Czech, Danish, Dutch, English (US), Estonian, Finnish, French (Canada), French, German, Hungarian, Italian, Korean, Norwegian (Bokmål), Polish, Portuguese (Brazil), Portuguese, Romanian, Russian, Spanish (Mexico), Spanish, Swedish, Thai, Turkish
Weight (kg)	5.22 kg
Width x Height x Depth (mm)	228.60 x 241.30 x 304.80
Calibration	No
Operating Temperature	10°C - 40°C
Operating Humidity	10%-85% (RH non-condensing)
Storage Temperature	-20°C - 50°C
Storage Humidity	15%-90% (RH non-condensing)
Warranty	1 year
MEDIA	
Continuous vs Die-cut Labels	Continuous Die-cut Custom
Compatible Media	B30-, B30C-, B30EP-, B33-, B33C-, B33D-, B33FP-, B33FT-, B33R-
Custom Labels	Yes
Number of Stock Parts	800+ standard parts
Materials Supported	FreezerBondz™ Polyester, Heat-shrink Polyolefin, High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve, Magnetic Polyester, Metal-detectable Polyester, Metallic, Non-metal Polyester, Metallised Polyester, Metallised Polyester with Polyester Overlamine, Nylon Cloth, Paper, Phosphorescent Polyester, Polyester, Polyester with Polyester Overlamine, Polyimide, Polyolefin, Polypropylene, Polyvinylfluoride, Reflective Tape, Self-laminating Polyester, Self-laminating Vinyl, StainerBondz™ Polyester, Static Dissipative Polyester, Tamper-evident Metallised Polyester, Vinyl, Vinyl Cloth
Max. Label Width (mm)	107.95
Min. Label Height (mm)	6.35
Min. Label Width (mm)	6.35
Max. Liner Width (mm)	107.95
Min. Liner Width (mm)	18.03
Max. Print Width (mm)	101.98
Recommended Usage per Day	3000

POWER SUPPLY	
Power Supply	AC Adaptor
Power Supply Voltage	100 - 240 V @ 50 - 60 Hz
DISPLAY	
Display	Colour LCD Touchscreen
Display Resolution	320 x 240 pixels
On Screen Indicators	Supply Remaining, Ribbon Remaining, Ribbon and label part number recognition, WiFi, Ethernet Status, Error Messaging, Data Reception
SOFTWARE & CONNECTIVITY	
Connectivity Options	Ethernet, USB, Wi-Fi
Software Compatibility	Brady Workstation, Windows based driver for 3rd party software use
Programming Language	BPL (Brady Programming Language)
FONTS/GRAPHICS/SYMBOLOGIES	
Built-in Fonts	Arial, Courier New, Times New Roman, Trebuchet MS, Verdana,Tahoma
Bar Code Type	Code 128A, Code 128B, Code 128C, Code 39, Code 93, EAN-13, EAN-8, HIBC, Interleaved 2 of 5, Interleaved 2 of 5 with check digit, JAN-13, JAN-8, UPC-A, Aztec, Data Matrix, MicroPDF417, PDF417, QR code
COMPLIANCE	
Approval/Compliance	UL, cUL, CE, RoHS, RCM, KCC, EAC



▶ Learn more about the BradyPrinter i3300 on : bradyeurope.com/i3300





Belgium & Luxembourg

+32 (0) 52 45 78 11
benelux@bradycorp.com

Czech Republic

+420 776 302 229
czechrepublic@bradycorp.com

Denmark

+45 66 14 44 00
denmark@bradycorp.com

France

+33 (0) 3 20 76 94 48
france@bradycorp.com

Germany, Austria & Switzerland

+49 (0) 6103 7598 660
germany@bradycorp.com

Hungary

+36 23 500 275
hungary@bradycorp.com

Italy

+39 02 26 00 00 22
italy@bradycorp.com

Netherlands

+31 (0)70 323 62 98
benelux@bradycorp.com

Norway

+47 70 13 40 00
norway@bradycorp.com

Poland

+48 22 104 6262
poland@bradycorp.com

Qatar, Saudi Arabia & UAE

+971 4881 2524
me@bradycorp.com

Slovakia

+421 902 939 406
slovakia@bradycorp.com

South Africa

+27 11 704 3295
africa@bradycorp.com

Spain & Portugal

+34 900 902 993
spain@bradycorp.com
portugal@bradycorp.com

**Sweden, Finland, Estonia, Latvia,
Lithuania**

+46 (0) 8 590 057 30
sweden@bradycorp.com

Turkey

+90 212 264 02 20
turkey@bradycorp.com

UK & Ireland

+44 (0) 1295 228 288
uk@bradycorp.com

We make products that make the world a safer and smarter place. From the depths of the ocean to outer space, from the factory floor to the delivery room - **we're just about everywhere you look.**



To help minimise our impact on the environment, Brady limits its number of reprints.

Updated versions are always available for download on bradyeurope.com/downloads.



Search for: EUR-M-055-EN



Y4822185

Your distributor