



Analog monitoring relay Fill level monitoring Resistance monitoring from 2 to 200 kohm Overshoot and undershoot 24 to 240 V AC/DC 50 to 60 Hz DC and AC 2-step or 1-step control Tripping delay 0.5 to 10 s 1 change-over contact spring-type connection system

product brand name	SIRIUS
product designation	Level monitoring relay with analog setting
product type designation	3UG4
manufacturer's article number of the optional sensor	2-pole and 3-pole sensors 3UG3207
General technical data	
product function	Monitoring relay for level monitoring
display version LED	Yes
<ul style="list-style-type: none"> • Apparent power consumption at DC <ul style="list-style-type: none"> — at 24 V maximum — at 240 V maximum • apparent power consumption at AC <ul style="list-style-type: none"> — at 24 V maximum — at 240 V maximum 	2 VA 4 VA 2 VA 4 VA
insulation voltage	300 V
<ul style="list-style-type: none"> • for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value 	
degree of pollution	3
type of voltage	AC/DC
<ul style="list-style-type: none"> • of the control supply voltage 	
surge voltage resistance rated value	4 kV
protection class IP	IP20
shock resistance according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
vibration resistance according to IEC 60068-2-6	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
reference code according to IEC 81346-2	K
relative repeat accuracy	1 %
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 Dicyclohexylphthalat (DCHP) - 84-61-7
Product Function	
product function	
<ul style="list-style-type: none"> • outlet monitoring adjustable • adjustable responsiveness • inlet monitoring adjustable • external reset 	Yes Yes Yes Yes
Control circuit/ Control	
control supply voltage at AC	

<ul style="list-style-type: none"> at 50 Hz rated value at 60 Hz rated value 	24 ... 240 V
control supply voltage at DC	
<ul style="list-style-type: none"> rated value 	24 ... 240 V
operating range factor control supply voltage rated value at DC	
<ul style="list-style-type: none"> initial value full-scale value 	0.85 1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
<ul style="list-style-type: none"> initial value full-scale value 	0.85 1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
<ul style="list-style-type: none"> initial value full-scale value 	0.85 1.1
Measuring circuit	
adjustable response delay time	
<ul style="list-style-type: none"> when starting with lower or upper limit violation 	0.5 ... 10 s 0.5 ... 10 s
buffering time in the event of power failure minimum	200 ms
physical measuring principle	conductive
Precision	
relative metering precision	20 %
temperature drift per °C	1 %/°C
Auxiliary circuit	
number of NC contacts delayed switching	0
number of NO contacts delayed switching	0
number of CO contacts	
<ul style="list-style-type: none"> delayed switching 	1
operating frequency with 3RT2 contactor maximum	5 000 1/h
ampacity of the output relay at AC-15	
<ul style="list-style-type: none"> at 250 V at 50/60 Hz at 400 V at 50/60 Hz 	3 A 3 A
ampacity of the output relay at DC-13	
<ul style="list-style-type: none"> at 24 V at 125 V at 250 V 	1 A 0.2 A 0.1 A
operational current at 17 V minimum	5 mA
continuous current of the DIAZED fuse link of the output relay	4 A
Electromagnetic compatibility	
conducted interference	
<ul style="list-style-type: none"> due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 	2 kV 2 kV 1 kV
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Galvanic isolation	
galvanic isolation	
<ul style="list-style-type: none"> between input and output between the outputs 	Yes No
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	spring-loaded terminals
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> solid finely stranded with core end processing finely stranded without core end processing for AWG cables solid 	2x (0.25 ... 1.5 mm ²) 2 x (0.25 ... 1.5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (24 ... 16)

• for AWG cables stranded	2x (24 ... 16)
connectable conductor cross-section	
• solid	0.25 ... 1.5 mm ²
• finely stranded with core end processing	0.25 ... 1.5 mm ²
• finely stranded without core end processing	0.25 ... 1.5 mm ²
AWG number as coded connectable conductor cross section	
• solid	24 ... 16
• stranded	24 ... 16
tightening torque with screw-type terminals	0.8 ... 1.2 N·m

Installation/ mounting/ dimensions

mounting position	any
fastening method	screw and snap-on mounting
height	94 mm
width	22.5 mm
depth	91 mm
required spacing	
• with side-by-side mounting	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— at the side	0 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm

Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
---------------------------------	------------	----------------------------------

[Confirmation](#)



Declaration of Conformity	Test Certificates	Marine / Shipping	other
----------------------------------	--------------------------	--------------------------	--------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



[Confirmation](#)

Railway

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4501-2AW30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4501-2AW30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UG4501-2AW30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4501-2AW30&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4501-2AW30/manual>

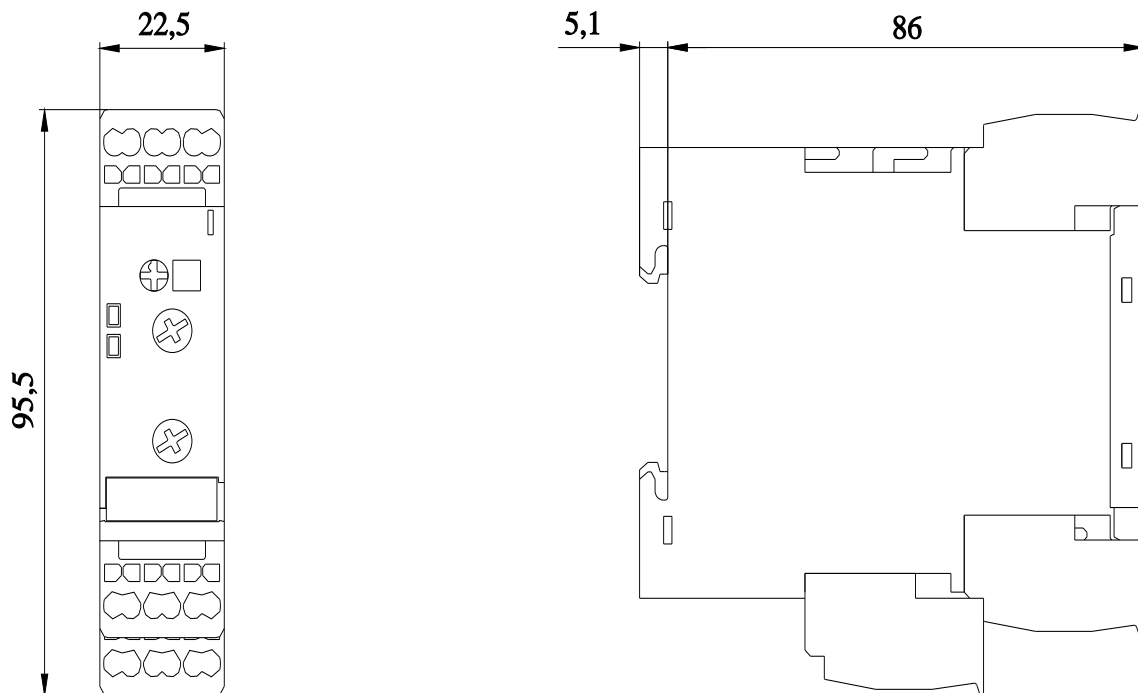

last modified:

9/5/2023