

# KEL-DP | Multi-membrane cable entry plates

pluggable, with high cable density / IP64 / UL Type 12

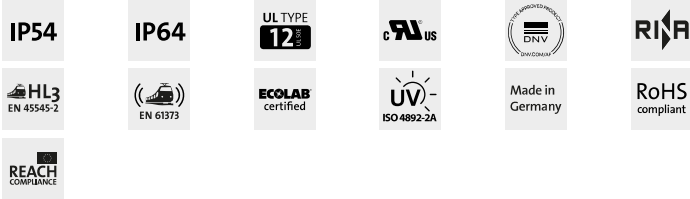


KEL-DP entry plates are designed for routing cables without connectors, hoses or fibre optics in limited space.

The KEL-DP products are an easy to assemble and cost saving alternative to traditional cable glands. Simply make a small hole in the thin membrane and push the cables through. The KEL-DP provides protection IP64 / UL type 12.

The KEL-DP matches exactly the cut-out dimensions of 6-, 10-, 16- and 24-pin standard industrial connectors. The very compact size KEL-DP-E is designed for routing cables in very small space. Through a cut-out of only 18 x 112 mm, up to 21 cables can be easily routed and sealed. A special rib ensures a centred fit in the cut-outs.

[ST-B Plugs](#) can be used for sealing pierced membranes if cables have been removed.



## Specifications


<b>IP rating (EN 60529)</b>	IP54, IP64
<b>Test UL Type (UL 50E)</b>	UL Type 12
<b>Material</b>	Elastomer
<b>Flame class</b>	UL94-V0, self-extinguishing
<b>Operating temperature</b>	-30 C° to 100 C°
<b>Properties</b>	halogen free, silicone free
<b>Mounting options</b>	Snap-in

## Advantages & benefits

- Quick assembly without tools
- High cable density
- Cost-effective solution
- Hygienic design - free of dirt-collecting recesses


## Product types & sizes

### KEL-DP 24|12 A bk




Part No.	<b>50508</b>	Width	<b>44 mm</b>
EAN	<b>4251269314612</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>12</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>15 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>12 x 1 - 15 mm</b>


### KEL-DP 24|12 A gy




Part No.	<b>43508</b>	Width	<b>44 mm</b>
EAN	<b>4251269309830</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>12</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>15 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>12 x 1 - 15 mm</b>

**KEL-DP 24|12 B bk**


Part No.	<b>50510</b>	Width	<b>44 mm</b>
EAN	<b>4251269334634</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>12</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>15 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>12 x 1 - 15 mm</b>

**KEL-DP 24|12 B gy**


Part No.	<b>43510</b>	Width	<b>44 mm</b>
EAN	<b>4251269334627</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>12</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>15 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>12 x 1 - 15 mm</b>

**KEL-DP 24|14 A bk**


Part No.	<b>50512</b>	Width	<b>44 mm</b>
EAN	<b>4251269314636</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>14</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>14 x 1 - 12.1 mm</b>

**KEL-DP 24|14 A gy**


Part No.	<b>43512</b>	Width	<b>44 mm</b>
EAN	<b>4251269309854</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>14</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>14 x 1 - 12.1 mm</b>

**KEL-DP 24|14 B bk**


Part No.	<b>50522</b>	Width	<b>44 mm</b>
EAN	<b>4251269314711</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>14</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>14 x 1 - 12.1 mm</b>

**KEL-DP 24|14 B gy**


Part No.	<b>43522</b>	Width	<b>44 mm</b>
EAN	<b>4251269309939</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>14</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>14 x 1 - 12.1 mm</b>

**KEL-DP 24|17 A bk**


Part No.	<b>50514</b>	Width	<b>44 mm</b>
EAN	<b>4251269314643</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>17</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>12,6 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>5 x 1 - 10.5 mm</b> <b>12 x 1 - 12.6 mm</b>

**KEL-DP 24|17 A gy**


Part No.	<b>43514</b>	Width	<b>44 mm</b>
EAN	<b>4251269309861</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>17</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>12,6 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>5 x 1 - 10.5 mm</b> <b>12 x 1 - 12.6 mm</b>

**KEL-DP 24|17 B bk**


Part No.	<b>50523</b>	Width	<b>44 mm</b>
EAN	<b>4251269314728</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>17</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>12,6 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>5 x 1 - 10.5 mm</b> <b>12 x 1 - 12.6 mm</b>

**KEL-DP 24|17 B gy**

Part No.	<b>43523</b>	Width	<b>44 mm</b>
EAN	<b>4251269309946</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>17</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>12,6 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>5 x 1 - 10.5 mm</b> <b>12 x 1 - 12.6 mm</b>

**KEL-DP 24|18 A bk**


Part No.	<b>50515</b>	Width	<b>44 mm</b>
EAN	<b>4251269314650</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>18</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>4 x 1 - 6.5 mm</b> <b>5 x 1 - 10.5 mm</b> <b>5 x 1 - 12.6 mm</b> <b>4 x 1 - 16.1 mm</b>

**KEL-DP 24|18 A gy**


Part No.	<b>43515</b>	Width	<b>44 mm</b>
EAN	<b>4251269309878</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>18</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>4 x 1 - 6.5 mm</b> <b>5 x 1 - 10.5 mm</b> <b>5 x 1 - 12.6 mm</b> <b>4 x 1 - 16.1 mm</b>

**KEL-DP 24|18 B bk**


Part No.	<b>50528</b>	Width	<b>44 mm</b>
EAN	<b>4251269314773</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>18</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>4 x 1 - 6.5 mm</b> <b>5 x 1 - 10.5 mm</b> <b>5 x 1 - 12.6 mm</b> <b>4 x 1 - 16.1 mm</b>

**KEL-DP 24|18 B gy**


Part No.	<b>43528</b>	Width	<b>44 mm</b>
EAN	<b>4251269309991</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>18</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>4 x 1 - 6.5 mm</b> <b>5 x 1 - 10.5 mm</b> <b>5 x 1 - 12.6 mm</b> <b>4 x 1 - 16.1 mm</b>

**KEL-DP 24|19 A bk**


Part No.	<b>50516</b>	Width	<b>44 mm</b>
EAN	<b>4251269314667</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>19</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>12 x 1 - 6.5 mm</b> <b>7 x 1 - 12.1 mm</b>

**KEL-DP 24|19 A gy**


Part No.	<b>43516</b>	Width	<b>44 mm</b>
EAN	<b>4251269309885</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>19</b>	Cut-out size	<b>112 × 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>12 x 1 - 6.5 mm</b> <b>7 x 1 - 12.1 mm</b>

**KEL-DP 24|19 B bk**

Part No.	<b>50524</b>	Width	<b>44 mm</b>
EAN	<b>4251269314735</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>19</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>12 x 1 - 6.5 mm</b> <b>7 x 1 - 12.1 mm</b>

**KEL-DP 24|19 B gy**

Part No.	<b>43524</b>	Width	<b>44 mm</b>
EAN	<b>4251269309953</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>19</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>12 x 1 - 6.5 mm</b> <b>7 x 1 - 12.1 mm</b>

**KEL-DP 24|26 A bk**


Part No.	<b>50518</b>	Width	<b>44 mm</b>
EAN	<b>4251269314674</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>26</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>16 x 1 - 6.5 mm</b> <b>4 x 1 - 12.1 mm</b> <b>4 x 1 - 16.1 mm</b>

**KEL-DP 24|26 A gy**

Part No.	<b>43518</b>	Width	<b>44 mm</b>
EAN	<b>4251269309892</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>26</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>16 x 1 - 6.5 mm</b> <b>4 x 1 - 12.1 mm</b> <b>4 x 1 - 16.1 mm</b>

**KEL-DP 24|26 B bk**


Part No.	<b>50525</b>	Width	<b>44 mm</b>
EAN	<b>4251269314742</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>26</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>16 x 1 - 6.5 mm</b> <b>4 x 1 - 12.1 mm</b> <b>4 x 1 - 16.1 mm</b>

**KEL-DP 24|26 B gy**


Part No.	<b>43525</b>	Width	<b>44 mm</b>
EAN	<b>4251269309960</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>26</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>16 x 1 - 6.5 mm</b>
			<b>4 x 1 - 12.1 mm</b>
			<b>4 x 1 - 16.1 mm</b>

**KEL-DP 24|42 A bk**


Part No.	<b>50511</b>	Width	<b>44 mm</b>
EAN	<b>4251269314629</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>42</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>4,7 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>12 x 1 - 7.2 mm</b>
			<b>17 x 1 - 6.4 mm</b>
			<b>12 x 1 - 5 mm</b>
			<b>1 x 1 - 4.7 mm</b>

**KEL-DP 24|42 A gy**

Part No.	<b>43511</b>	Width	<b>44 mm</b>
EAN	<b>4251269309847</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>42</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>4,7 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>12 x 1 - 7.2 mm</b>
			<b>17 x 1 - 6.4 mm</b>
			<b>12 x 1 - 5 mm</b>
			<b>1 x 1 - 4.7 mm</b>

**KEL-DP 24|42 B bk**

Part No.	<b>50521</b>	Width	<b>44 mm</b>
EAN	<b>4251269314704</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>42</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>4,7 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>12 x 1 - 7.2 mm</b>
			<b>17 x 1 - 6.4 mm</b>
			<b>12 x 1 - 5 mm</b>
			<b>1 x 1 - 4.7 mm</b>

**KEL-DP 24|42 B gy**


Part No.	<b>43521</b>	Width	<b>44 mm</b>
EAN	<b>4251269309922</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>42</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>4,7 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>12 x 1 - 7.2 mm</b>
			<b>17 x 1 - 6.4 mm</b>
			<b>12 x 1 - 5 mm</b>
			<b>1 x 1 - 4.7 mm</b>

**KEL-DP 24|48 A bk**


Part No.	<b>50519</b>	Width	<b>44 mm</b>
EAN	<b>4251269314681</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>48</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>6,5 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>48 x 1 - 6.5 mm</b>

**KEL-DP 24|48 A gy**


Part No.	<b>43519</b>	Width	<b>44 mm</b>
EAN	<b>4251269309908</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>48</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>6,5 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>48 x 1 - 6.5 mm</b>

**KEL-DP 24|48 B bk**

Part No.	<b>50526</b>	Width	<b>44 mm</b>
EAN	<b>4251269314759</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>48</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>6,5 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>48 x 1 - 6.5 mm</b>

**KEL-DP 24|48 B gy**


Part No.	<b>43526</b>	Width	<b>44 mm</b>
EAN	<b>4251269309977</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>48</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>6,5 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>48 x 1 - 6.5 mm</b>

**KEL-DP 24|50 A bk**


Part No.	<b>50520</b>	Width	<b>44 mm</b>
EAN	<b>4251269314698</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>50</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>33 x 1 - 5.3 mm</b>
			<b>9 x 1 - 6.4 mm</b>
			<b>8 x 1 - 8.3 mm</b>

**KEL-DP 24|50 A gy**


Part No.	<b>43520</b>	Width	<b>44 mm</b>
EAN	<b>4251269309915</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>50</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>33 x 1 - 5.3 mm</b>
			<b>9 x 1 - 6.4 mm</b>
			<b>8 x 1 - 8.3 mm</b>

**KEL-DP 24|50 B bk**


Part No.	<b>50527</b>	Width	<b>44 mm</b>
EAN	<b>4251269314766</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>50</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>33 x 1 - 5.3 mm</b>
			<b>9 x 1 - 6.4 mm</b>
			<b>8 x 1 - 8.3 mm</b>

**KEL-DP 24|50 B gy**


Part No.	<b>43527</b>	Width	<b>44 mm</b>
EAN	<b>4251269309984</b>	Height	<b>12</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>50</b>	Cut-out size	<b>112 x 36 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>2,8 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>4 mm</b>
Length	<b>142 mm</b>	For wall thickness	<b>2,8 - 4 mm</b>
		Clamping range	<b>33 x 1 - 5.3 mm</b>
			<b>9 x 1 - 6.4 mm</b>
			<b>8 x 1 - 8.3 mm</b>

**KEL-DP 16|10 A gy**


Part No.	<b>43460</b>	Width	<b>44 mm</b>
EAN	<b>4251269320750</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>10</b>	Cut-out size	<b>86 x 36 mm</b>
Max. cable diameter	<b>12,2 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>96 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>10 x 1 - 12.2 mm</b>

**KEL-DP 16|11 A gy**


Part No.	<b>43461</b>	Width	<b>44 mm</b>
EAN	<b>4251269320767</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>11</b>	Cut-out size	<b>86 × 36 mm</b>
Max. cable diameter	<b>12,6 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>96 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>3 x 1 - 10.5 mm</b>
			<b>8 x 1 - 12.6 mm</b>

**KEL-DP 16|20 A gy**


Part No.	<b>43462</b>	Width	<b>44 mm</b>
EAN	<b>4251269320774</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>20</b>	Cut-out size	<b>86 × 36 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>96 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>20 x 1 - 8.3 mm</b>

**KEL-DP 16|22 A gy**


Part No.	<b>43463</b>	Width	<b>44 mm</b>
EAN	<b>4251269320781</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>22</b>	Cut-out size	<b>86 × 36 mm</b>
Max. cable diameter	<b>6,5 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>96 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>5 x 1 - 12.1 mm</b>
			<b>4 x 1 - 8.3 mm</b>
			<b>13 x 1 - 6.5 mm</b>

**KEL-DP 16|23 A gy**


Part No.	<b>43464</b>	Width	<b>44 mm</b>
EAN	<b>4251269320798</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>23</b>	Cut-out size	<b>86 × 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>96 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>18 x 1 - 6.5 mm</b>
			<b>5 x 1 - 12.1 mm</b>

**KEL-DP 16|26 A gy**


Part No.	<b>43465</b>	Width	<b>44 mm</b>
EAN	<b>4251269320804</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>26</b>	Cut-out size	<b>86 × 36 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>96 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>19 x 1 - 6.5 mm</b>
			<b>7 x 1 - 8.3 mm</b>

**KEL-DP 10|8 A gy**


Part No.	<b>43466</b>	Width	<b>44 mm</b>
EAN	<b>4251269324000</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>8</b>	Cut-out size	<b>65 × 36 mm</b>
Max. cable diameter	<b>12,6 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>75 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>8 x 1 - 12.6 mm</b>

**KEL-DP 10|12 A gy**


Part No.	<b>43467</b>	Width	<b>44 mm</b>
EAN	<b>4251269324017</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>12</b>	Cut-out size	<b>65 × 36 mm</b>
Max. cable diameter	<b>12,6 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>75 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>4 x 1 - 6.5 mm</b> <b>4 x 1 - 8.3 mm</b> <b>4 x 1 - 12.6 mm</b>

**KEL-DP 10|14 A gy**


Part No.	<b>43468</b>	Width	<b>44 mm</b>
EAN	<b>4251269324024</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>14</b>	Cut-out size	<b>65 × 36 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>75 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>14 x 1 - 8.3 mm</b>

**KEL-DP 10|16 A gy**


Part No.	<b>43469</b>	Width	<b>44 mm</b>
EAN	<b>4251269324031</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>16</b>	Cut-out size	<b>65 × 36 mm</b>
Max. cable diameter	<b>12,6 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>75 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>12 x 1 - 6.5 mm</b> <b>4 x 1 - 12.6 mm</b>

**KEL-DP 10|26 A gy**


Part No.	<b>43470</b>	Width	<b>44 mm</b>
EAN	<b>4251269324048</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>26</b>	Cut-out size	<b>65 × 36 mm</b>
Max. cable diameter	<b>6,5 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>75 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>26 x 1 - 6.5 mm</b>

**KEL-DP 6|6 A gy**


Part No.	<b>43450</b>	Width	<b>44 mm</b>
EAN	<b>4251269320712</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>6</b>	Cut-out size	<b>52 × 36 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>62 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>6 x 1 - 12.1 mm</b>

**KEL-DP 6|12 A gy**


Part No.	<b>43451</b>	Width	<b>44 mm</b>
EAN	<b>4251269320729</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>12</b>	Cut-out size	<b>52 × 36 mm</b>
Max. cable diameter	<b>16,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>62 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>8 x 1 - 6.5 mm</b> <b>2 x 1 - 12.6 mm</b> <b>2 x 1 - 16.1 mm</b>

**KEL-DP 6|14 A gy**

Part No.	<b>43452</b>	Width	<b>44 mm</b>
EAN	<b>4251269320736</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>14</b>	Cut-out size	<b>52 × 36 mm</b>
Max. cable diameter	<b>10,5 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>62 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>10 x 1 - 6.5 mm</b> <b>4 x 1 - 10.5 mm</b>

**KEL-DP 6|25 A gy**


Part No.	<b>43453</b>	Width	<b>44 mm</b>
EAN	<b>4251269320743</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>25</b>	Cut-out size	<b>52 × 36 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>62 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>21 x 1 - 5 mm</b> <b>4 x 1 - 8.3 mm</b>

**KEL-DP-E 46|7 gy**


Part No.	<b>43585</b>	Width	<b>25 mm</b>
EAN	<b>4251269310287</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>7</b>	Cut-out size	<b>46 × 18 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>62 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>5 x 1 - 8.3 mm</b> <b>2 x 1 - 6.5 mm</b>

**KEL-DP-E 46|7 bk**


Part No.	<b>50585</b>	Width	<b>25 mm</b>
EAN	<b>4251269315008</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>7</b>	Cut-out size	<b>46 × 18 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>62 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>5 x 1 - 8.3 mm</b> <b>2 x 1 - 6.5 mm</b>

**KEL-DP-E 46|9 gy**


Part No.	<b>43587</b>	Width	<b>25 mm</b>
EAN	<b>4251269310294</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>9</b>	Cut-out size	<b>46 × 18 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>62 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>8 x 1 - 6.5 mm</b> <b>1 x 1 - 12.1 mm</b>

**KEL-DP-E 46|9 bk**

Part No.	<b>50587</b>	Width	<b>25 mm</b>
EAN	<b>4251269315015</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>9</b>	Cut-out size	<b>46 × 18 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>62 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>8 x 1 - 6.5 mm</b> <b>1 x 1 - 12.1 mm</b>

**KEL-DP-E 86|13 gy**

Part No.	<b>43581</b>	Width	<b>25 mm</b>
EAN	<b>4251269310263</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>13</b>	Cut-out size	<b>85 × 18 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>102 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>11 x 1 - 8.3 mm</b> <b>2 x 1 - 6.5 mm</b>

**KEL-DP-E 86|13 bk**


Part No.	<b>50581</b>	Width	<b>25 mm</b>
EAN	<b>4251269314988</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>13</b>	Cut-out size	<b>85 × 18 mm</b>
Max. cable diameter	<b>8,3 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>102 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>11 x 1 - 8.3 mm</b> <b>2 x 1 - 6.5 mm</b>

**KEL-DP-E 86|17 gy**

Part No.	<b>43583</b>	Width	<b>25 mm</b>
EAN	<b>4251269310270</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>17</b>	Cut-out size	<b>85 × 18 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>102 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>16 x 1 - 6.5 mm</b> <b>1 x 1 - 12.1 mm</b>

**KEL-DP-E 86|17 bk**

Part No.	<b>50583</b>	Width	<b>25 mm</b>
EAN	<b>4251269314995</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>17</b>	For min. wall thickness	<b>1,5 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For max. wall thickness	<b>2,5 mm</b>
Colour	<b>black</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
Length	<b>102 mm</b>	Clamping range	<b>16 x 1 - 6.5 mm</b> <b>1 x 1 - 12.1 mm</b>

**KEL-DP-E 112|16 gy**

Part No.	<b>43576</b>	Width	<b>25 mm</b>
EAN	<b>4251269310249</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>16</b>	Cut-out size	<b>112 × 18 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>128 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>4 x 1 - 6.5 mm</b> <b>11 x 1 - 8.3 mm</b> <b>1 x 1 - 12.1 mm</b>

**KEL-DP-E 112|16 bk**

Part No.	<b>50576</b>	Width	<b>25 mm</b>
EAN	<b>4251269314964</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>16</b>	Cut-out size	<b>112 × 18 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>128 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>4 x 1 - 6.5 mm</b> <b>11 x 1 - 8.3 mm</b> <b>1 x 1 - 12.1 mm</b>

**KEL-DP-E 112|21 gy**

Part No.	<b>43578</b>	Width	<b>25 mm</b>
EAN	<b>4251269310256</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>21</b>	Cut-out size	<b>112 × 18 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>128 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>16 x 1 - 6.5 mm</b> <b>4 x 1 - 8.3 mm</b> <b>1 x 1 - 12.1 mm</b>

**KEL-DP-E 112|21 bk**

Part No.	<b>50578</b>	Width	<b>25 mm</b>
EAN	<b>4251269314971</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>21</b>	Cut-out size	<b>112 x 18 mm</b>
Max. cable diameter	<b>12,1 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>128 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>16 x 1 - 6.5 mm</b>
			<b>4 x 1 - 8.3 mm</b>
			<b>1 x 1 - 12.1 mm</b>

**KEL-DP-S 69|8 gy**

Part No.	<b>43591</b>	Width	<b>19,5 mm</b>
EAN	<b>4251269310300</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>8</b>	Cut-out size	<b>69 x 10 mm</b>
Max. cable diameter	<b>7,5 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>grey (similar RAL 7035)</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>78 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>8 x 1 - 7.5 mm</b>

**KEL-DP-S 69|8 bk**

Part No.	<b>50591</b>	Width	<b>19,5 mm</b>
EAN	<b>4251269315022</b>	Height	<b>12 mm</b>
Package quantity	<b>10</b>	Mounting height	<b>5 mm</b>
For max. no. of cables	<b>8</b>	Cut-out size	<b>69 x 10 mm</b>
Max. cable diameter	<b>7,5 mm</b>	For min. wall thickness	<b>1,5 mm</b>
Colour	<b>black</b>	For max. wall thickness	<b>2,5 mm</b>
Length	<b>78 mm</b>	For wall thickness	<b>1,5 - 2,5 mm</b>
		Clamping range	<b>8 x 1 - 7.5 mm</b>